

AMC714

QorIQ P5010/5020 Processor AMC,
SRIO



AMC714

Key Features

- Processor AMC with Freescale QorIQ P5010/P5020
- Up to 16 GB DDR3 with ECC
- SRIO on ports 4-7 and 8-11 per AMC.4
- GbE per AMC.2
- Front panel 10GbE via SFP+
- Dual SATA per AMC.3
- Single-module, mid-size per AMC.0
- Option for up to 32 GB SDHC

Benefits

- High single-threaded performance for compute-plane applications
- Embedded data path acceleration for network processing
- SRIO dual x4 to backplane and 10GbE to front panel supports high-throughput communications
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Full ecosystem from the industry leader

AdvancedMC™



vadatech
THE POWER OF VISION



AMC714

The AMC714 is a Processor AMC (PrAMC) in a single module, mid-size AdvancedMCTM (AMC) form factor based on the Freescale P5010 (single core) and P5020 (dual core) processors. The module follows the AMC.2, AMC.3 and AMC.4 specifications.

The module front panel provides GbE via RJ-45, 10 GbE via SFP+ and RS-232 via Micro USB connectors.


The module provides dual x4 SRIO on ports 4-11 per AMC.4 and dual GbE on ports 0 and 1 per AMC.2 to the rear. It routes dual SATA to ports 2 and 3 per AMC.3.

The module has option for up to 16 GB of DDR-3 memory with ECC, 32 MB NOR flash, 8 MB SPI flash, 512 KB I2C flash, 256 MB NAND flash and optional 32 GB SDHC.


The AMC714 has a Serial over LAN (SoL) with a true hardware Random Number Generator.



Block Diagram

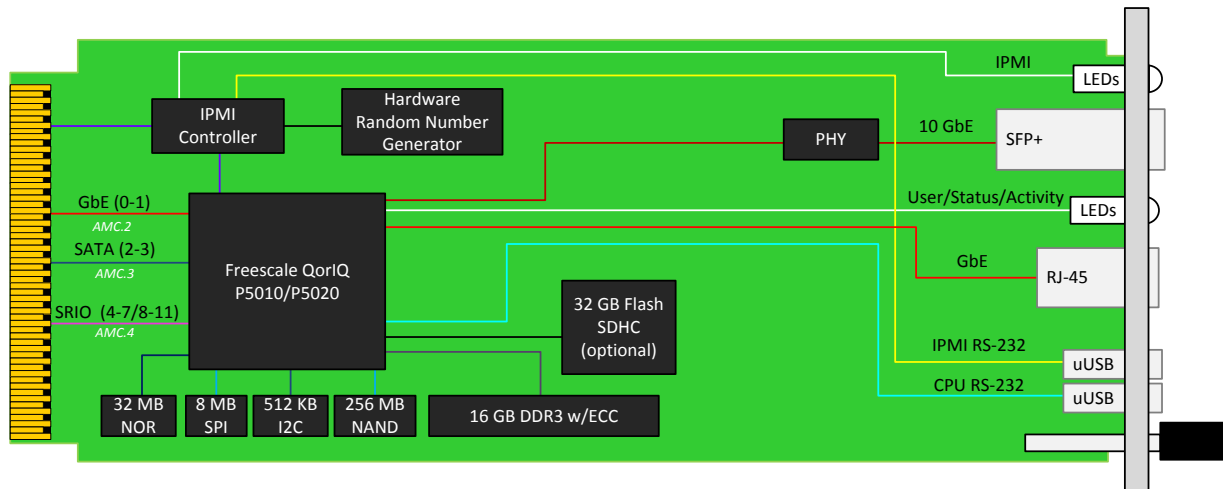

Front Panel

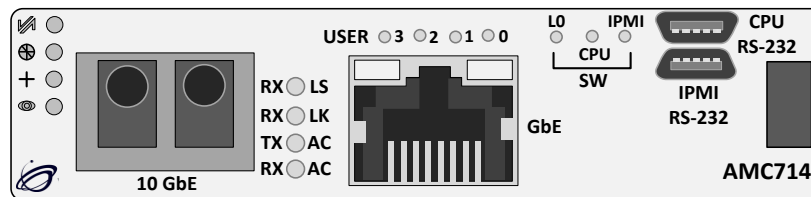

Specifications

Architecture	
Physical	Dimensions Single module, mid-size (full-size optional) Width: 2.89" (73.5 mm) Depth 7.11" (180.6 mm)
Type	Freescale QorIQ P5010 or 5020 processor up to 2.0 GHz Up to 16 GB DDR3 with ECC
Standards	
AMC	Type AMC.0, AMC.2, AMC.3 and/or AMC.4
Module Management	IPMI IPMI version 2.0
SRIO	Lanes Dual x4
Configuration	
Power	AMC714 ~45 W
Environmental	Temperature Operating temperature: -5° to 45° C (55°C for limited time, performance restrictions may apply), industrial versions also available (See environmental spec sheet) Storage Temperature: -40° to +85°C
	Vibration Operating 9.8 m/s ² (1G), 5 to 500Hz on each axis
	Shock Operating 325G / 2 ms, 160G / 1 ms
	Relative Humidity 5 to 95 per cent, non-condensing
Front Panel	Interface Connectors Single GbE via RJ-45, 10 GbE via SFP+ CPU RS-232 via micro USB IPMI RS-232 via micro USB
	LEDs IPMI management control Activity / Link user LEDs
	Mechanical Hot swap ejector handle
Software Support	Operating System Linux and Windows
Conformal Coating	Humiseal 1A33 Polyurethane (Optional) Humiseal 1B31 Acrylic (Optional)
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty	Two (2) years

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

Ordering Options

AMC714 – ABC-DE0-00J

A = CPU Speed 1 = Reserved 2 = P5010 @ 1.8 GHz 3 = Reserved 4 = P5020 @ 2.0 GHz	D = SDHC 0 = None 1 = Reserved 2 = 32 GB*	
B = DDR3 0 = 4 GB 1 = 8 GB 2 = 16 GB	E = SFP+ Transceiver 0 = None 1 = 10GBASE-SR 2 = Reserved 3 = 10GBASE-LRM 4 = 10GBASE-LR	
C = Front Panel Size 1 = Reserved 2 = Mid-size, MTCA.0 3 = Full-size, MTCA.0 4 = Reserved 5 = Mid-size, MTCA.1 (captve screws) 6 = Full-size, MTCA.1 (captve screws)		J = Temperature Range and Coating 0 = Commercial (–5° to +55° C), No coating 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70° C), No coating 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic

* VadaTech reserves the right to supply larger capacity unless specifically stated otherwise on the Purchase Order.

Related Products

AMC702



- Processor AMC with QorIQ T4240
- SRIO on ports 4-11
- Three banks of 64-bit DDR3 memory (up to 12GB total)

UTC004



- Unified 1GHz quad-core CPU for MCMC (MicroTCA Carrier Management Controller), Shelf Manager, Clocking, and Fabric management
- Automatic fail-over with redundant UTC004s
- 1GbE base switch with dual 100/1000/10G uplink

VT866



- MTCA System Platform 19" x 5U x 17"
- Full redundancy with dual MicroTCA Carrier Hub (MCH), dual Cooling Units and dual Power Modules
- Up to 12 AMCs in single width/full-size

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way, Ocean Village,
Southampton, SO14 3JZ

Phone: +44 2380 381982 | Fax: +44 2380 381983

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2017 VadaTech Incorporated, All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 2.2 – SEP/17