

ATCA 10GbE Cut-Away Carrier with Quad AMC Slots – ATC134

ATCA Carrier, 4 Full-Size AMCs



KEY FEATURES

- ATCA cut-away carrier with four full-size AMC slots
- Accepts AMCs compliant to AMC.2 specification
- 10GbE Managed Layer 2 switch
- Each AMC slot receives two 10GbE and two GbE
- Connectivity to two base channels and eight fabric channels
- Four 10GbE routed to the RTM
- IPMI v2.0 compliant
- RoHS compliant

AdvancedTCA®

Benefits of Choosing VadaTech

- Managed Layer 2 switch performance with the versatility of 4 AMC full-size slots
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company

The ATC134 is VadaTech second generation AdvancedTCA AMC carrier that provides four full-size AMC slots.

Each of the AMC module ports 4-7 and 8-11 are connected to the Layer 2 managed 10GbE switch. Ports 0 and 1 are connected to the 10GbE switch by GbE. The ATC134 provides up to 250W to the four AMC Modules.


The ATC134 has two base channels and eight fabric channels. Further the ATC134 has four 10GbE ports routed to the RTM.

ATCA 10GbE Cut-Away Carrier with Quad AMC Slots – ATC134

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

BLOCK DIAGRAM

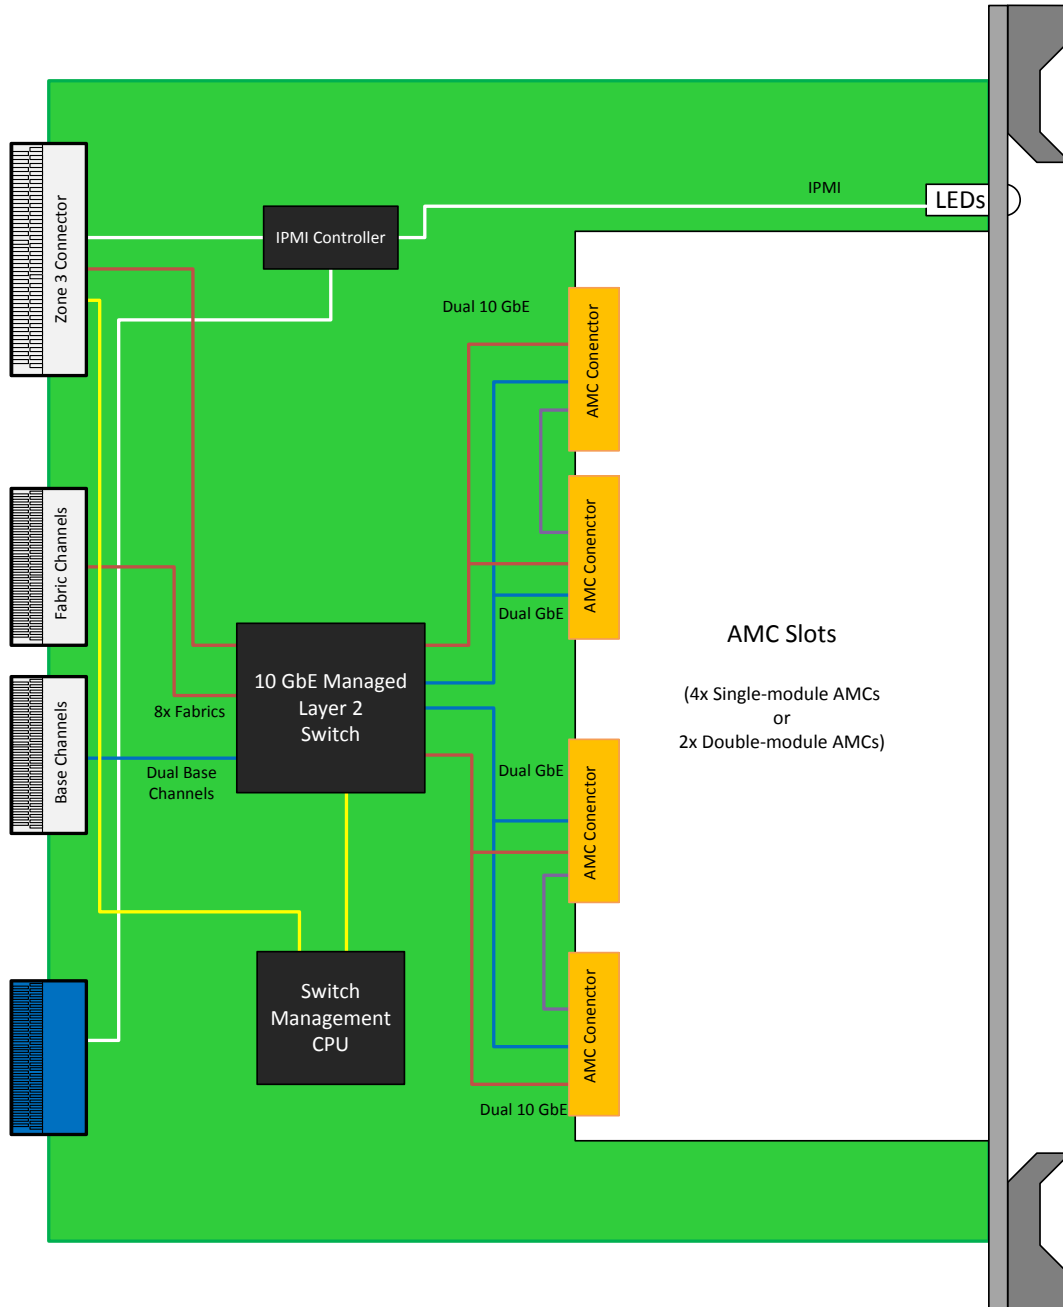

SPECIFICATIONS

Architecture		
Physical	Dimensions	Width: 12.687" (322.25 mm)
		Depth: 11.024" (280 mm)
Type	ATCA Switch/Carrier	Four full-size AMC slots
10GbE	AMC Lanes	4-11 (dual 10GbE)
GbE	AMC Lanes	0-1 (dual GbE)
Standards		
AMC	Type	AMC.2 (AMC.3 between Slot B4 and B3, B2 and B1)
Module Management	IPMI	IPMI version 2.0 and PICMG 3.0
PICMG	ATCA	PICMG 3.0 R2.0
Configuration		
Power	ATC134	50 W with no AMCs
Environmental	Temperature	Operating Temperature: -5° to 55°C (Air flow requirements is to be greater than 200 LFM) Available in industrial temperature range Storage Temperature: -40° to +60°C
	Vibration	0.5 G RMS, 20 to 20000 Hz random (operating) 6 Gs RMS (non-operating)
	Shock	30 Gs on each axis
	Relative Humidity	5 to 95 per cent, non-condensing
Software Support	Operating System	Linux
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTFB		MIL Handbook 217-F@TBD Hrs
Certifications		Designed to meet FCC, CE and UL certifications where applicable
Compliance		PICMG 3.0 Rev 3.0, RoHS 2.
Standards		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty		Two (2) years
Trademarks and Disclaimer		The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice

ATCA 10GbE Cut-Away Carrier with Quad AMC Slots – ATC134

ORDERING OPTIONS

ATC134 – 000 – 000 – 0HJ

H = Temperature Range

- 0 = Commercial
- 1 = Industrial

J = Conformal Coating

- 0 = None
- 1 = Humiseal 1A33 Polyurethane
- 2 = Humiseal 1B31 Acrylic

RELATED PRODUCTS



VT830 6U ATCA SlotSaver
Chassis



ATC806 40G/10G Switch
w/Dual AMCs



ART132 ATCA
RTM

CONTACT US

VadaTech Corporate Office

198 N. Gibson Rd.
Henderson, NV 89014
Email: info@vadatech.com
Telephone: (702) 896-3337
Fax: (702) 896-0332

Asia Pacific Sales Office

7th Floor, No. 2, Wenhui Street, Neihu District, Taipei
City, Taiwan 11445
Email: info@vadatech.com
Telephone: +886-2-2627-7655
Fax: +886-2-2627-7792

VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way,
Ocean Village, Southampton, SO14 3JZ
Email: info@vadatech.com
Telephone: +44 2380 381982
Fax: +44 2380 381983