

# AMC537

## Altera Carrier for FMC, Stratix-10™, SoC

### Key Features

- Altera Stratix-10 System-On-Chip (SoC)
- Option for SX1650 or SX2800
- AMC Ports 4-11 are routed to FPGA per AMC.1, AMC.2 and AMC.4
- AMC Ports 12-15 and 17-20 are routed to the FPGA
- Single module, mid-size AMC (full-size optional)
- AMC FCLKA, TCLKA, TCLKB, TCLKC and TCLKD are routed
- Clock jitter cleaner
- 16 GB of DDR4 (dual bank, 64-bit)

### Benefits

- Stratix-10 SoC FPGA
- Dual Bank of 64-bit wide DDR4 memory allows larger buffer sizes while processing and queuing data to the host
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



**vadatech**  
THE POWER OF VISION

**AdvancedMC™**



# AMC537

The AMC537 is based on the Altera Stratix-10™ SoC SX1650/2800 FPGA with integrated quad-core ARM Cortex-A53 and is compliant to AMC.1, AMC.2, AMC.3 and/or AMC.4 specifications.

The module routes all LA/HA/HB and 10 DP SERDES to the FMC slot.

The onboard, re-configurable FPGA interfaces directly to the AMC FCLKA and TCLKA–D via a Cross Bar Switch (CBS) MLVDS. It also has two banks of DDR4 (64-bit wide) giving 16 GB total memory. This allows for large buffer sizes to be stored during processing as well as for queuing the data to the host.

The integrated quad ARM A53 core runs at 1.5 GHz with its own dedicated 2 GB of DDR4 memory. The module also has 4 GB of eMMC Flash.

See [Intel FPGA Solutions](#) for the advantages of using VadaTech products during application development.

# Block Diagram

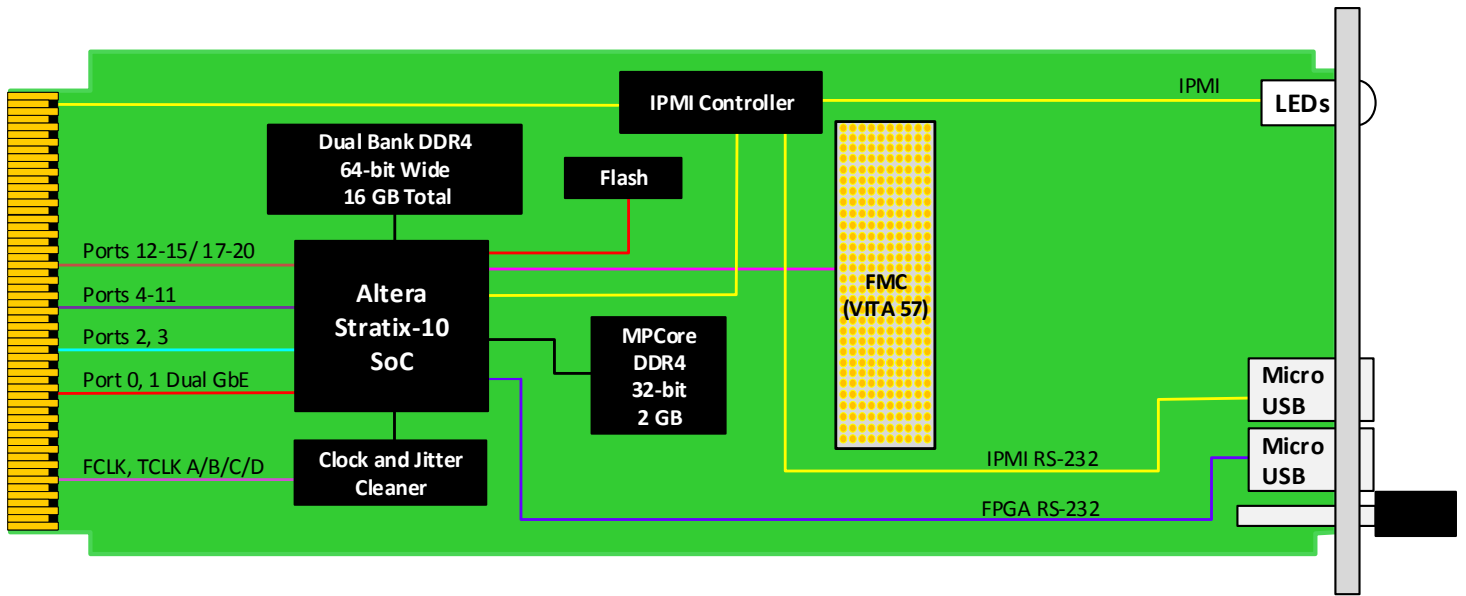


Figure 1: AMC537 Functional Block Diagram

# Reference Design

VadaTech provides an extensive range of FPGA-based products. The FPGA products are in two categories; FPGA boards with FMC carriers and FPGA products with high speed ADC and DACs. The FPGA products are designed in various architectures such as AMC modules, PCIe cards and Open VPX.

VadaTech provides a reference design implementation for our FPGAs complete with VHDL source code, documentation and configuration binaries. The reference design focuses on the I/O ring of the FPGA to demonstrate low-level operation of the interconnections between the FPGA and other circuits on the board and/or backplane. It is designed to prove out the hardware for early prototyping, engineering/factory diagnostics and customer acceptance of the hardware, but it does not strive to implement a particular end application. The reference VHDL reduces customer time to develop custom applications, as the code can be easily adapted to meet customer's application requirements.

The reference design allows you to test and validate the following functionality (where supported by the hardware):

- Base and Fabric channels
- Clocks
- Data transfers
- Memory
- User defined LEDs

VadaTech provides reference VHDL for testing basic hardware functionality. The reference VHDL is provided royalty free to use and modify on VadaTech products, so can be used within applications at no additional cost. However, customers are restricted from redistributing the reference code and from use of this code for any other purpose (e.g. it should not be used on non-VadaTech hardware).

The reference VHDL is shipped in one or more files based on a number of ordering options. Not all ordering options have an impact on the FPGA and a new FPGA image is created for those options that have direct impact on the FPGA. Use the correct reference image to test your hardware. For more information, refer to the FPGA reference design manual for your device which can be accessed from the customer support site along with the reference images.

## Supported Software

- Default FPGA image stored in flash memory
- Linux BSP
- Build Scripts
- Device Driver
- Reference application projects for other ordering options

The user may need to develop their own FPGA code or adapt VadaTech reference code to meet their application requirements. The supplied pre-compiled images may make use of hardware evaluation licenses, where necessary, instead of full licenses. This is because VadaTech does not provide licenses for the development tools or silicon vendor IP cores, so please contact FPGA vendor where these are required.

# Specifications

Architecture		
<b>Physical</b>	<b>Dimensions</b>	Single module, mid-size (full-size optional) Width: 2.89" (73.5 mm) Depth 7.11" (180.6 mm)
<b>Type</b>	<b>AMC FPGA</b>	Stratix-10™ SoC FPGA
<b>Memory</b>		Dual bank of DDR4 (64-bit wide)
Standards		
<b>AMC</b>	<b>Type</b>	AMC.0, AMC.1, AMC.2, AMC.3 and AMC.4
<b>Module Management</b>	<b>IPMI</b>	IPMI v2.0
<b>PCIe</b>	<b>Lanes</b>	Dual x4 or single x8 via FPGA to AMC
<b>SRIO</b>	<b>Lanes</b>	Dual x4 via FPGA to AMC
<b>Ethernet</b>	<b>1/10/40GbE</b>	Dual 1/10/40GbE via FPGA (Ports 0-1 and 4-11)
Configuration		
<b>Power</b>	<b>AMC537</b>	~40W (application specific)
<b>Environmental</b>	<b>Temperature</b>	See <a href="#">Ordering Options</a> and <a href="#">Environmental Spec Sheet</a> Storage Temperature: -40° to +85°C
	<b>Vibration</b>	Operating 9.8 m/s <sup>2</sup> (1G), 5 to 500 Hz on each axis
	<b>Shock</b>	30G each axis
	<b>Relative Humidity</b>	5 to 95% non-condensing
<b>Front Panel</b>	<b>Interface Connectors</b>	Dual micro USB for MGT RS-232 and FPGA RS-232 Single FMC slot
	<b>LEDs</b>	IPMI management control Four user LEDs
	<b>Mechanical</b>	Hot-swap ejector handle
<b>Software Support</b>	<b>Operating System</b>	Linux
Other		
<b>MTBF</b>		MIL Hand book 217-F@ TBD hrs
<b>Certifications</b>		Designed to meet FCC, CE and UL certifications, where applicable
<b>Standards</b>		VadaTech is certified to both the ISO9001:2015 and AS9100D standards
<b>Warranty</b>		Two (2) years, see <a href="#">VadaTech Terms and Conditions</a>

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## AMC537 – A0C-DEF-G0J

A = Ports 12-15/17-20	D = FPGA	G = Clock Holdover Stability
0 = Not routed to FPGA 1 = Routed to FPGA	0 = SX1650 1 = SX2800 2 = Reserved 3 = Reserved	0 = Standard XO 1 = Stratum-3 (TCXO)
	E = FPGA Speed	
	1 = Highest 2 = High 3 = Reserved	
C = Front Panel Size	F = PCIe Option	J = Temperature Range and Coating
1 = Reserved 2 = Mid-size (4 HP) 3 = Full-size (6 HP) 5 = Mid-size, MTCA.1 (captive screw) 6 = Full-size, MTCA.1 (captive screw)	0 = No PCIe 1 = PCIe on Ports 4-7 2 = PCIe on Ports 8-11 3 = PCIe on Ports 4-11	0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane* 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic*

**Notes:**  
 \*Conduction cooled; temperature is at edge of module. Consult factory for availability  
 For operational reasons VadaTech reserves the right to supply a higher speed FPGA device than specified on any particular order/delivery at no additional cost, unless the customer has entered into a Revision Lock agreement with respect to this product

## Related Products

AMC535



- Single module, mid-size AMC (full-size optional)
- Altera Arria-10 SOC (System on Chip) SX660 in F1517 package
- AMC Ports 4-11 are routed to FPGA per AMC.1, AMC.2 and AMC.4

AMC757



- Processor AMC Intel® Xeon® Processor E3-1505M v6 (Kaby Lake)
- 40GbE (or 10GbE) on Ports 4-7 and 8-11 (AMC.2)
- Serial Over LAN (SOL)

FMC250



- Dual AD9625 ADC 12-bit @ 2.6/2.5/2.0 GSPS
- 8 JESD204B lanes from each ADC is routed to the FMC+ connector
- Single DAC AD9164/AD9162 16-bit @ 12 GSPS

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

[info@vadatech.com](mailto:info@vadatech.com) | [www.vadatech.com](http://www.vadatech.com)

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



**vadatech**  
THE POWER OF VISION

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 1.4 – FEB/20