

AMC761

Intel® Xeon® Processor E-2176M
or E-2276ME AMC, 10/40GbE



AMC761

Key Features

- Processor AMC Intel® Xeon® Processor E-2176M or E-2276ME(Coffee Lake)
- 40GbE (or 10GbE) on Ports 4-7 and 8-11 (AMC.2)
- Serial Over LAN (SOL)
- 32 GB of DDR4 memory with ECC
- 64 GB of Flash memory
- Trusted Platform Management (TPM)
- Single module, mid-size (option for full-size) per AMC.0

Benefits

- High performance Xeon® Processor E-2176M or E-2276ME with CM246 PCH
- Availability of chassis supporting 40G-capable backplanes
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION

AdvancedMC™



AMC761

The AMC761 is a Processor AMC (PrAMC) in a single module, mid-size Advanced Mezzanine Card (AMC) form factor based on the Intel® Xeon® Processor E-2176M or E-2276ME (Coffee Lake) with CM246 PCH. The processor base frequency is 2.7 GHz with max turbo frequency of 4.4 GHz. The module follows the AMC.2 and the AMC.3 specifications.

The unit provides dual 40GbE or dual XAUI on Ports 4-11 per AMC.2, dual GbE on Ports 0 and 1 per AMC.2, and SATA on Ports 2 and 3 per AMC.3. It also provides GbE to the front panel.

The AMC761 has up to 32 GB of DDR4 memory with ECC and 64 GB of Flash for OS. The BIOS allows booting from onboard NAND, offboard SATA, PXE boot as well as USB. There are dual USB 3.0 type C connectors for extended storage or peripherals. The module has Trusted Platform Management (TPM) capabilities.

Linux OS is standard on the AMC761, consult VadaTech for other options.



Figure 1: AMC761

Block Diagram

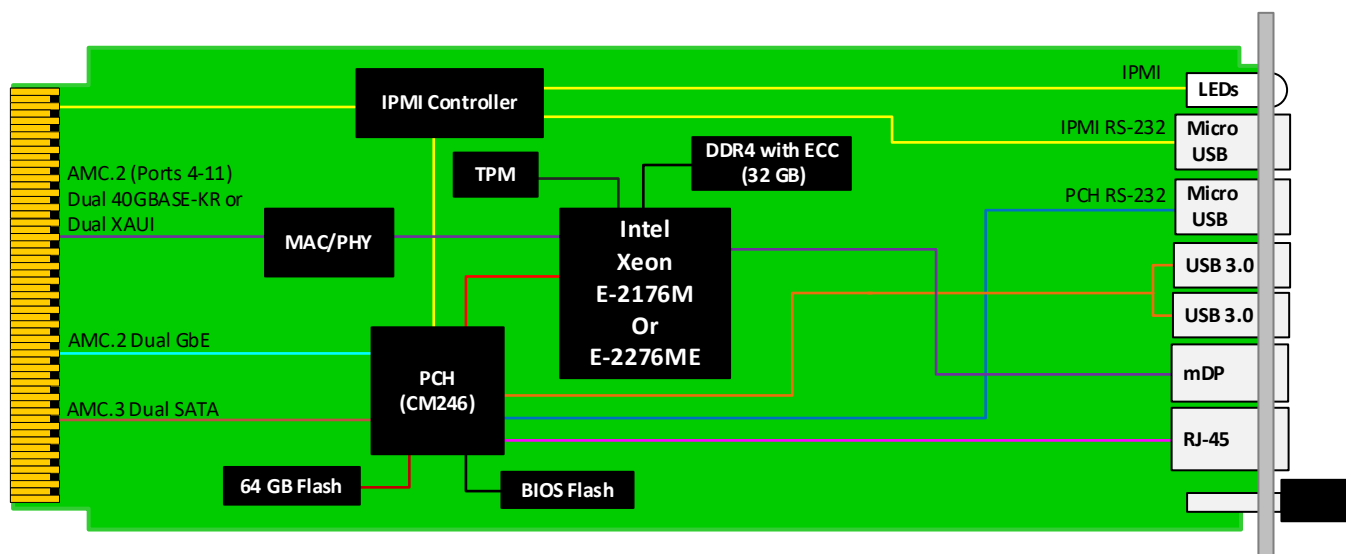


Figure 2: AMC761 Functional Block Diagram

Front Panel

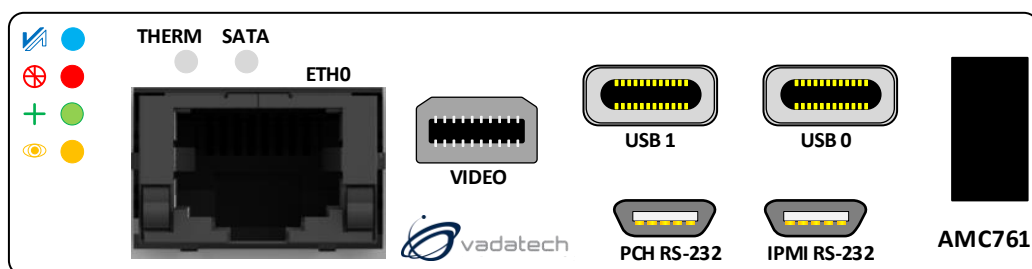


Figure 3: AMC761 Front Panel

Specifications

Architecture		
Physical	Dimensions	Width: 2.89" (73.5 mm)
		Depth: 7.11" (180.6 mm)
Type	AMC Processor	Intel® Xeon® Processor E-2176M or E-2276ME AMC
Standards		
AMC	Type	AMC.0, AMC.2 and/or AMC.3
Module Management	IPMI	IPMI v2.0
10/40GbE	Lanes	Dual XAUI or dual 40GBase-KR4
Configuration		
Power	AMC761	~58W
Environmental	Temperature	See Ordering Options and Environmental Spec Sheet
		Storage Temperature: -40° to +90°C
	Altitude	Chassis dependent
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	1x RJ-45 for GbE
		2x USB type C connectors for USB 3.0
		2x Micro USB for IPMI RS-232 and PCH RS-232
		1x Mini Display Port for graphics
	LEDs	IPMI, activity and user defined
	Mechanical	Hot-swap ejector handle
Software Support	Operating System	Linux (consult VadaTech for other options)
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

AMC761 – ABC-D00-00J

A = DDR4 Memory	D = CPU	
0 = Reserved 1 = 16 GB 2 = 32 GB	0 = E-2176M 1 = E-2276ME 2 = Reserved	
B = Flash Storage		
0 = Reserved 1 = 64 GB		
C = Front Panel Size	J = Temperature Range and Coating*	
1 = Reserved 2 = Mid-size 3 = Full-size 4 = Reserved 5 = Reserved 6 = Mid-size, MTCA.1/4 7 = Full-size, MTCA.1/4 8 = Reserved	0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic	

Notes:

*Edge of module for conduction cooled boards, consult factory for availability

Related Products

UTC004



- Unified 1 GHz quad-core CPU for MCMC, Shelf Manager, Clocking, and Fabric management
- Automatic fail-over with redundant UTC004s
- Full Layer 2 or 3 managed Ethernet switches

UTC020



- Single module, full-size per AMC.0
- Dual -36V DC to -75V DC input, 936W (available in 468W)
- Hot swappable with support for power module redundancy

VT866



- MTCA System Platform 19" x 5U x 10.5" deep (with handles 12" deep)
- Full redundancy with dual MicroTCA Carrier Hub (MCH), dual Cooling Units and dual Power Modules
- Up to 12 AMCs in single width/full-size

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.5 – SEP/23