

VPX982

Chassis Manager with JTAG Switch Module (JSM), 3U VPX



VPX982

Key Features

- Quad Core ARM Cortex-A53 processor @ 1.6 GHz per core
- 4GB DDR4 memory with FRAM for log messages
- 64GB Flash
- JSM with 12 JTAG Ports
- I2C Real Time Clock with battery backup
- Low power (4W)
- Based on VadaTech VT040 Module
- IPMI 2.0 compliant

Benefits

- Supports VITA 46.11 Tier-2 command set
- Utilizing VadaTech VT040 fourth generation Shelf
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

OpenVPX™



vadatech
THE POWER OF VISION



VPX982

The VadaTech VPX982 Chassis Manager is based on the VITA 46.11 specification. The VITA 46.11 leverages the Intelligent Platform Management Interface (IPMI) and AdvancedTCA Specification by PICMG as its architectural foundation. The Module is based on VadaTech VT040 Product [VT040 - Shelf Manager, 4th Generation ATCA, MTCA and VPX platforms \(vadatech.com\)](http://www.vadatech.com).

The VadaTech Chassis Management solution is derived from our field proven VadaTech ATCA Shelf Manager utilizing core interfaces such as the Simple Network Management Protocol (SNMP), Remote Management Control Protocol (RMCP), Web Interface, System Management application (Scorpionware™), and a user-friendly Command Line Interface.

VadaTech VPX IPMC and Chassis Management solutions support VITA 46.11 Tier-2 command set, providing a higher level of functionality in the management layer and chassis cooling capabilities. Additionally, VadaTech VPX management solutions have taken advantage of the HPM.1 PICMG Specification providing a framework for upgrading the IPMC firmware.

The Module has GbE as 1000Base-TX from the front panel connecting to the Shelf Manager. It also has dual GbE to P1 as 1000Base-BX (SERDES Based).

The module also has an option for JTAG Switch Module (JSM) and optional Virtual Probe, easing device access within the chassis for FPGA code developers. The JTAG Ports from each VPX module are routed to the P2 for a total of 12 modules. This allows maximum flexibility within the chassis. The JSM is configured via either the front panel JTAG Port, or the optional Virtual JTAG (VTMJTAG) command line of the management CPU. The optional Virtual JTAG feature is available via either one of the GbE Ports (front or rear).

The JSM can also be used as a standalone module, so multiple JTAG dongles are not needed within the chassis.



Figure 1: VPX982

JTAG Master/JTAG via Ethernet Virtual Probe

The VPX982 provides JTAG Master Capability to send out configuration data streams via the chassis JSM to configure arbitrary JTAG Slave devices on the VPX cards. Virtual Probe services are also available to provide JTAG via Ethernet for Xilinx FPGAs. This allows for standard development tools such as Xilinx iMPACT/ChipScope to treat the MCH/JSM combination as if it was a standard JTAG probe. This approach frees the developer from having to attach JTAG probes directly to the VPX or JSM which can be difficult when systems are already fully assembled. It also allows for remote debugging across long distances when required without the need to install additional JTAG equipment on-site.

Scorpionware™ Software

VadaTech's Scorpionware™ software can be used to access information about the current state of the Shelf or the Carrier, obtain information such as the FRU population, or monitor alarms, power management, current sensor values, and the overall health of the Shelf. The software GUI is very powerful, providing a Virtual Carrier and FRU construct for a simple, effective interface.

IPMI Protocol Analyzer

VPX982 can be used as an IPMI protocol analyzer. Figur shows the trace viewer output from VPX982.

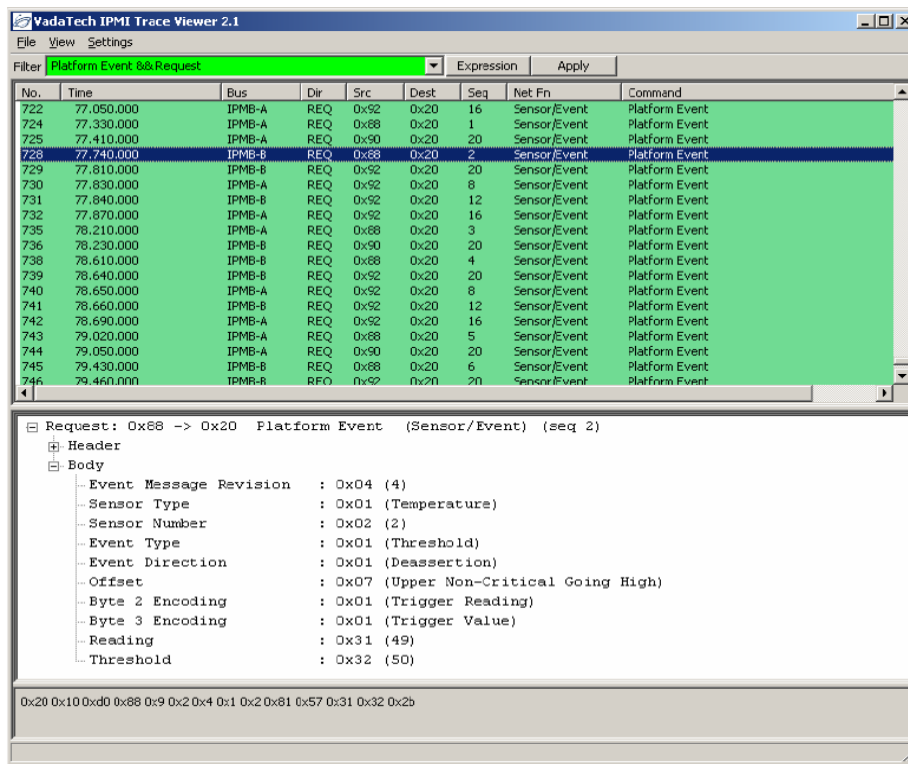


Figure 2: IPMI Protocol Analyzer Trace Viewer Output

Block Diagram

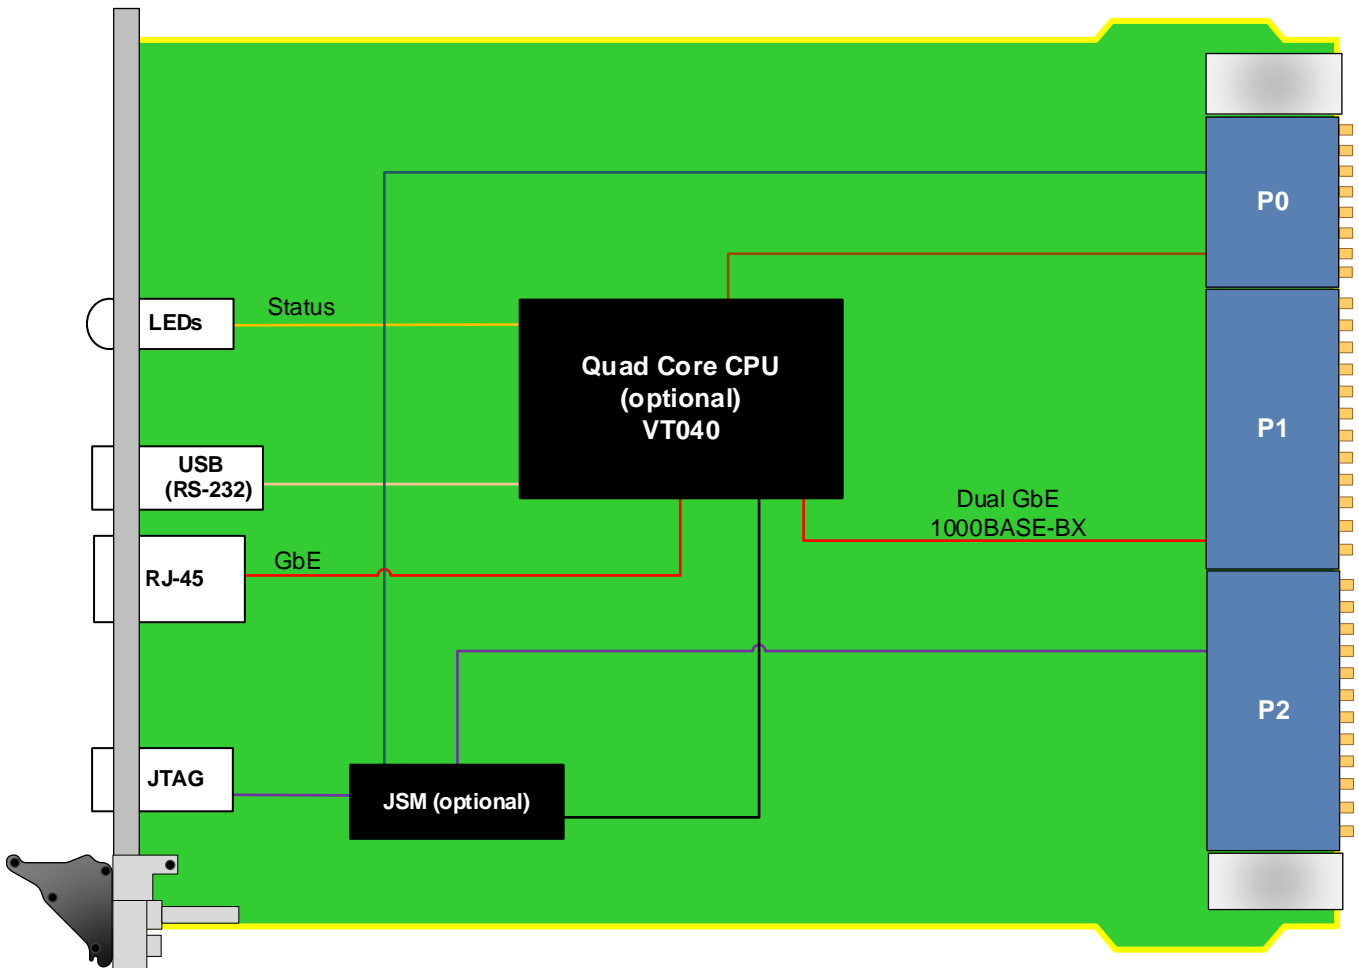


Figure 3: VPX982 Functional Block Diagram

Pinout Block Diagram

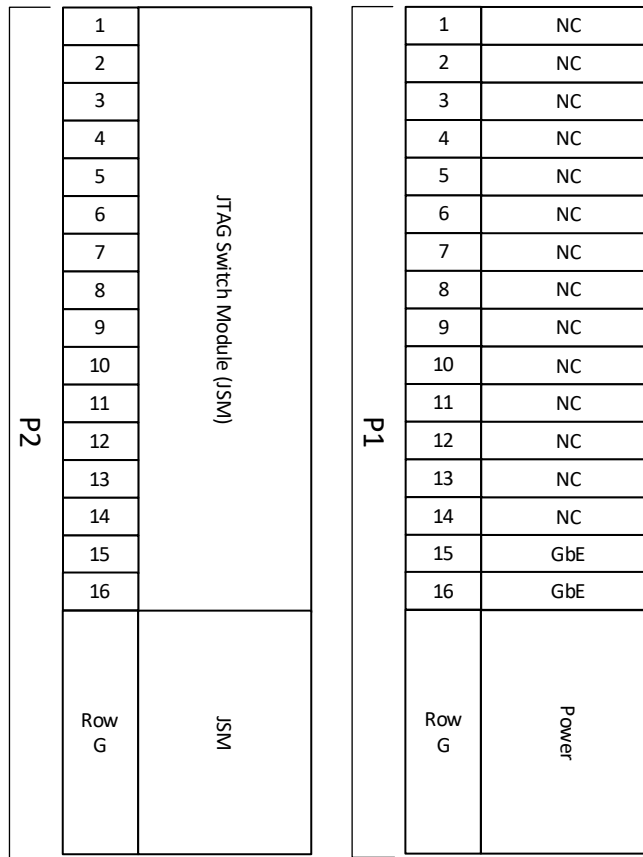


Figure 4: VPX982 Pinout Block Diagram

Specifications

Architecture	
Physical	Dimensions 3U, 1" pitch
Standards	
Module Management	IPMI VadaTech VPX Shelf Manager and JTAG Switch Module
Configuration	
Power	VPX982 ~4W
Environmental	Temperature See Ordering Options
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty	Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VPX982 – ABC-D0F-GHJ

A = Shelf Manager 0 = No VT040 1 = VT040	D = P1 Connector 0 = Not installed 1 = Installed	G = Applicable Slot Profiles and Pitch 0 = 5 HP VITA48 1 = 5 HP IEEE1101.1
B = JSM 0 = No JSM 1 = JSM		H = Environmental See Environmental Specification
C = VPX Connector Type 0 = Standard 50u Gold Rugged 1 = KVPX Connectors	F = JTAG Virtual Probe* 0 = No Virtual Probe 1 = Virtual Probe	J = Conformal Coating 0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Notes:

*If Option F=1 is required, Option A=1 and B=1 must also be ordered.

Environmental Specification

Option H	Air Cooled		Conduction Cooled		
	H = 0	H = 1	H = 2	H = 3	H = 4
Operating Temperature	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes:

*Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

Related Products

VPX551



- Dual Kintex UltraScale™ XCKU115
- 16 GB of 64-bit wide DDR4 Memory to each FPGA
- Rear fibre I/O via VITA 66.5

VPX645



- 3U VPX NVMe Host Bus Adapter with Full support for RAID
- Dual Core ARM A15 RAID on Chip (ROC)
- Onboard 8 GB of DDR4 Memory with ECC

VPX752



- 6U VPX module Intel 5th Generation Xeon-D SoC
- PCIe Gen3 x16 (dual x8 or quad x4)
- Quad 10GbE XAU1

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.2 – MAY/23