

## AMC Dual Port 10GbE iSCSI Offload – AMC234

### Dual Port iSCSI Offload



### KEY FEATURES

- iSCSI offload engine in AMC format
- AMC.1 compliant
- PCIe Gen 2 x8 lanes or PCIe Gen 3 x4 lanes
- Dual SFP+
- Line rate on all ports
- Jumbo frames of up to 9 KB
- IPv6 support for TCP/IP (RFC2460)
- IEEE: 802.3ae, 802.1q (VLAN), 802.3ad (Link Aggregation), 802.1p (Priority Encoding), 802.3x (Flow Control), 802.1Qaz, 802.1Qau (Congestion Notification)
- OS support for Linux and Windows
- RoHS compliant

### Benefits of Choosing VadaTech

- Dual 10GbE iSCSI offload engine
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company

The AMC234 is a single module, mid-size AdvancedMC™ (AMC) based on the AMC.1 specification (full-size option available). The AMC234 provides dual 10 Gigabit Ethernet via front panel SFP+.

The AMC234 supports high bandwidth converged storage (SAN) and network traffic and supports line-rate. The module also provides simultaneous TCP/IP and iSCSI.

*VadaTech can modify this product to meet special customer requirements. Contact us to discuss your application.*

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and  $\mu$ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

## BLOCK DIAGRAM

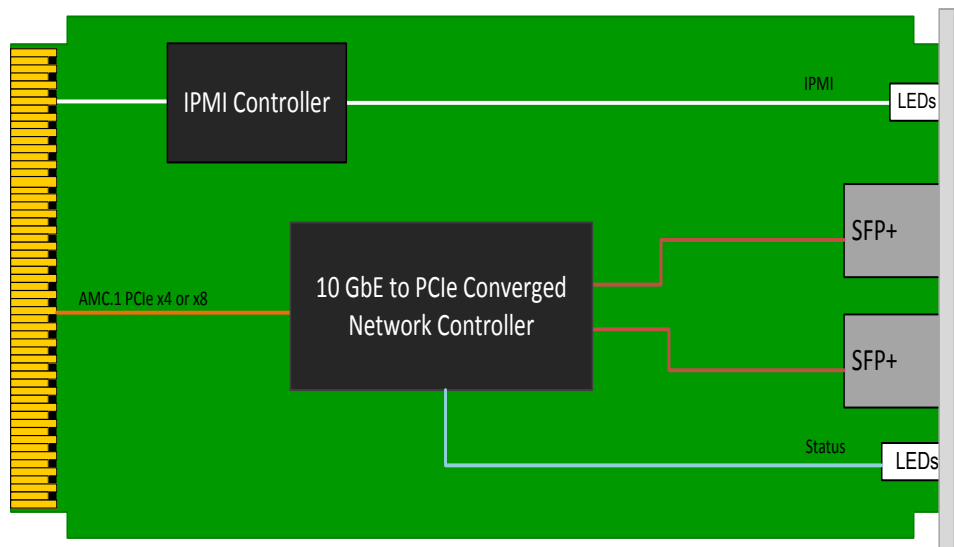


Figure 1: Block Diagram



Figure 2: Front Panel

## SPECIFICATIONS

Architecture		
Physical	Dimensions	Single module, mid-size (full-size options available)
		Width: 2.89" (73.5 mm)
		Depth: 7.11" (180.6 mm)
Type	AMC Serial	Dual port 10 GbE
Standards		
AMC	Type	AMC.1
Module Management	IPMI	IPMI Version 2.0
Configuration		
PCIe	Lanes	4x or 8x
	Generation	Gen 2 (each lane at 5.0 Gb/s)
		Gen 3 (each lane at 8.0 Gb/s)
Power	AMC234	10 W
Environmental	Temperature	Operating temperature: –5° to 55° C (air flow requirement of >200 LFM, industrial versions also available (See <a href="#">environmental spec sheet</a> )
		Storage temperature: –40° to +85° C
	Vibration	Operating 9.8 m/s <sup>2</sup> (1G), 5 to 500 Hz
Front Panel	Shock	30Gs on each axis
	Relative Humidity	5 to 95 percent, non-condensing
	LEDs	IPMI management control
Software Support	Interface Connectors	Status
		Dual SFP+, Management RS-232
		Hot swap ejector handle
Other	Operating System	Linux and Windows
MTFB	MIL Handbook 217-F@TBD Hrs	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Compliance	PICMG 3.0 Rev 3.0, RoHS 2 and NEBS Level 3.	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	
Trademarks and Disclaimer	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice	

## ORDERING OPTIONS

### AMC234 – ABC – 000 – 0HJ

**A = PCIe**

1 = x4 (Gen3 only)

2 = x8 (Gen2 only)

**B = SFP+ Transceivers**

0 = None

1 = 10GBASE-SR

2 = Reserved

3 = 10GBASE-LR

**C = Front Panel Size**

1 = Reserved

2 = Mid-size

3 = Full-size

**H = Operating Temperature**

0 = Commercial (-5° to +55° C)

1 = Industrial (-20° to +70° C)

2 = Military (-40° to +80° C)\*

**J = Conformal Coating**

0 = None

1 = Humiseal 1A33 Polyurethane

2 = Humiseal 1B31 Acrylic

\*Edge of module for conduction-cooled boards

## RELATED PRODUCTS



**VT841 1U**  
Chassis Platform



**UTC004 Gen 3**  
MCH



**UTC020 1000W**  
Power Module

## CONTACT US

**VadaTech Corporate Office**

198 N. Gibson Rd.  
Henderson, NV 89014  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +1 702 896-3337  
Fax: +1 702 896-0332

**Asia Pacific Sales Office**

7 Floor, No. 2, Wenhui Street, Neihu District,  
Taipei 114, Taiwan  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +886-2-2627-7655  
Fax: +886-2-2627-7792

**VadaTech European Sales Office**

Ocean Village Innovation Centre, Ocean Way,  
Ocean Village, Southampton, SO14 3JZ  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +44 2380 381982  
Fax: +44 2380 381983