

AMC236



KEY FEATURES

- AMC.1
- Single-width, full-height
- 8 Gigabit Ethernet ports via SFP
- PCIe Gen2 x4 or x8 lanes to Ports 4-11
- IPMI 2.0 compliant
- RoHS compliant
- OS support for:
 - Linux
 - Windows
 - Solaris
 - VxWorks

The AMC236 is a 8 port Gigabit Ethernet (GbE) AdvancedMC™ (AMC) module via SFP connectors. VadaTech offers this product in a full-height form factor based on the AMC.1 specification.

This modules allows for mix of Fiber and/or copper transceiver.

The AMC236 is based on the latest Intel® Gigabit Ethernet controller (82580 chip).

VadaTech can modify this product to meet special customer requirements without NRE (minimum order placement is required).

AdvancedMC™

AMC 8 Port Gigabit Ethernet via SFP

SPECIFICATIONS

Architecture		
Physical	Dimensions	Single-Width, Mid-Height (Full-Height option)
		Width: 2.89 in. (73.5 mm)
		Depth: 7.11 in. (180.6 mm)
Type	AMC GbE	8 port Gigabit Ethernet
		10/100/1000 Mbps operation - Copper or Fiber (SX or LX)
		IP, TCP, and UDP checksum offload capabilities, Stateless offloads (Header split, RSS)
		UDP/TCP transmit segmentation Offload (TSO), SCTP receive and transmit checksum offload
Standards		
AMC	Type	AMC.1
Module Management	IPMI	IPMI Version 2.0
PCIe	Lanes	Gen2 x4 or x8
Configuration		
Power	AMC236	10W Max
Environmental	Temperature	Operating Temperature: 0° to 65° C (Air flow requirement is to be greater than 200 LFM)
		Storage Temperature: -40° to +90° C
	Vibration	1G, 5-500Hz each axis
	Shock	30Gs each axis
Front Panel	Relative Humidity	5 to 95 percent, non-condensing
	Interface Connectors	Quad SFP connector
	LEDs	IPMI Management Control
		Activity and Link, PCIe Lane Good
Mechanical	Hot Swap Ejector Handle	
Software Support	Operating Systems	Linux, Windows, Solaris and VxWorks
Other		
MTBF	MIL Handbook 217-F >TBD	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Compliance	RoHS and NEBS	
Warranty	Two (2) years	
Trademarks and Logos	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedMC™ and the AdvancedTCA™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.	

AMC 8 Port Gigabit Ethernet via SFP

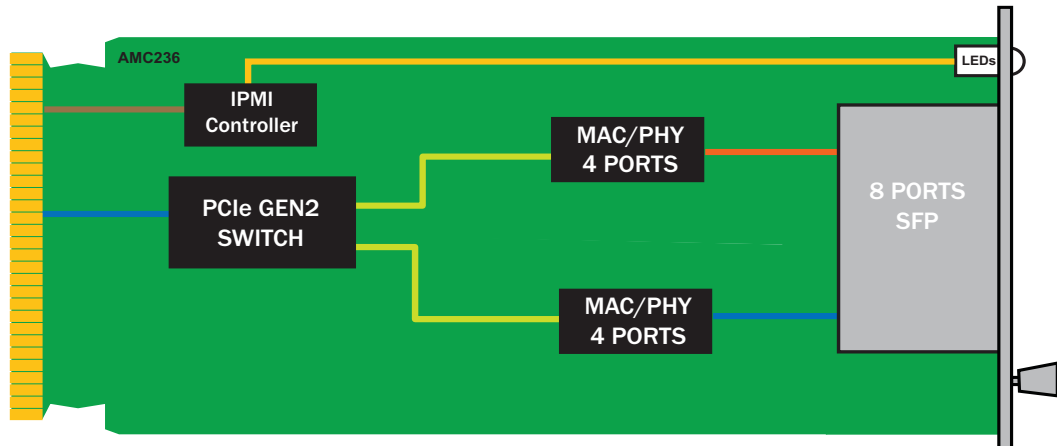


FIGURE 1. AMC236 Functional Block Diagram

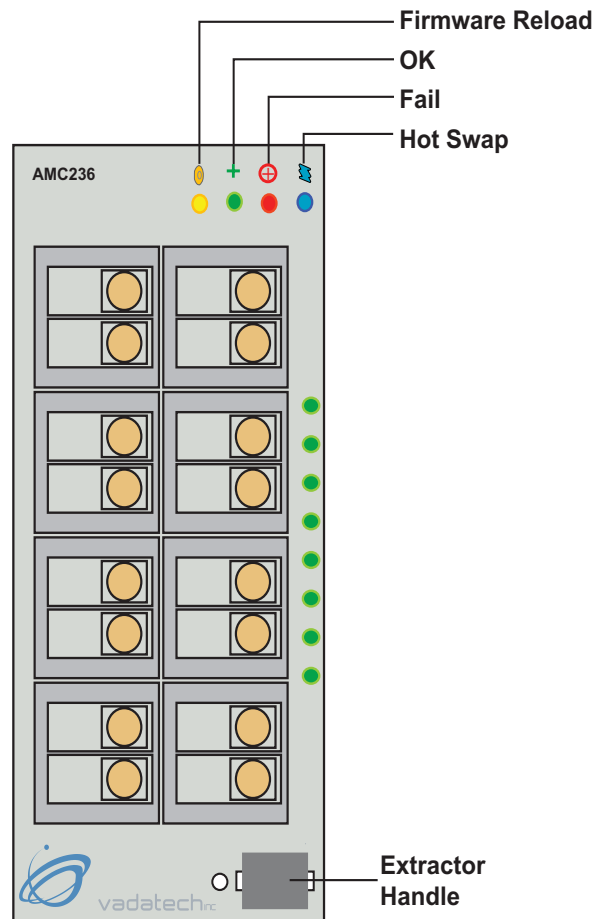


FIGURE 2. AMC236 Front Panel

ORDERING OPTIONS

AMC236 - AOC - DEF- OHJ

A = Interface

- 0 = PCIe Gen2 x4 (ports 4-7)
- 1 = PCIe Gen2 x8 (ports 4-11)

C = Front Panel Height

- 1 = Reserved
- 2 = Reserved
- 3 = Full-Height

D = Number of Fiber SX Transceivers

- 0 = None
- X = Number of Transceivers

E = Number of Fiber LX Transceivers

- 0 = None
- X = Number of Transceivers

F = Number of Copper Transceivers

- 0 = None
- X = Number of Transceivers

H = Operating Temp

- 0 = Commercial (0° to +65°)
- 1 = Industrial (-20° to +70°)
- 2 = Military (-40° to +80°)

J = Conformal Coating

- 0 = None
- 1 = Humiseal 1A33 Polyurethane
- 2 = Humiseal 1B31 Acrylic

