

AMC323

Eight Port RS-422/485 Serial Adapter AMC



AMC323

Key Features

- Eight RS-422/485 serial ports using a high density connector
- x1 PCIe lane to Port 4 or Port 8, AMC.1 compliant
- Single module, compact-size (mid-size and full-size options available)
- Optional adapter cable to convert the high density connector to standard DB-9 connector, one per port
- IPMI 2.0 compliant
- RoHS compliant

Benefits

- High density connector for access to eight ports
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

AdvancedMC™




vadatech
THE POWER OF VISION



AMC323

The AMC323 provides eight ports of RS-422/RS-485 with hardware handshake (RX, TX, RTS, CTS) in a single module, compact-size AdvancedMC (AMC) form factor. All eight ports are available through the front panel with a high-density connector. VadaTech offers a breakout adapter cable to convert this high-density connector to multiple standard DB-9 connectors. For a different front panel I/O connector, contact Sales

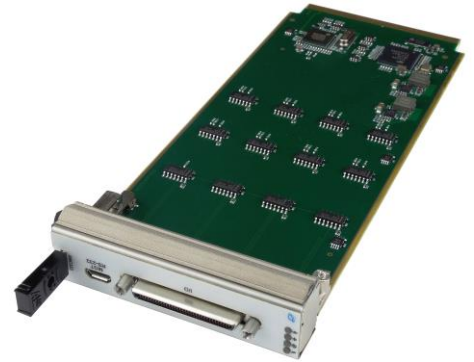

Block Diagram

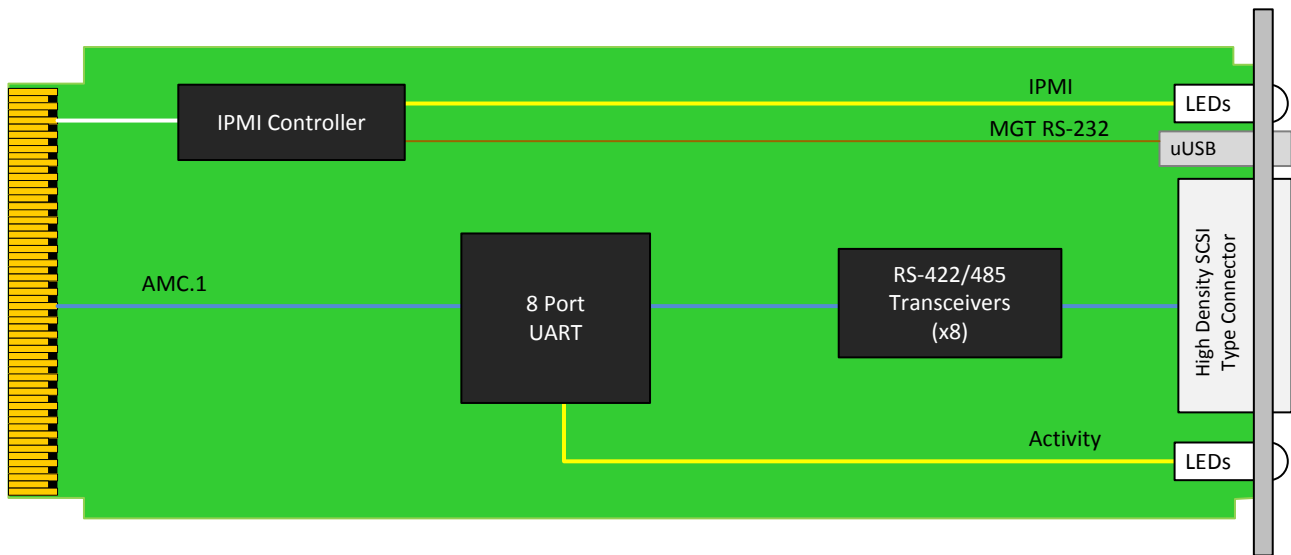


Figure 1: Functional Block Diagram

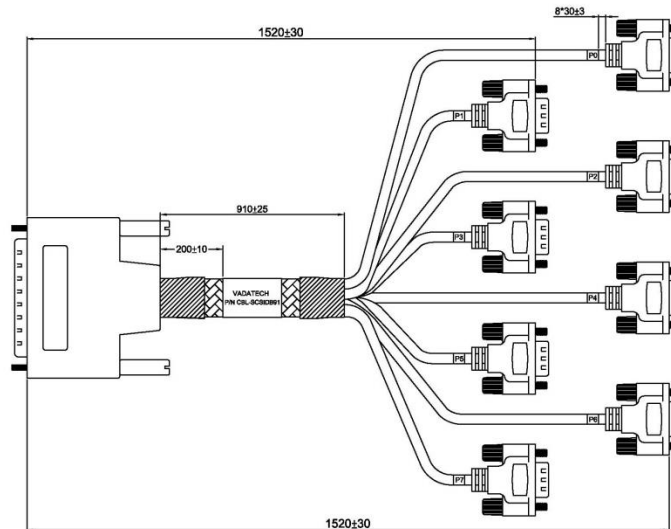


Figure 2: Optional Adapter Cable

Specifications

Architecture		
Physical	Dimensions	Single module, compact-size (mid and full-size optional)
		Width: 2.89" (73.5 mm)
		Depth 7.11" (180.6 mm)
Type	AMC Serial	RS-422/485
		8 Ports with Full hardware handshake (RX, TX, RTS, CTS)
Standards		
AMC	Type	AMC.0 and AMC.1
Module Management	IPMI	IPMI version 2.0
PCIe	Lanes	x1
Configuration		
Power	AMC323	3W
Environmental	Temperature	Operating temperature: -5° to 45° C (55°C for limited time, performance restrictions may apply), industrial and extended versions also available (See environmental spec sheet)
		Storage Temperature: -40° to +85°C
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500Hz on each axis
	Shock	Operating 30G on each axis
	Relative Humidity	5 to 95 per cent, non-condensing
Front Panel	Interface Connectors	Micro 68-pin SCSI to (8) DB9 Male connector via adapter cable
	LEDs	IPMI management control and activity
	Mechanical	Hot swap ejector handle
Software Support	Operating System	Linux and Windows
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

Ordering Options

AMC323 – ABC-000-00J

A = Front Panel Interface		
1 = With Adapter Cable 2 = Without Adapter Cable		
B = PCIe Routing		
0 = Port 4 1 = Port 8		
C = Front Panel		J = Temperature Range and Coating
1 = Compact-size 2 = Mid-size 3 = Full-size 4 = Compact-size, MTCA.1 (captive screw) 5 = Mid-size, MTCA.1 (captive screw) 6 = Full-size, MTCA.1 (captive screw)		0 = Commercial (–5° to +55° C), no coating 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70° C), no coating 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic 6 = Military (–40° to +85° C), Humiseal 1A33 Polyurethane* 7 = Military (–40° to +85° C), Humiseal 1B31 Acrylic*

* Conduction cooled, temperature is at edge of module. Consult factory for availability

Related Products

UTC004



- Single module, full size per AMC.0
- Unified 1GHz quad-core CPU for MCMC (MicroTCA Carrier Management Controller), Shelf Manager, Clocking, and Fabric management
- Automatic fail-over with redundant UTC004s

AMC720



- Intel® Xeon™ E3 processor
- Conduction cooled version available
- Single module, mid-size per AMC.0

UTC010



- Dual -36 to -75 VDC input,
- 792W (available in 396W)
- Hot swappable with support for power module redundancy

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2017 VadaTech Incorporated, All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 3.0 – SEP/17