

AMC994 - 8 LVDS Expansion Module via RJ-45, 8 Tx/Rx Pairs



KEY FEATURES

- 8 LVDS pairs
- Any of the pairs could be configured as transmit or receive
- Ports 12-15 or 17-20 (as LVDS)
- Ports are routed to two RJ-45
- Single-module mid-size (option for full-size)


Benefits of Choosing VadaTech

- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company


The AMC994 routes 8 LVDS Transmit/Receive lines from AMC ports 12-15 or 17-20 to the front via dual RJ-45 connectors. Each of the individual pairs could be configured as input or output. The module allows expansion via the front panel to other modules.

The module follows AMC.0 specification.

BLOCK DIAGRAM

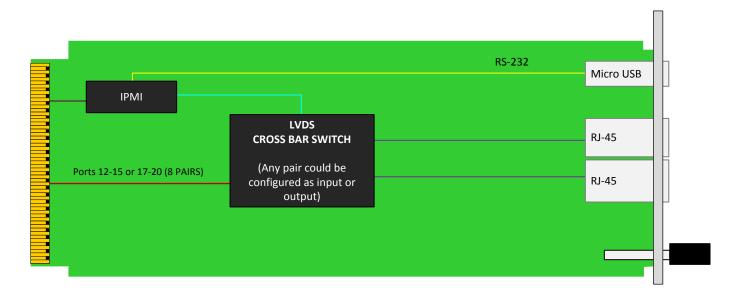

FRONT PANEL



AMC994 – LVDS Expansion Module via RJ-45, 8 Tx/Rx Pairs

SPECIFICATIONS

Architecture			
Physical	Dimensions	Single module, mid-size (full-size option available)	
		Width: 2.89" (73.5 mm)	
		Depth: 7.11" (180.6 mm)	
Туре	AMC LVDS	8 Pairs of LVDS which can be configured individually as input or output	
Configuration			
Power	AMC994	2 W	
Environmental	Temperature	Operating temperature: –5° to +55° C (industrial versions also available (See environmental spec sheet)	
		Storage temperature: –40° to +85° C	
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500 Hz	
	Shock	30Gs on each axis	
	Relative Humidity	5 to 95 percent, non-condensing	
Front Panel	Interface Connectors	8 LVDS via two RJ-45	
		MGT RS-232 via micro USB	
	Mechanical	Hot swap ejector handle	
Software Support	Operating System	Not applicable	
Other			
MTBF	MIL Handbook 217-F@TBD Hrs		
Certifications	Designed to meet FCC, CE and UL certifications where applicable		
Compliance	PICMG 3.0 Rev 3.0, Rol	PICMG 3.0 Rev 3.0, RoHS 2 and NEBS Level 3.	
Standards	VadaTech is certified to be	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	Two (2) years	
	·		

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.



ORDERING OPTIONS

AMC994 - A0C - 000 - 00J

A = Ports

0 = 17-20

1 = 12-15

C = Front Panel Size

1 = Reserved

2 = Mid-size

3 = Full-size

*Edge of module for conduction-cooled boards

J = Temperature Range and Coating

0 = Commercial, No coating

1 = Commercial, Humiseal 1A33 Polyurethane

2 = Commercial, Humiseal 1B31 Acrylic

3 = Industrial, No coating

4 = Industrial, Humiseal 1A33 Polyurethane

5 = Industrial, Humiseal 1B31 Acrylic

6 = Military, Humiseal 1A33 Polyurethane*

7 = Military, Humiseal 1B31 Acrylic*

RELATED PRODUCTS



AMC592 FPGA Carrier for FMC, Kintex UltraScale



AMC527
FPGA Carrier for FMCs, Virtex-7



VT815 9U μTCA.0/ μTCA.4 Chassis, 12 AMCs

CONTACT US

VadaTech Corporate Office

198 N. Gibson Rd. Henderson, NV 89014

Email: <u>info@vadatech.com</u> Telephone: +1 702 896-3337 Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhu Street, Neihu District, Taipei 114, Taiwan

Email: <u>info@vadatech.com</u> Telephone: +886-2-2627-7655 Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR Email: <u>info@vadatech.com</u>

Telephone: +44 2380 016403

