

# FMC254

FMC+ Quad ADC 12-bit @ 1.6  
GSPS



FMC254

## Key Features

- Quad ADC12SJ1600 ADC 12-bit at 1.6GSPS
- Full-Power input bandwidth: 6GHz
- 4 JESD204C lanes from each ADC
- FPGA Mezzanine Card (FMC+) per VITA 57.4
- Excellent dynamic performance
- Front panel interface includes CLK In and Trig In

## Benefits

- Ideal for Frequency Modulated Continuous Wave (FMCW) LiDAR systems
- Compatible with a broad range of Xilinx and Altera based FMC carriers from VadaTech and others
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



**vadatech**  
THE POWER OF VISION



# FMC254

The FMC254 is an FPGA Mezzanine Card (FMC+) per VITA 57.4 specification. The board has quad TI ADC12SJ1600 which provides 12-bit resolution at 1.6 GSPS. This ADC is ideal for light detection and ranging (LiDAR) systems. The full-power input bandwidth also enables direct RF sampling of L-band and S-band.

The FMC254 provides four single ADC to allow interleaving among the four ADC. This is accomplished by skewing the sampling clock property among the four ADC.

The four analog input, clock and trigger interfaces of the FMC254 are routed via SSMC connectors. The internal clock frequency is programmable and the clock is capable of locking to an external reference.

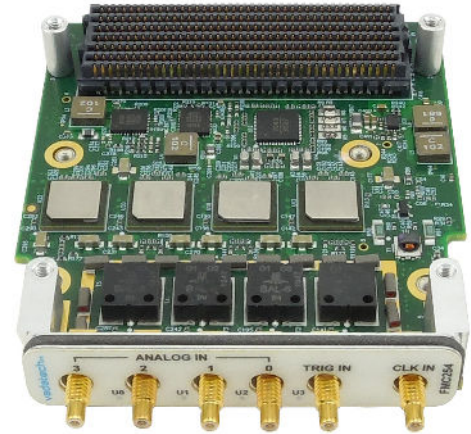


Figure 1: FMC254

## Block Diagram

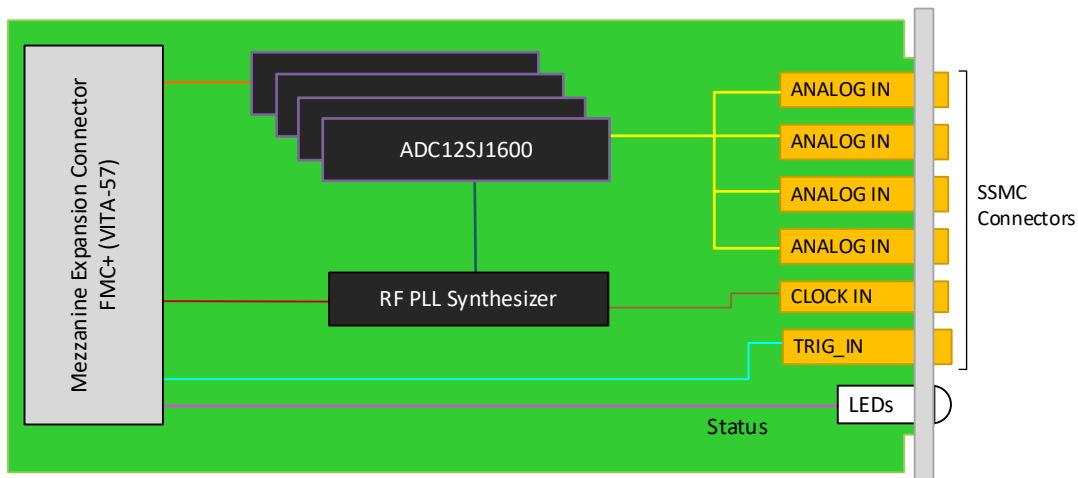


Figure 2: FMC254 Block Diagram

## Front Panel



Figure 3: FMC254 Front Panel

# Specifications

Architecture		
Physical	Dimensions	Width: 2.71" (69 mm)
		Depth: 3.70" (94 mm)
Type	FMC+	Quad ADC
Standards		
FMC	VITA-57	ANSI/VITA 57.4
Configuration		
Power	FMC254	~6 W
Environmental	Temperature	Operating temperature: -5° to 55° C, industrial and extended versions also available (See <a href="#">environmental spec sheet</a> )
		Storage Temperature: -40° to +90°C
	Vibration	1G, 5 to 500 Hz on each axis
	Shock	30Gs on each axis
	Relative Humidity	5 to 95 per cent, non-condensing
Front Panel	Interface Connectors	6x SSMC
		LEDs Status and user defined (total 5)
Software Support	Operating System	Agnostic
Conformal Coating		Humiseal 1A33 Polyurethane (Optional)
		Humiseal 1B31 Acrylic (Optional)
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty		Two (2) years

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA, VPX and µTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

### Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

# Ordering Options

## FMC254 – 000-000-G0J

		G = FMC Board Spacing
		0 = 10 mm (per VITA-57 specification) 1 = 17.5 mm *
		J = Temperature Range and Coating**
		0 = Commercial (–5° to +55° C), No coating 1 = Commercial (–5° to +55° C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55° C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70° C), No coating 4 = Industrial (–20° to +70° C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70° C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85° C), Humiseal 1A33 Polyurethane 7 = Extended (–40° to +85° C), Humiseal 1B31 Acrylic

\* For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC

\*\* Edge of module for conduction cooled boards, consult factory for availability

## Related Products

AMC595



- Xilinx Ultra Scale XCVU440 w/ QorIQ PPC2040
- 8 GB of DDR-4 (single bank of 64-bits)
- FMC support (with special connector)

FMC229



- Quad DAC 16-Bit @ 2.8 GSPS With Quadrature Modulator
- Single DAC39J84
- On board dual Wideband Quadrature Modulator

FMC220



- Analog Devices AD9234 dual 1 GSPS ADC
- The Analog inputs for the ADC are DC coupled
- Analog Devices AD9162/9164 6 GSPS RF DAC  
Supported by DAQ Series™ data acquisition software

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

[info@vadatech.com](mailto:info@vadatech.com) | [www.vadatech.com](http://www.vadatech.com)

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2017 VadaTech Incorporated, All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 1.1 – JUN/21

