


FMC256

QSFP28, Dual ADC, dual DAC plus
Digital I/O, FMC

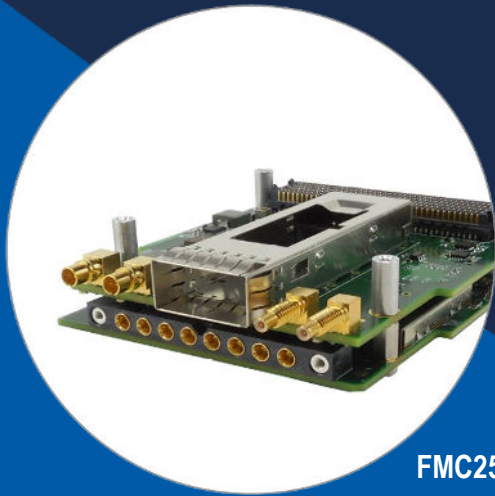

FMC256

Key Features

- Four SERDES to QSFP28 to allow for high-speed multi-protocol communicate via Fiber or Copper
- On board PLL to lock to input clock for synchronization
- Two channels SAR ADC based on LTC2378, 20-bit at one MSPS
- Two channels DAC based on AD5791, 20-bit
- Four digital Output (could be used for Trig In/Out)
- Standard VITA 57.1 FMC

Benefits

- High density, multi-function board
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



FMC256

The FMC256 is an FPGA Mezzanine Card (FMC) per VITA 57.1 standard, offering a small footprint and providing high speed serial communication, ADC, DAC and digital I/O.

Two LTC2378-20 each provide an input channel ADC of 20-bits at 1 MSPS, and two AD5791 each provide an output channel DAC of 20-bits.

Discrete digital I/O comprises 4 outputs.


A QSFP28 connector provides four SERDES organised as two pairs. Each pair is supported by an onboard clock and could run at different speed rate. The modules allow synchronization from clocks coming from the Carrier.

The Module does not follow the VITA57 height constrain. It has an additional Daughter card that mates to the FMC module to allow it to accommodate the ADC/DAC channels. For example, on the AMC FPGA FMC Carriers, it requires a full-height AMC panel to accommodate all the I/Os. The Carrier must have a monolithic panel (the FMC256 does not come with an FMC panel) to cover the FMC256 I/O envelope



Figure 1: FMC256

Block Diagram

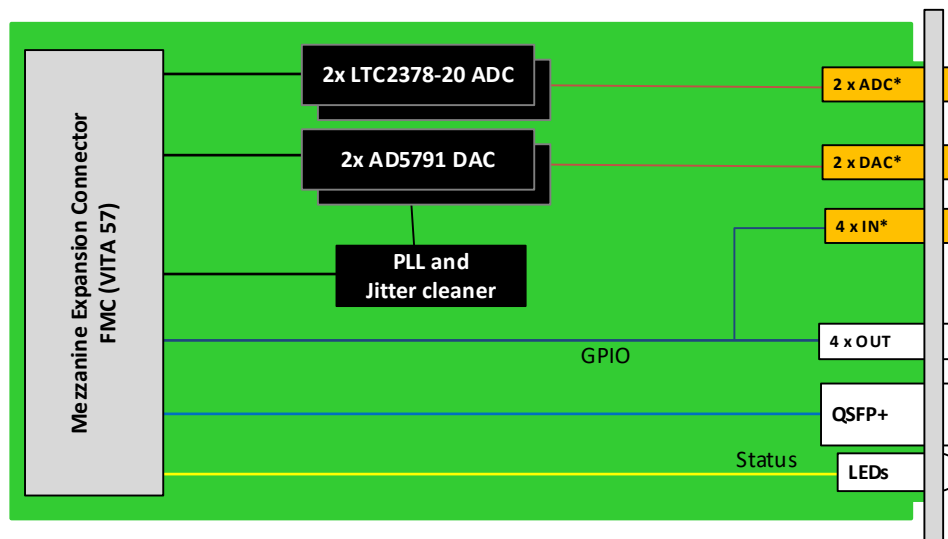

*I/O is via high density RF connector

Figure 2: FMC256 Functional Block Diagram

Specifications

Architecture		
Physical	Dimensions	Single Module
		Width: 2.71" (69 mm)
		Depth: 3.01" (76.5 mm)
Type	FMC	ADC/DAC and High-speed serial (SERDES)
Standards		
FMC	Type	ANSI/VITA 57.1
Configuration		
Power	FMC256	TBD
Environmental	Temperature	See Ordering Options
		Storage Temperature: -40° to +85°C
	Altitude	TBD
	Vibration	Operating 9.8 m/s ² (1G), 5 to 500 Hz on each axis
	Shock	Operating 30Gs each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	High Density RF I/O Connector, QSFP28, SSMC and Twinax
		LEDs Status
Software Support	Operating System	Agnostic
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

FMC256 – A00-000-00J

A = QSFP+ Transceiver		
0 = None 1 = QSFP+ SR-4 150M 2 = QSFP+ SR-4 300M 3 = QSFP+ SR SWDM4 100m 4 = QSFP+ SR SWDM4 300m 5 = QSFP+ LR4 CWDM 1KM 6 = QSFP+ LR4 CWDM 10KM 7 = Reserved		
		J = Temperature Range and Coating
		0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane** 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic**

Notes:

Related Products

AMC592




- AMC FPGA carrier for FMC per VITA 57
- Xilinx UltraScale™ XCKU115 FPGA
- Supported by DAQ Series™ data acquisition software

FMC155



- Multiple I/O in single FMC from-factor
- LVDS, RS-422, and singled-ended +3.3V
- 16x LVDS input/outputs with speed up to 350 MHz and programmable crossbar circuit routing

VPX592



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2019 VadaTech Incorporated. All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 1.3 – MAR/21



vadatech
THE POWER OF VISION