

VPX752

Intel® Xeon™ SoC, PCIe Gen3 and
10GbE (XAUI), 6U VPX



VPX752

Key Features

- 6U VPX module Intel 5th Generation Xeon-D SoC
- PCIe Gen3 x16 (dual x8 or quad x4)
- Quad 10GbE XAUI
- Front-panel video out via DP with dual USB 3.0
- Dual front panel 100/1000/10G Ports
- Single XMC site with I/O expansion going to P5/P6
- Dual isolated RS-422/485 and a single RS-232 port
- Health Management through dedicated Processor

Benefits

- High-density low-power System-on-Chip (SoC)
- Integrated Platform Controller Hub (PCH)
- 32 GB DDR4 with Error Correction Code (ECC) for enhanced reliability, availability and serviceability
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

OpenVPX™



vadatech
THE POWER OF VISION



VPX752

The VPX752 is a processor module (VITA 46) for general purpose processing in demanding applications. Based on the Intel 5th generation Xeon-D processor, the efficient SoC design has low power consumption and integrated PCH technology.

The module provides quad 10GbE XAU1 on P1 and PCIe Gen3 x16 (dual x8 or quad x4) on P2, together with quad GbE to P4. The GbE is software programmable on each port to run as 1000Base-TX or 1000Base-BX. It also provides Dual 100/1000/10G to the front panel, together with video out and dual USB 3.0 which can be used to implement a user interface for ease of maintenance.

The VPX752 provides 32 GB of DDR4 memory with ECC and Flash for the OS. The BIOS allows booting from onboard Flash, offboard SATA, PXE boot and USB. The module has a single XMC slot for additional I/O. The XMC I/O is routed to P5/P6.

The VPX752 has dual isolated RS-422/485 in addition to the single RS-232.

Linux OS is standard on the VPX752, consult VadaTech for other options.

The unit is available in a range of temperature and shock/vib specifications per ANSI/VITA 47, up to V3 and OS2.



Figure 1: VPX752

Block Diagram

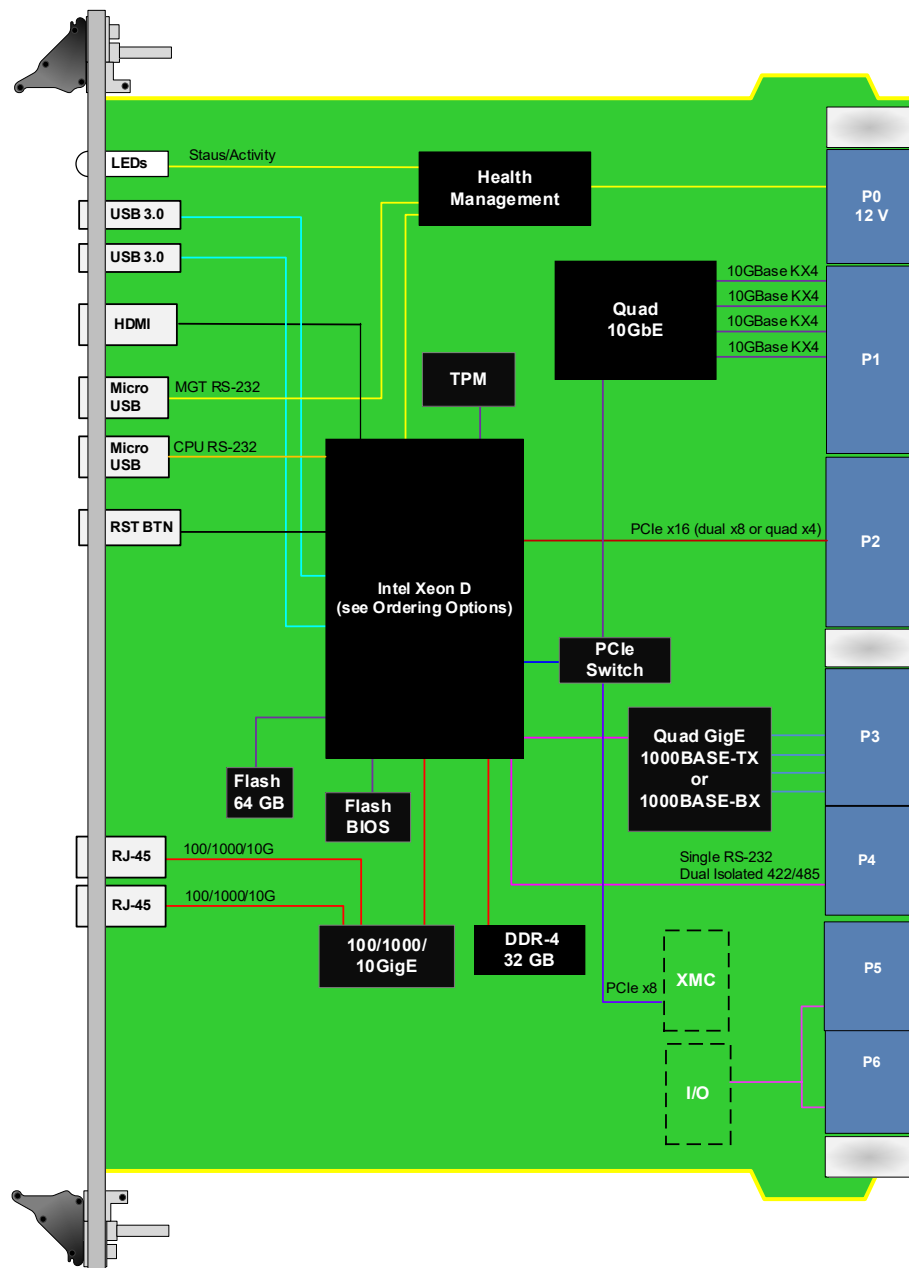


Figure 2: VPX752 Functional Block Diagram

Front Panel



Figure 3: VPX752 Front Panel

Pinout Block Diagram

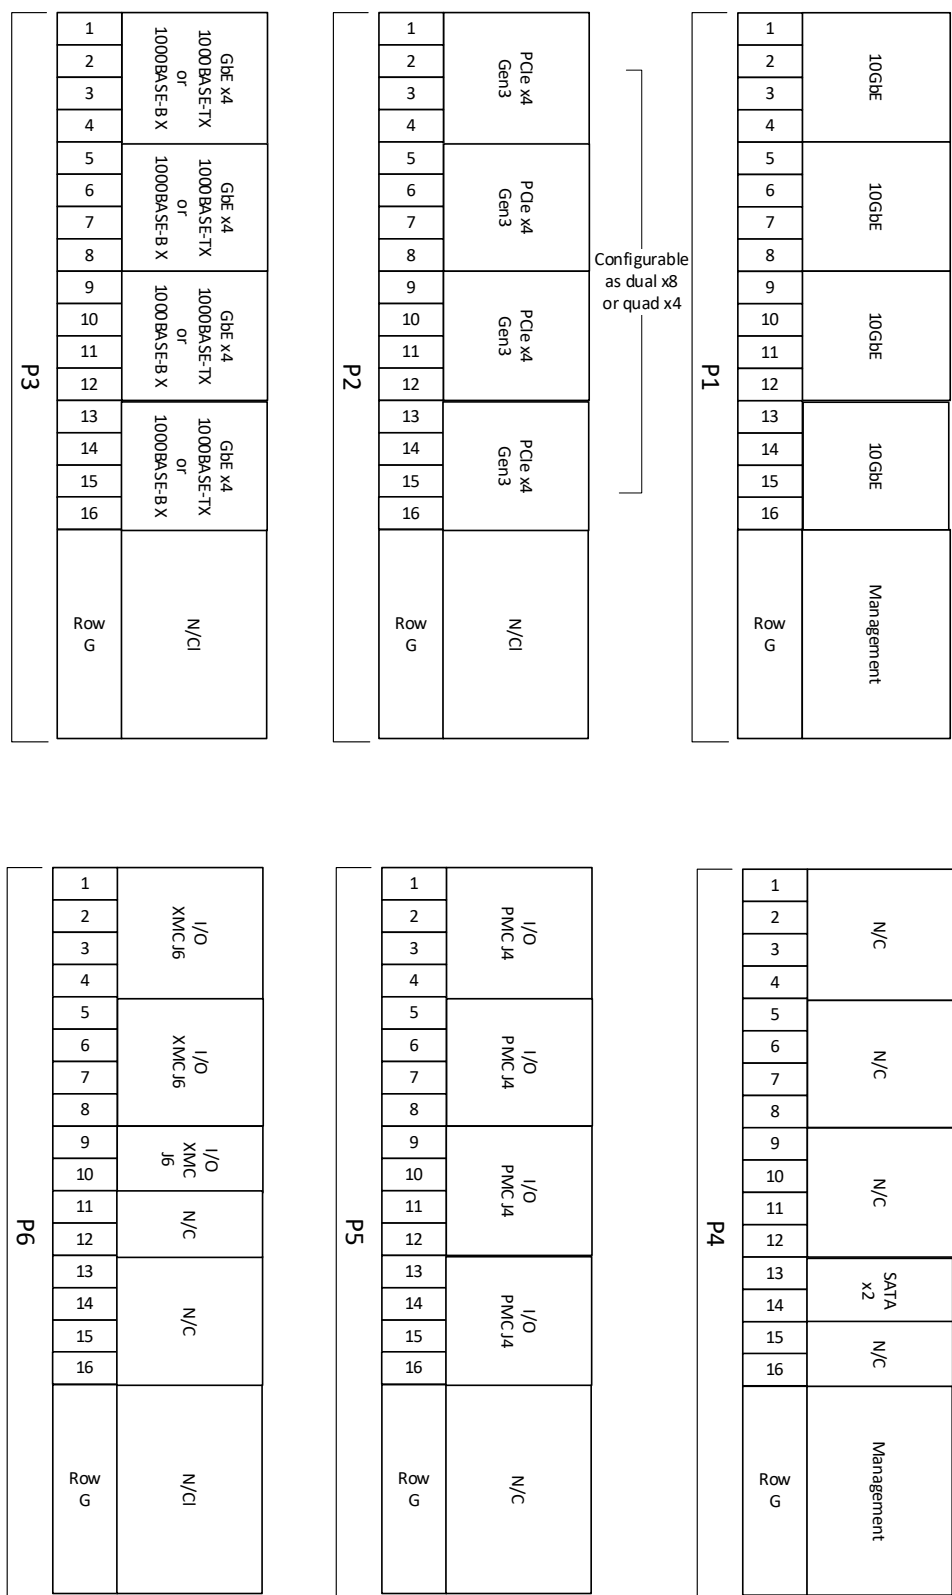


Figure 4: VPX752 Pinout Block Diagram

Specifications

Architecture		
Physical	Dimensions	6U, 1" pitch
Configuration		
Power	VPX752	85W (fastest CPU)
Processor	CPU	Intel 5th Generation Xeon D-1513N, D-1539, D-1548 or D-1577
	Memory	DDR4 32 GB with ECC, Flash
PCIe	Lanes	Gen3 x16 (dual x8 or quad x4)
PCH		Integrated
	Memory	BIOS flash
Front Panel	10GbE	Dual 100/1000/10GbE via x 2 RJ-45
	Video	1x DP (Display Port)
	Serial	CPU RS-232 via Micro USB
	USB	2x USB 3.0
	Micro USB	RS-232 from FPGA and RS-232 from Health Management
	LEDs	User defined by Health Management
Onboard Interfaces		XMC site
VPX Interfaces	Slot Profiles	See Ordering Options
	Rear IO	4x 10GbE KX4 on P1
		16x PCIe Gen3 (dual x8 or quad x4) on P2
		4x GbE on P3
		RS232/422/485 on P4
	Power Supplies	On P0: VS1 = 12V
Software	OS Support	Linux default, contact Sales for VxWorks and Windows support requirements
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty		Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VPX752 – ABC-0E0-GHJ

A = Processor 0 = 4C, 1.6 GHz, 6 MB LLC, Xeon D-1513N 1 = Reserved 2 = 8C, 2 GHz, 12 MB LLC, Xeon D-1548 3 = 16C, 1.3 GHz, 24 MB LLC, Xeon D-1577 4 = 8C, 1.6 GHz, 12 MB LLC, Xeon D-1539		G = Applicable Slot Profiles 0 = 5 HP, VITA 48.1
B = Trusted Platform Manager (TPM) 0 = No Platform Manager 1 = Platform Manager	E = VPX Connector Type 0 = Standard 50u Gold Rugged 1 = KVPX Connectors	H = Environmental See Environmental Specification
C = XMC Connectors 0 = VITA 42 1 = VITA 61		J = Conformal Coating 0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Environmental Specification

Air Cooled			Conduction Cooled		
Option H	H = 0	H = 1	H = 2	H = 3	H = 4
Operating Temperature	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes:

*Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

Related Products

VPX516



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package
- High-performance clock jitter cleaner

VPX592



- 3U FPGA carrier for FMC per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

VPX599



- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC 12-bit @ 6.4 GSPS
- Dual DAC 16-bit @ 12 GSPS (AD9162 or AD9164)

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 2.9 – JUL/21

