

# VT971

FPGA High speed Digital Signal  
Processing utilizing Xilinx VU13P  
with Integrated Layer 3 Managed  
Switch



VT971

## Key Features

- High speed DSP processing
- Xilinx Ultrascale+ VU13P FPGA
- Quad-core ARM processor at 1.4GHz per core
- Managed Layer 3 GbE/10GbE Switch
- 24xGbE + 2x10GbE Egress Ports
- Triaxial, digital gyroscope
- Rugged conduction cooled module

## Benefits

- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



**vadatech**  
THE POWER OF VISION

**AdvancedMC™**



# VT971

The VT971 is a rugged conduction cooled module which follows the VITA specification for environmental (see ordering options). The module accepts 32 high-speed SERDES to the FPGA, which is supported by two 64-bit wide banks for DDR4 memory for the total of 16GB of memory. The FPGA is integrated with a Layer 3 Managed Gbe/10GbE Ethernet Switch, which provides 26 Egress port via front of the module. The module supports 24 GbE through RJ-45 (10/100/1000Base-T) and dual 10GbE via SFP+.

The VT971 has a quad core ARM processor utilizing four Cortex-A53 cores running at 1.4GHz. The CPU manages the layer three switch and interfaces to the FPGA via PCIe.

The VT971 is ideal for application where the signals are digitized at a remote location and processed at a different site.

The module has a Triaxial, digital gyroscope, which provides digital accelerometer, delta angle, delta velocity, angular random walk, etc.

The module comes only in conduction cool and operates with input power of 10-36V DC.



Figure 1: VT971 Front View

## Chassis Layout



Figure 2: VT971 Multiple Views

## Block Diagram

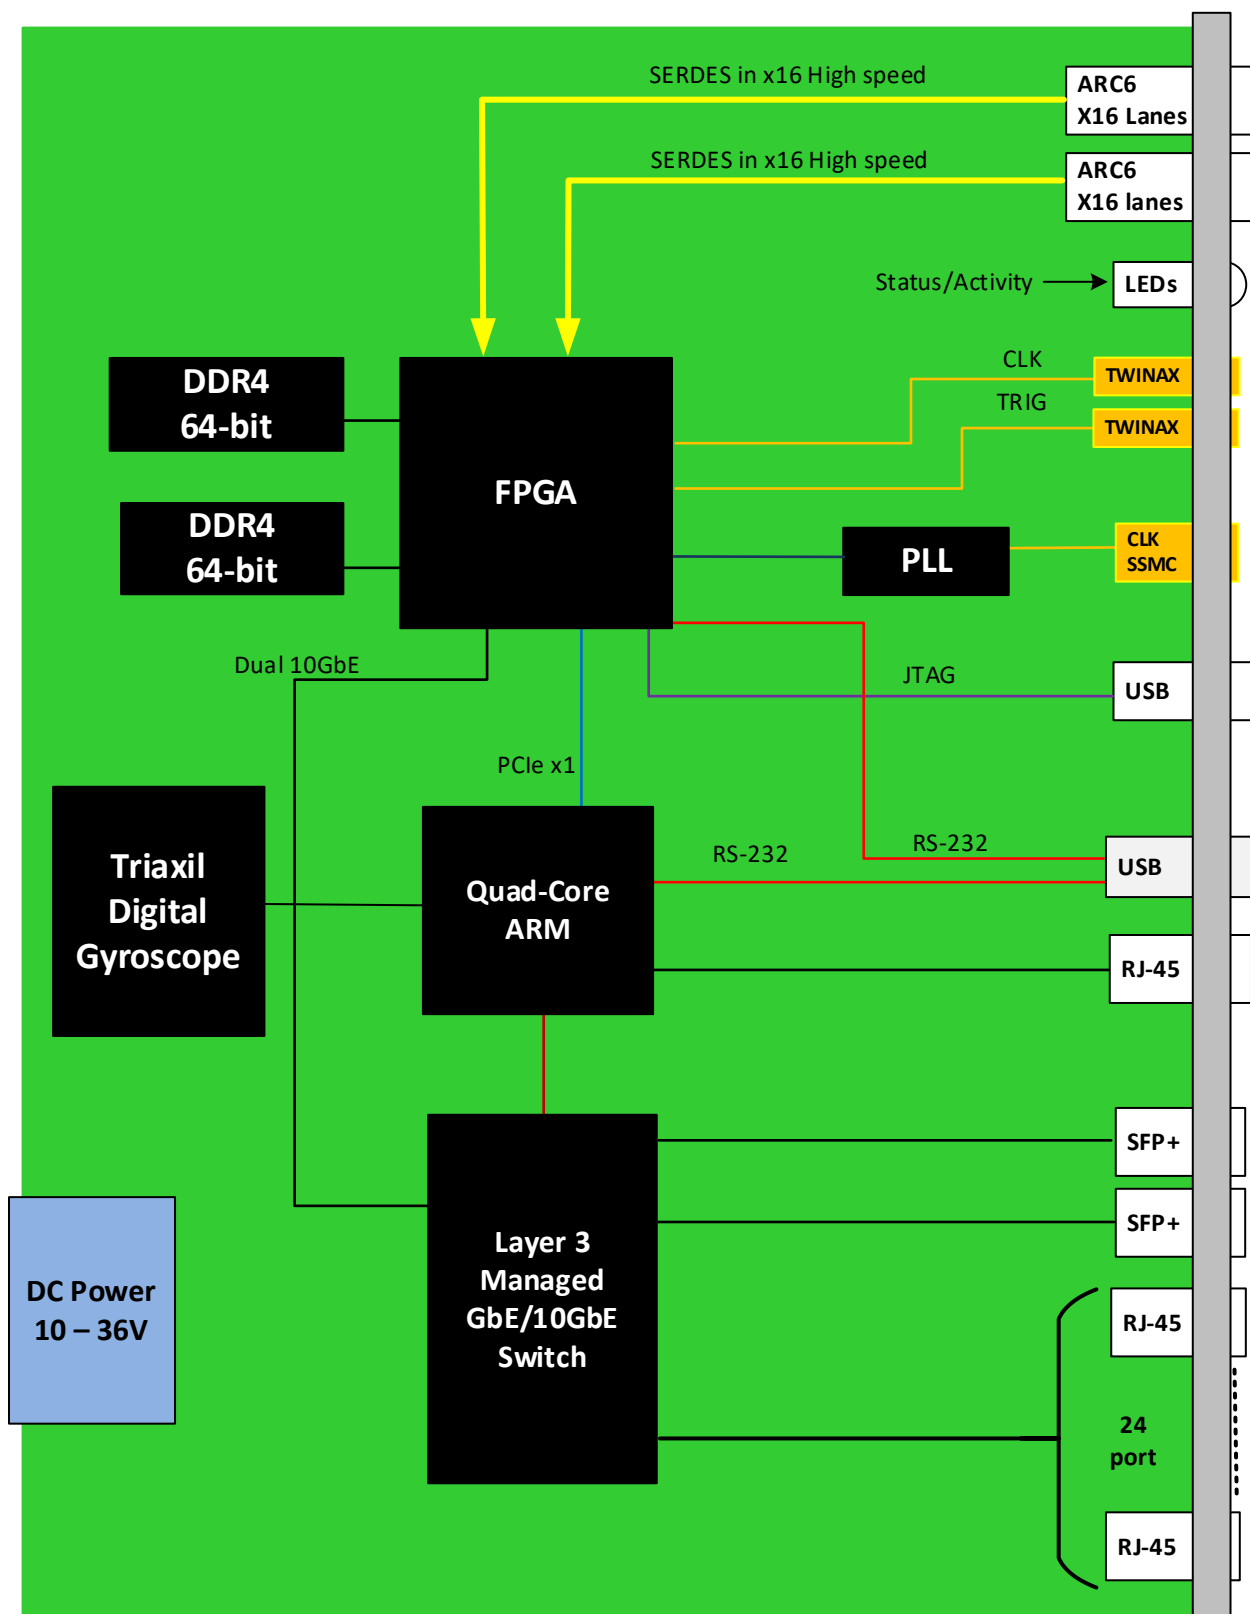


Figure 3: VT971 Functional Block Diagram

# Specifications

<b>Architecture</b>		
<b>Physical</b>	<b>Dimensions</b>	Width: 18.5"
		Depth: 7.5"
		Height: 1.5"
<b>Type</b>	<b>Conduction Cooled</b>	Per VITA Specification for environmental
<b>Configuration</b>		
<b>Power</b>	<b>VT971</b>	90W FPGA dependent load (10-36V DC power input)
<b>Environmental</b>	<b>Temperature</b>	See <a href="#">Ordering Options</a>
		Storage Temperature: -40° to +90°C
	<b>Vibration</b>	Operating 9.8 m/s <sup>2</sup> (1G), 5 to 500 Hz on each axis
	<b>Shock</b>	Operating 325G/2 ms, 160G/1 ms
	<b>Relative Humidity</b>	5 to 95% non-condensing
<b>Front Panel</b>	<b>Interface Connectors</b>	Dual ARC6-16 high-speed serial data
		24x RJ-45 for GbE
		2x SFP+ for 10GbE
		RJ-45 for ARM Mngt port
		2x Twinax for clock/trigger inputs and one SSMC for sine wave clock input to PLL
<b>Software Support</b>	<b>Mechanical</b>	USB for Serial and JTAG
		Custom conduction cool
<b>Other</b>	<b>Operating System</b>	Linux
<b>MTBF</b>	MIL Hand book 217-F@ TBD hrs	
<b>Certifications</b>	Designed to meet FCC, CE and UL certifications, where applicable	
<b>Standards</b>	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
<b>Warranty</b>	One (1) year, see <a href="#">VadaTech Terms and Conditions</a>	

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## VT971 – A00-000-0HJ

<b>A = SFP+ TXCVRs (two)</b>		
0 = No TXCVRs 1 = 10GBASE-SR 2 = 10GBASE-LR (1KM) 3 = 10GBASE-LR (10KM) 4 = Copper 1000Base-TX 5 = Copper 10GBase-T		
		<b>H = Environmental</b>
		See <a href="#">Environmental Specification</a>
		<b>J = Conformal Coating</b>
		0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

## Environmental Specification

			Conduction Cooled		
Option H			H = 2	H = 3	H = 4
Operating Temperature			CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature			C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration			V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration			OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity			95% non-condensing	95% non-condensing	95% non-condensing

### Notes:

\* Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

## Related Products

VT878



- Conduction cooled two-module chassis
- Compact and robust design
- Designed for bulkhead mount in ground or air vehicle

VPX007



- Versatile Layer 2 managed Ethernet switch
- Total of 24 Ports of 10GbE
- Up to eight SFP+ Ports on the front panel

VT988



- 16 ADC for synchronous capture
- Xilinx Virtex-7 XC7VX485T FPGA
- NVidia Jetson TX2 System on Module

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 1.3 – JUN/23



**vadatech**  
THE POWER OF VISION