

# VTX955

## 1U Open VPX Rackmount Chassis, Two 3U Payload Slots with RTM Support



VTX955

### Key Features

- 1U Open VPX Rackmount platform with two 3U VPX payload slots. Compatible with 0.8-inch, 0.85-inch and 1.0-inch modules
- Support for conduction cooled modules
- Support for Rear Transition Modules (RTMs)
- Shelf Manager for health management with Tier two support
- Layer two managed switch with support for IEEE1588V2
- Sophisticated clocking features
- Virtual JTAG capabilities for remote programming and debugging eases FPGA Code development
- Redundant cooling in push/pull side-to-side airflow configuration (front and rear), removable fan tray and air filter

### Benefits

- 500W Universal AC Power Input
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



**vadatech**  
THE POWER OF VISION

**OpenVPX™**



# VTX955

The VTX955 is a 1U Open VPX chassis with two 3U VPX payload slots. It can accept 0.8-inch, 0.85-inch and 1.0-inch pitch modules and is ideal for commercial deployment. The Chassis incorporates a VadaTech third generation shelf manager that provides tier 2 health management. The VTX955 can accept conduction cooled modules in both IEEE1101.1 and VITA 48.1 pitch (support for both 1" and 0.8" pitch) – contact sales for details.

A layer-two GbE switch supports 802.1D Spanning Tree Protocol, 802.1W Rapid Spanning Tree, 802.1s Multiple VLAN Spanning Tree, programmable per-port VLAN configurations, 802.1Q, etc. The switch supports IEEE1588V2 and has two ports to each of the VPX modules and two ports to the front of the chassis via RJ-45.

The module accepts GPS antenna input or other clocking options as input/output to the chassis and generation of any clock frequency to the backplane for the VPX modules clock references.

This VadaTech Product provides unprecedented performance density, see [OpenVPX](#) for more details.

## JTAG Master/JTAG via Ethernet Virtual Probe

The VTX955 provides JTAG Master Capability. Data streams sent out via the chassis JTAG Switch Module (JSM) configure arbitrary JTAG Slave devices on VPX cards. Virtual Probe services are available as an option to provide JTAG via Ethernet for Xilinx FPGAs. This allows for standard development tools such as Xilinx IMPACT/ChipScope to treat the switch/JSM combination as if it were a standard JTAG probe. This approach frees the developer from having to attach JTAG probes directly to the VPX module or JSM which can be difficult when systems are already fully assembled. It also allows for remote debugging across long distances without the need to install additional JTAG equipment on-site.

## Power Supplies

The VTX955 has a 500W AC universal input power supply that provides 100W per slot.

## Cooling and Temperature Sensors

The VTX955 is designed to meet the ANSI/VITA 65 standard. It provides right to left push/pull cooling (18 CFM per payload slot at 0.24 in-H<sub>2</sub>O @ 5000 feet) to the VPX payload and RTM slots. The Chassis has a removable Air Filter at the front.

## Backplane

The backplane provides two 3U VPX payload slots in a star configuration, fully compliant to VITA 46.0 baseline specification, with additional support to the RTMs, compliant to VITA 46.10 and OpenVPX VITA 65. VadaTech is open to modify the backplane to meet customer requirements.



Figure 1: VTX955 Front View



Figure 2: VTX955 Rear View

# Backplane Configuration

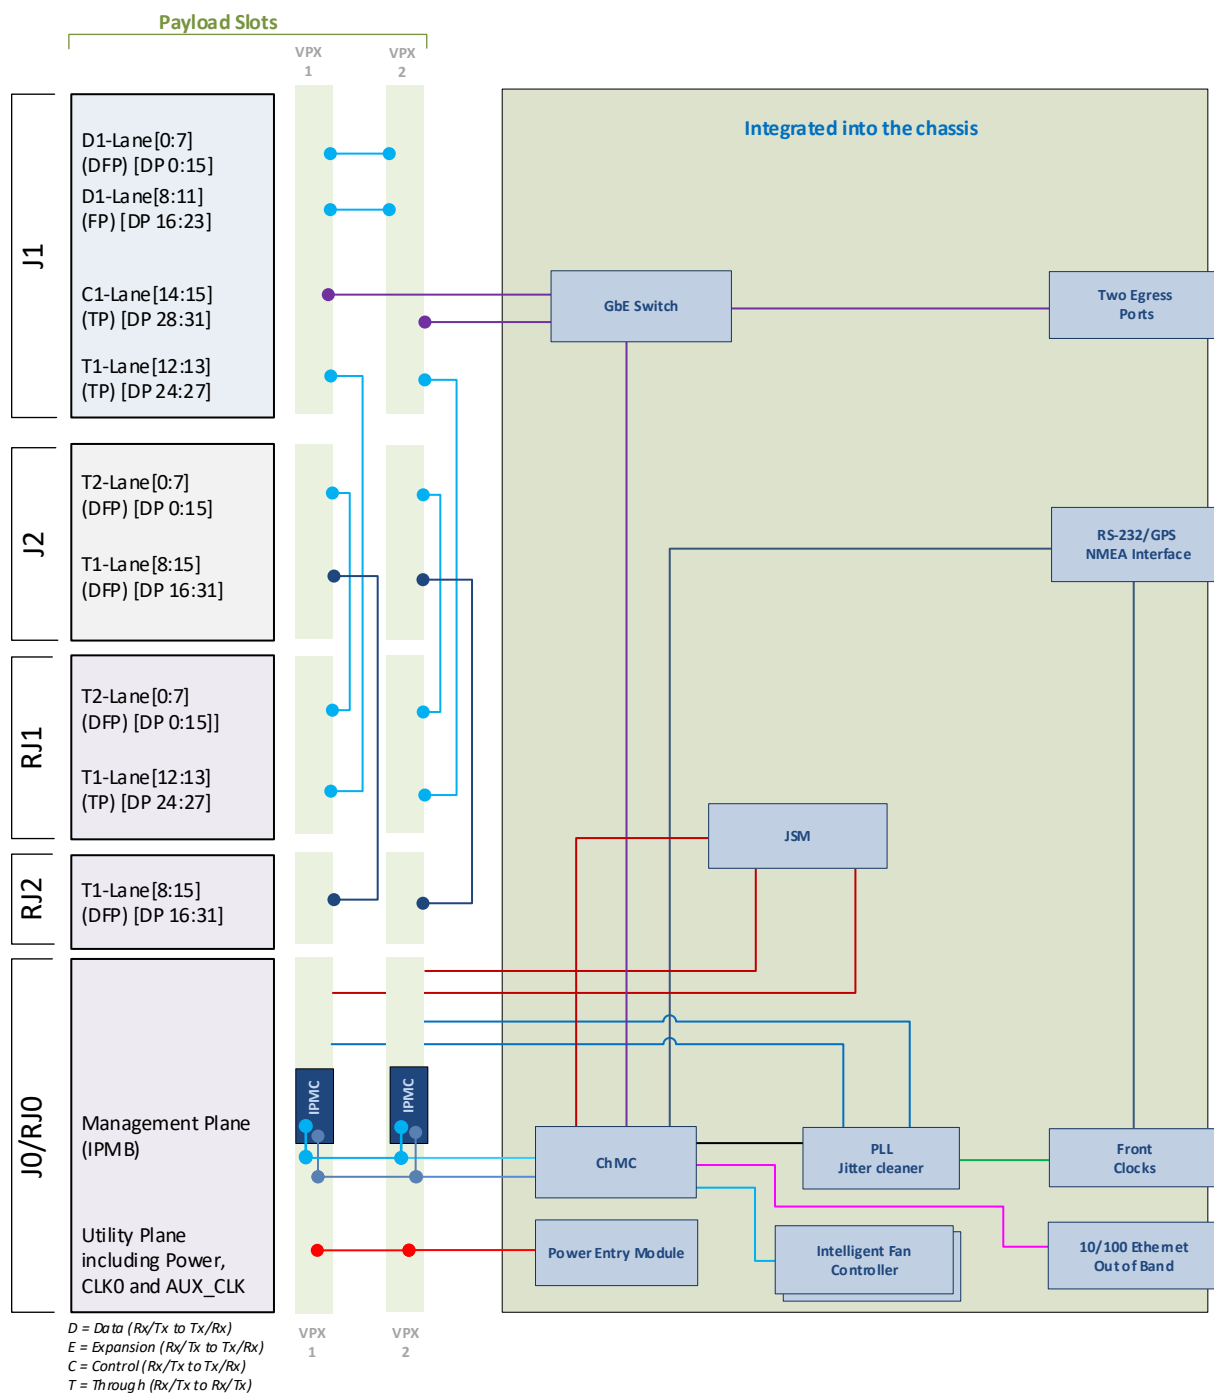


Figure 3: VTX955 Backplane Connections

The initial offering on VTX955 is based on backplane profile BKP3-DIS02\_15.2.2-n. VadaTech can also design additional VITA standard backplane profiles for customer specific applications. Please contact your local sales team for more information.

# Chassis Layout



Figure 4: VTX955 Chassis Layout – Front



Figure 5: VTX955 Chassis Layout - Rear

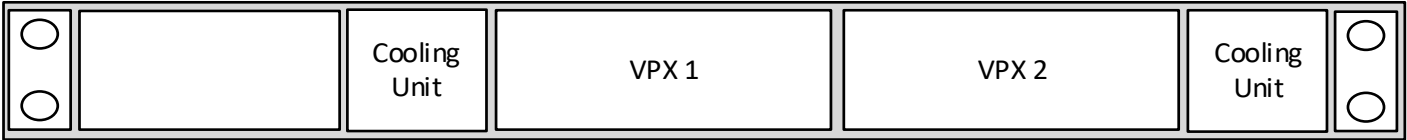


Figure 6: VTX955 Chassis Slots

# Specifications

Architecture		
Physical	Dimensions	Height: 1U
		Width: 19"
		Depth: 12.26"
		Weight: TBD
Type	VPX Shelf	2 Payload Slots up to 1.0" pitch
Standards		
VPX	Type	VITA 46.0 Baseline Specification
Configuration		
Power	VTX955	500W Universal AC input (90-264 Vrms, 47-63 Hz; 360-440 Hz higher leakage)
Environmental		See <a href="#">Ordering Options</a>
		GPS NMEA/RS-232
		Clock in/out
Cooling		Right to left with redundant fan trays for both front and back
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty		One (1) year, see <a href="#">VadaTech Terms and Conditions</a>

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

# Ordering Options

## VTX955 – ABC-DEF-0HJ

A = Module Type Pitch	D = Front Panel Clocking	
0 = Reserved 1 = Reserved 2 = Reserved 3 = Reserved 4 = Convection cooled 1" VITA48.1 pitch	0 = No clocking 1 = Dual LVCMOS Clock In/Out 2 = Sine Wave in + LVCMOS In/Out 3 = Build-in GPS receiver + LVCMOS In/Out 4 = Dual Sine Wave in 5 = GPS receiver + Sine Wave in 6 = Sine Wave In (up to 17dBm) +TTL/LVCMOS In	
B = VPX Connector Type	E = Clock Holdover Stability	H = Environmental
0 = Standard 50u Gold Rugged 1 = KVPX Connectors 2 = High speed 50u Gold Rugged 3 = Reserved	0 = Standard (XO) 1 = Stratum-3 (TCXO) 2 = OCXO	See <a href="#">Environmental Specification</a>
C = GbE Switch	F = JTAG Virtual Probe	J = Conformal Coating
0 = GbE Switch 1 = No GbE Switch	0 = No JTAG Virtual Probe 1 = JTAG Virtual Probe	0 = No coating 1 = Humiseal 1A33 polyurethane 2 = Humiseal 1B31 acrylic

## Environmental Specification

Option H	H = 0	H = 1
Operating Temperature	AC1* (-5°C to +55°C)	AC3* (-40°C to +70°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)
Storage Vibration	OS1* (20 g)	OS1* (20 g)
Humidity	95% non-condensing	95% non-condensing

### Notes:

\*Nomenclature per ANSI/VITA 47. Contact local Sales office for other specifications.

## Related Products

VPX518



- AMC FPGA carrier for FMC per VITA 57
- Xilinx Zynq-7000 FPGA in FFG-900 package (XC7Z100 or XC7Z045) with embedded ARM®
- Supported by DAQ Series™ data

VPX592



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

VPX599



- 3U FPGA Dual DAC and dual ADC per VITA 46
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC 12-bit @ 6.4 GSPS

# Contact

## VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

## Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

## VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

# Choose VadaTech

## We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

## We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

## We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

## We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



**vadatech**  
THE POWER OF VISION

## Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.  
DOC NO. 4FM737-12 REV 01 | VERSION 3.1 – APR/24