

## AMC Dual Channel DVI/VGA Graphics, Economic – AMC348

AMC Dual Channel DVI/VGA



### KEY FEATURES

- Based on Silicon Motion's SM750 graphics processor chipset
- Provides two separate Dual DVI Channels
- AMC.1 compliant
- PCIe x1 lane
- Single module, mid-size or full-size (see ordering options)
- 16MB of Memory
- Displays 1920x1080 @ 60 Hz
- Optional "Y" adapter cable to convert the DMS-59 connector to DVI-I or VGA connectors
- IPMI 2.0 compliant
- RoHS compliant

## AdvancedMC™

### Benefits of Choosing VadaTech

- Low cost graphics processor
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- AS9100 and ISO9001 certified company

The AMC348 is a VadaTech low cost AMC graphic module. Designed to meet the graphics needs of Military, Industrial and Telecom applications that requires a simple graphic interface.

The board features Silicon Motion's SM750 graphics processor chipset. The display mode supports screen resolutions up to 1920x1080 @ 60 Hz for dual mode monitor.

The AMC348 is AMC.1 compliant and is available in a single module, mid or full-size form factor. The front panel has an LHF style connector (DMS-59).

## INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

## BLOCK DIAGRAM

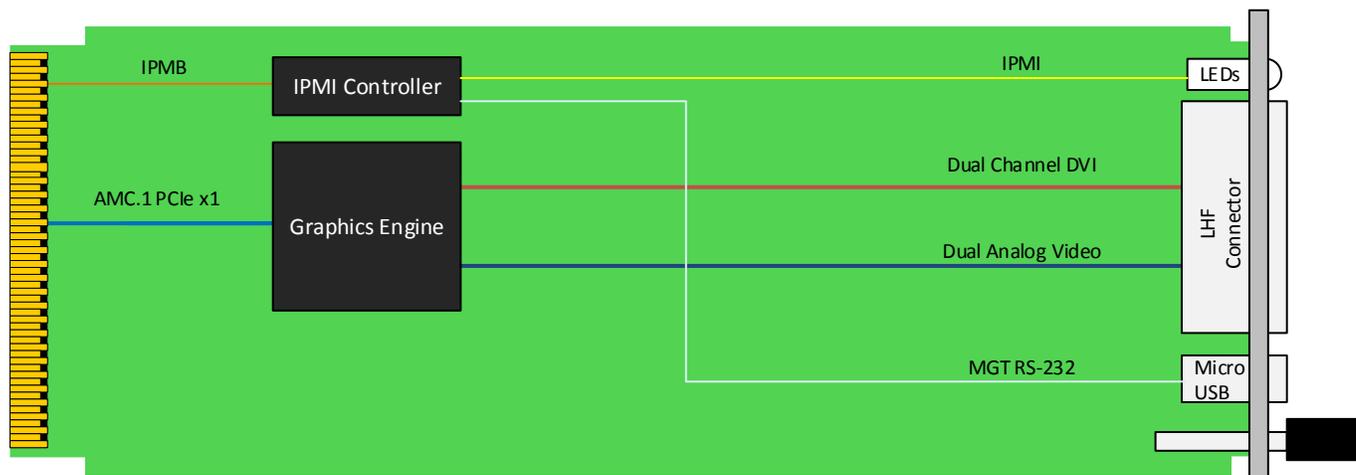


Figure 1: AMC348 Block Diagram

## FRONT PANEL

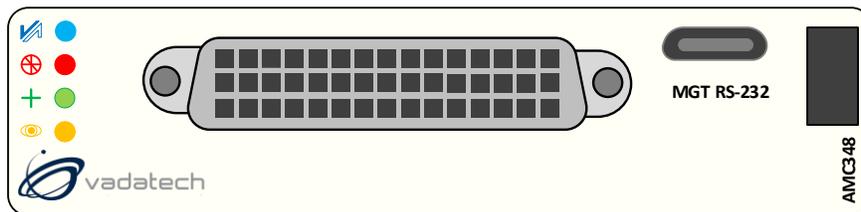


Figure 2: AMC348 Front Panel

## SPECIFICATIONS

Architecture		
Physical	Dimensions	Width: 2.89" (73.5 mm) Depth 7.11" (180.6 mm)
	Type	AMC Video DVI or VGA Video Adapter
	Dual Ports	Dual ports using "Y" Adapter Cable, either DVI or VGA (see ordering options)
	Video Resolution	Screen resolutions up to 1920x1080
	Memory	16 MB of memory
Standards		
AMC	Type	AMC.1
Module Management	IPMI	IPMI v2.0
PCIe	Lanes	x1
Configuration		
Power	AMC348	3 W
Environmental	Temperature	See ordering options and <a href="#">environmental spec sheet</a>
		Storage Temperature: -40° to +85°C
	Vibration	1 G, 5-500 Hz each axis
	Shock	30 Gs each axis
Front Panel	Relative Humidity	5 to 95% non-condensing
	Interface Connectors	Low Force Helix (LFH) connector
	Adapter	LFH to two DVI-I or LFH to two standard HD15 connectors (see notes)
	LEDs	IPMI Management Control
Software Support	Mechanical	Hot Swap Ejector Handle
	Operating Systems	Linux and Windows
Other		
MTBF	MIL Spec 217-F TBD Hrs.	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Warranty	Two (2) years	

# AMC Dual Channel DVI/VGA Graphics, Economic – AMC348

## ORDERING OPTIONS

### AMC348 – A0C – 000 – 00J

#### A = Adapter Cable

- 0 = No cable
- 1 = LFH to two DVI-I (“Y” cable)\*\*
- 2 = LFH to two VGA (“Y” cable)

#### C = Front Panel Size

- 1 = Reserved
- 2 = Mid-size
- 3 = Full-size

Notes: \*Edge of module for conduction-cooled boards

\*\*Min order quantity applies to this option, please contact VadaTech sales

#### J = Temperature Range and Coating

- 0 = Commercial (–5° to +55°C), No coating
- 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane
- 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic
- 3 = Industrial (–20° to +70°C), No coating
- 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane
- 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic
- 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane\*
- 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic\*

## RELATED PRODUCTS



AMC720 Intel Core i  
PrAMC



UTC010 Power Module



UTC002 MCH

## CONTACT US

#### VadaTech Corporate Office

198 N. Gibson Rd.  
Henderson, NV 89014  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +1 702 896-3337  
Fax: +1 702 896-0332

#### Asia Pacific Sales Office

7th Floor, No. 2, Wenhua Street, Neihu District,  
Taipei 114, Taiwan  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +886-2-2627-7655  
Fax: +886-2-2627-7792

#### VadaTech European Sales Office

VadaTech House, Bulls Copse Road,  
Southampton, SO40 9LR  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +44 2380 016403