

AMC719

QorIQ P4040/P4080 Processor AMC,
SRIO



AMC719

Key Features

- Processor AMC with Freescale QorIQ P4040/P4080
- Up to 16 GB DDR3 with ECC
- SRIO on ports 4-7 and 8-11 per AMC.4
- GbE per AMC.2
- Dual 10GbE via SFP+
- Single-module, mid-size per AMC.0

Benefits

- High-performance QorIQ P40x0 processor
- Multiple banks of memory allows large buffer sizes and queuing during processing
- SRIO dual x4 to backplane and 10GbE to front panel supports high-throughput communications
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Full system supply from the industry leader

AdvancedMC™



vadatech
THE POWER OF VISION



AMC719


The AMC719 is a Processor AMC (PrAMC) in a single-module, mid-size (full-size optional) AdvancedMC (AMC) form factor based on the Freescale P4040 and P4080. The module follows the AMC.4 and AMC.2 specifications. The SRIO runs as dual x4. The module has option for up to 16 GB of DDR3 memory with ECC.

The AMC719 provides Dual 10GbE via SFP+.


The module provides Dual GbE to the rear per AMC.2 specification on ports 0 and 1. It has single GbE to the front which is muxed with port 1.



Block Diagram

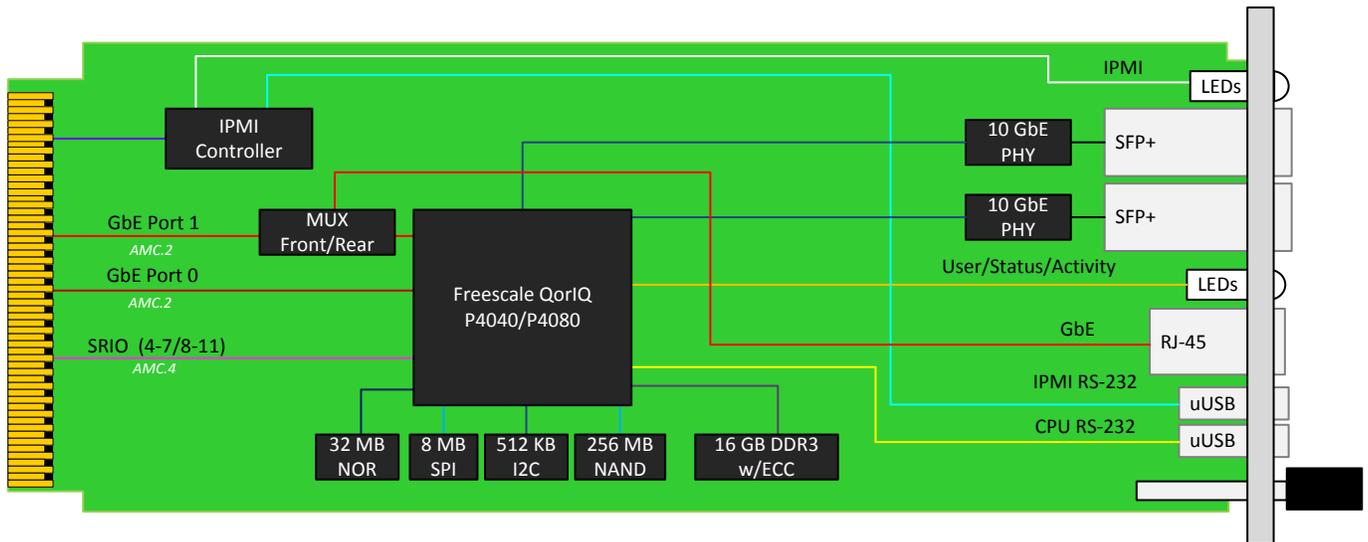

Front Panel

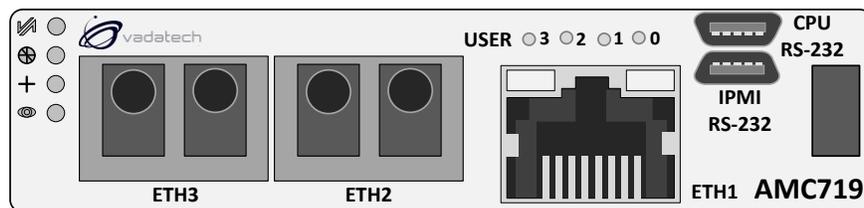

Specifications

Architecture	
Physical	Dimensions Single module, mid-size (full-size optional) Width: 2.89" (73.5 mm) Depth 7.11" (180.6 mm)
Type	Freescale QorIQ P4040 or 4080 processor up to 1.5 GHz Up to 16 GB DDR3 with ECC
Standards	
AMC	Type AMC.0, AMC.2 and AMC.4
Module Management	IPMI IPMI version 2.0
SRIO	Lanes Dual x4
Configuration	
Power	AMC719 ~35 W (P4080 @ 1.5 GHz)
	Temperature Operating temperature: -5° to 45° C (55°C for limited time, performance restrictions may apply), industrial versions also available (See environmental spec sheet) Storage Temperature: -40° to +90°C
	Vibration Operating 9.8 m/s ² (1G), 5 to 500Hz on each axis
	Shock Operating 325G / 2 ms, 160G / 1 ms
	Relative Humidity 5 to 95 per cent, non-condensing
Front Panel	Interface Connectors Single GbE via RJ-45, dual 10 GbE via SFP+ CPU RS-232 via micro USB IPMI RS-232 via micro USB
	LEDs IPMI management control Activity / Link and User LEDs
	Mechanical Hot swap ejector handle
Software Support	Operating System Linux and VxWorks
Conformal Coating	Humiseal 1A33 Polyurethane (Optional) Humiseal 1B31 Acrylic (Optional)
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty	Two (2) years

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and μ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

Ordering Options

AMC719 – ABC-0EF-0HJ

A = CPU Speed		
1 = P4040 @ 1.2 GHz 2 = P4040 @ 1.5 GHz 3 = P4080 @ 1.2 GHz 4 = P4080 @ 1.5 GHz		
B = DDR3 with ECC Memory	E = SFP+ Transceiver Port 0	H = Operating Temperature
0 = 4 GB 1 = 8 GB 2 = 16 GB	0 = None 1 = 10GBASE-SR 2 = Reserved 3 = 10GBASE-LRM 4 = 10GBASE-LR	0 = Commercial 1 = Industrial
C = Front Panel Size	F = SFP+ Transceiver Port 1	J = Conformal Coating
1 = Reserved 2 = Mid-size, MTCA.0 3 = Full-size, MTCA.0 4 = Reserved 5 = Mid-size, MTCA.1 (captive screws) 6 = Full-size, MTCA.1 (captive screws)	0 = None 1 = 10GBASE-SR 2 = Reserved 3 = 10GBASE-LRM 4 = 10GBASE-LR	0 = None 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Related Products

AMC610



- AMC.1 and AMC.3
- 4 Gigabit Ethernet ports via RJ-45
- On board 2.5" disk with direct connect to Ports 2 and 3

UTC002



- 400 MHz CPU with 64 MB DDR for MCMC (MicroTCA Carrier Management Controller) and Shelf Manager
- Layer 2 managed GbE to each AMC (optional)
- Non-blocking PCIe Gen 3 (x4), to each slot with option for SRIO or 10 GbE (Layer 2 managed)

UTC010



- Dual -36 VDC to -75 VDC input,
- 792W (available in 396W)
- Hot swappable with support for power module redundancy

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

Ocean Village Innovation Centre, Ocean Way, Ocean Village,
Southampton, SO14 3JZ

Phone: +44 2380 381982 | Fax: +44 2380 381983

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2017 VadaTech Incorporated, All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 8.0 – SEP/17