

### ATC117KEY FEATURES

- AdvancedTCA 3.0 Release 2.0 compliant
- PICMG 2.16 (ANSI/VITA 31.1)
- PCI-X @ 133MHz
- System Controller/Host or Slave/Agent
- Shelf Manager or Node board
- Standalone or PCIe up/downstream to other ATC113/114/115/ 116/117/118 or the PCI113 carrier boards via the rear
- PCIe up/downstream via fiber or copper
- IPMI Version 2.0 compliant
- RoHS compliant


The ATC117 is VadaTech next generation Advanced Telecom Computing Architecture (AdvancedTCA) carrier which allows for the integration of a CompactPCI board into the AdvancedTCA environment. The ATC117 provides a PCI-X interface to the CompactPCI board which can operate at 133MHz. The ATC117 allows the CompactPCI board to be a Master or Slave. The ATC117 has a PCIe up/downstream port to interface to other blades or other VadaTech products, such as the ATC113/114/115/116/117/118, PCI113 and AMC113. This modular approach allows widely available cPCI form factor boards to be integrated into an ATCA chassis.

**AdvancedTCA**®

# ATCA Carrier for CompactPCI

## SPECIFICATIONS


Architecture		
Physical	Dimensions	Width: 12.69 in. (322.25 mm)
		Depth: 11.02 in. (280 mm)
Type	ATCA Carrier	CompactPCI board
Standard		
CompactPCI	Type	PICMG 2.16 (ANSI/VITA 31.1)
Module Management	IPMI	IPMI Version 2.0
PICMG	ATCA	PICMG 3.0 R2.0
Configuration		
Power	ATC117	6W without cPCI board
		Up to 150 watts is available for the cPCI board
Environmental	Temperature	Operating Temperature: 0° to 60° C (Air flow requirement is to be greater than 200 LFM)
		Storage Temperature: -40° to +90° C
	Vibration	1G, 5-500Hz each axis
	Shock	30Gs each axis
Expansion	PCle	5 to 95 percent, non-condensing
		Expansion to another ATC117 or to AMC113, ATC114, ATC115, ATC116, ATC117, ATC118, or the PCI113 via Zone 3 or front panel QSFP
Rear I/O	Zone Three	CompactPCI P5 connector routes to Zone 3
		PCle x4 routed to the rear for expandability
		IPMI Management RS-232 port
Front Panel	LEDs	P3 connector of the cPCI to Zone 2 Base channel
		PCle Expansion via QSFP connector
	Mechanical	PCle Lane Good
Software Support	Operating Systems	Hot Swap Ejector Handle
		Linux, Windows, Solaris and VxWorks
Other		
MTBF	MIL Spec 217-F > 220,000 Hrs.	
Certifications	Designed to meet FCC, CE and UL certifications where applicable	
Standards	VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards	
Compliance	RoHS and NEBS	
Warranty	Two (2) years	
Trademarks and Logos	The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.	

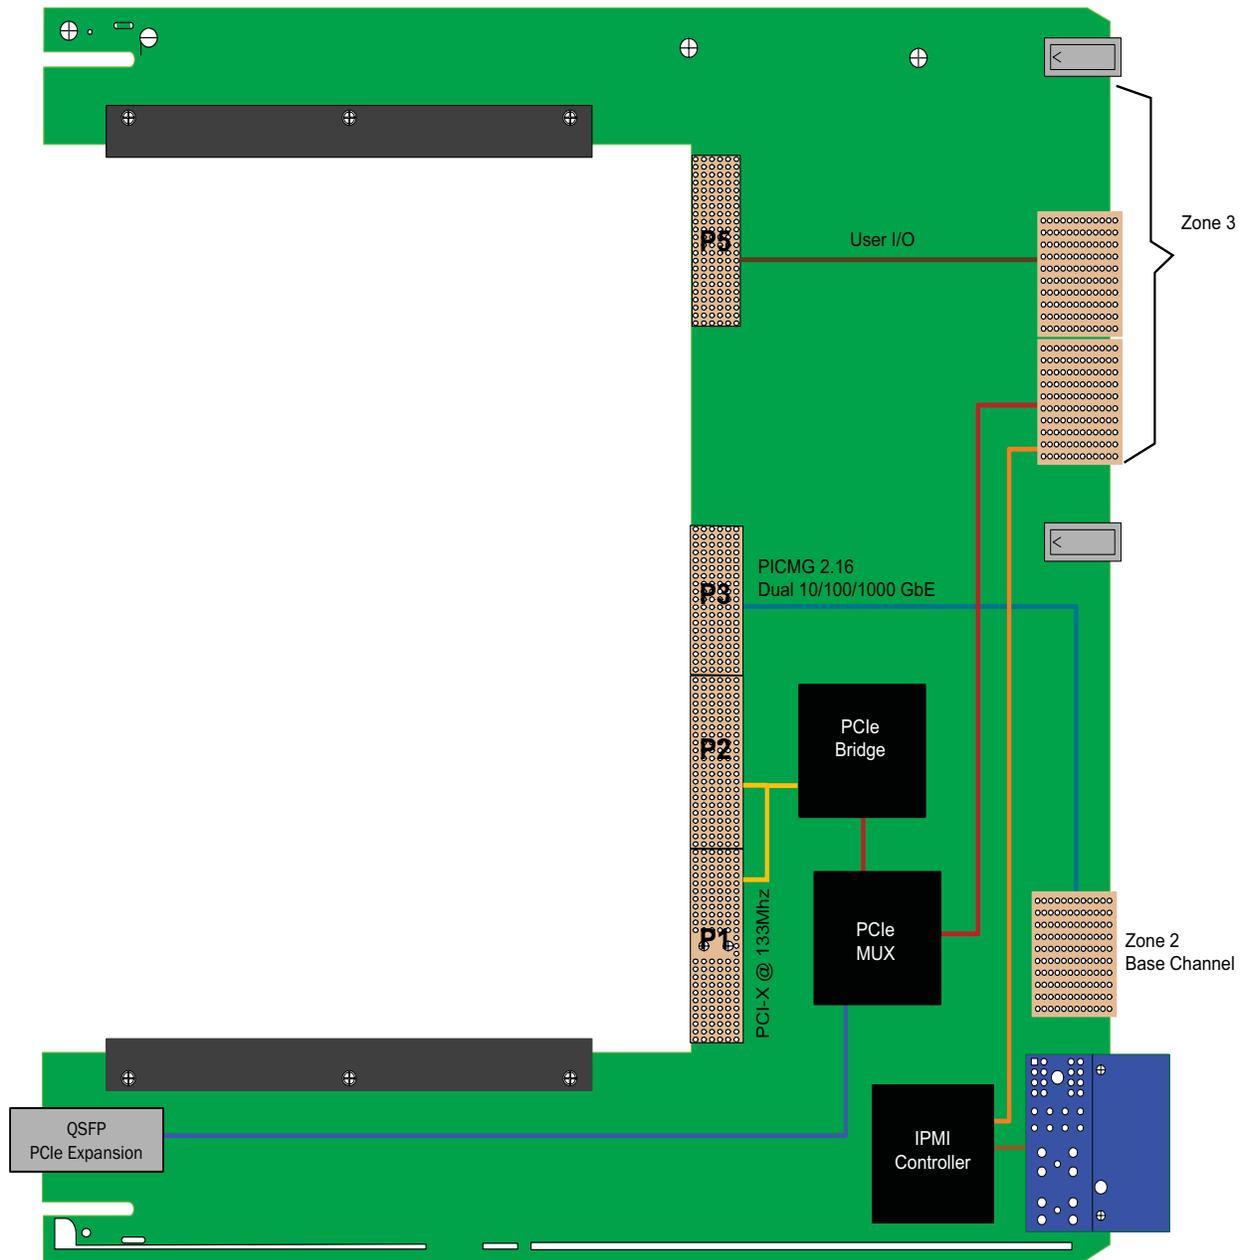

**FIGURE 1.** ATC117 Functional Block Diagram

# ATCA Carrier for CompactPCI

**FIGURE 2:** Typical application (the module could run standalone)†

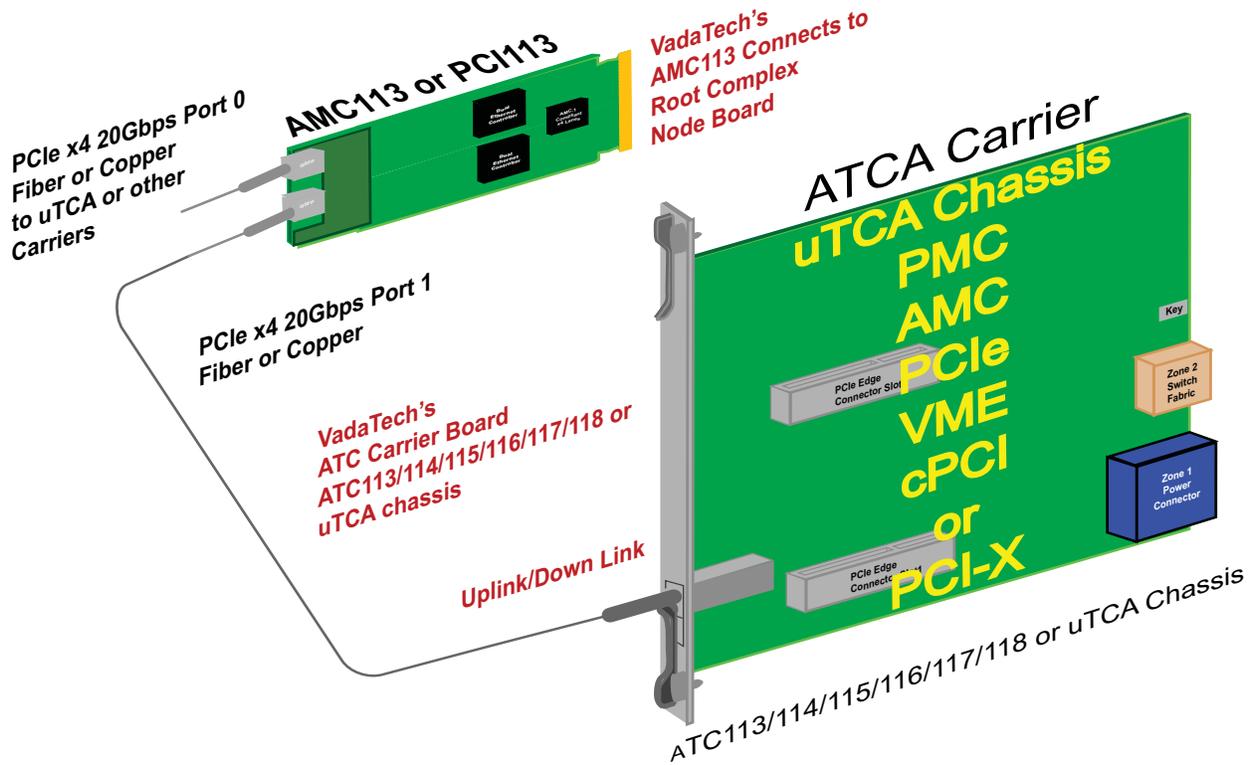

## ORDERING OPTIONS

ATC117 - 000 - 000 - 00J\*

J = Conformal Coating

0 = None

1 = Humiseal 1A33 Polyurethane

2 = Humiseal 1B31 Acrylic

\*Vadatech can design custom Rear Transition Modules (RTM) for this product or any ATCA carrier board with a minimum order and no NRE.

Document No \_\_\_\_\_ Date: January 2010 Pass one

