

FMC151

Multi I/O FMC Module, ECL or
NECL Input/Output,
RS-422 and Fiber Optics



FMC151

Key Features

- 12 x TX ECL or NECL RX/TX
- 4 x RS-422 RX/TX
- Dual Fiber Optics ST style (1300-nm wave length, 2KM)
 - FDDI
 - ATM
 - 100BAES-FX
 - Custom protocol
- User LED

Benefits

- Single module to provide multiple I/O
- Utilizing commercially-available, standard high-density connector for ease of cabling
- All I/O types utilize differential signaling between the transceivers on the FMC and the FPGA on the carrier for optimal signal integrity across the FMC connector
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



FMC151

The FMC151 is an FPGA Mezzanine Card (FMC) per VITA 57.1 standard (see comment below) offering a small footprint and allowing for general-purpose I/O expansion with Fiber Optics.

The FMC151 is an FPGA Mezzanine Card (FMC) per VITA 57.1 standard (see comment below) offering a small footprint and allowing for general-purpose I/O expansion with Fiber Optics.

The Module does not follow the VITA57 height constrain. It has an additional Daughter card that mates to the FMC module to allow it to accommodate the Fiber Optics. For example, on the AMC FPGA FMC Carriers, it requires a full-height AMC panel to accommodate all the I/Os. The Carrier must have a monolithic panel (the FMC151 does not come with an FMC panel) to cover the FMC151 I/O envelope.



Figure 1: FMC151

Block Diagram

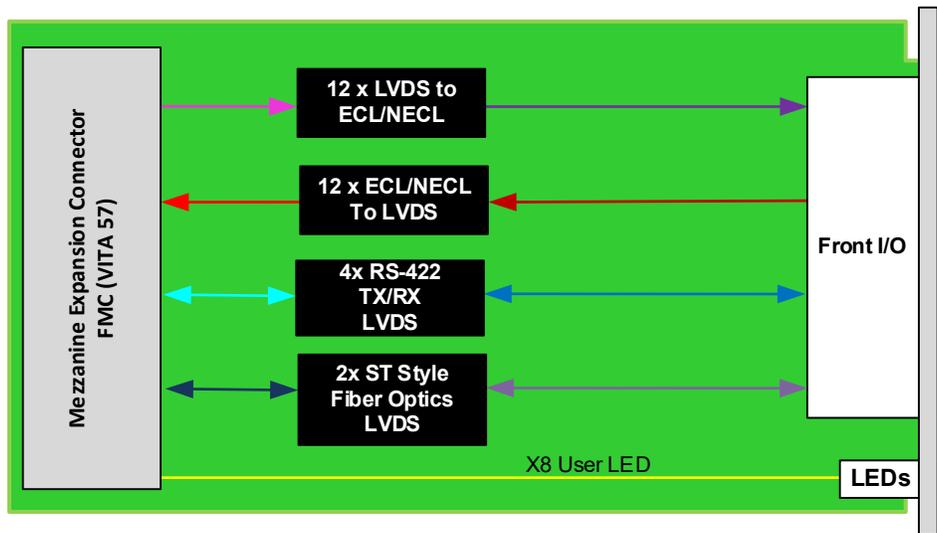


Figure 1: FMC151 Functional Block Diagram

Specifications

Architecture		
Physical	Dimensions	Single Module Width: 2.71" (69 mm) Depth: 3.01" (76.5 mm)
Type	FMC	Digital I/O
Standards		
FMC	Type	ANSI/VITA 57.1 - 2008
Configuration		
Power	FMC151	5W
Environmental	Temperature	See Ordering Options Storage Temperature: -40° to +85°C
	Altitude	40,000 ft non-operating
	Vibration	Operating 9.8 m/s ² (1G), 5-500 Hz
	Shock	Operating 30Gs each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	High-density connector (latching style) for I/O and ST-Style Fiber Optics
	LEDs	Status
Software Support	Operating System	Agnostic
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards
Warranty		Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

FMC151 – 000-000-00J

		J = Temperature Range and Coating
		0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane* 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic*

Notes: * Conduction cooled; temperature is at edge of module. Consult factory for availability.

Related Products

AMC599



- Xilinx UltraScale™ XCKU115 FPGA
- Dual ADC 12-bit @ 6.4 GSPS or quad ADC at 3.2 GSPS
- Dual DAC 16-bit @ 12 GSPS (AD9162 or AD9164)

AMC581



- Xilinx Zynq® UltraScale+ XCZU15EG FPGA
- 8 GB of 64-bit wide DDR4 Memory (single bank) with ECC
- MPSoC with block RAM and UltraRAM

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2019 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.1 – OCT/20