


## FMC213 – FMC High-speed Quad ADC 16-bit @ 250 MSPS, DAC 14-bit @ 5.7 GSPS

FMC, Quad ADC and Single DAC

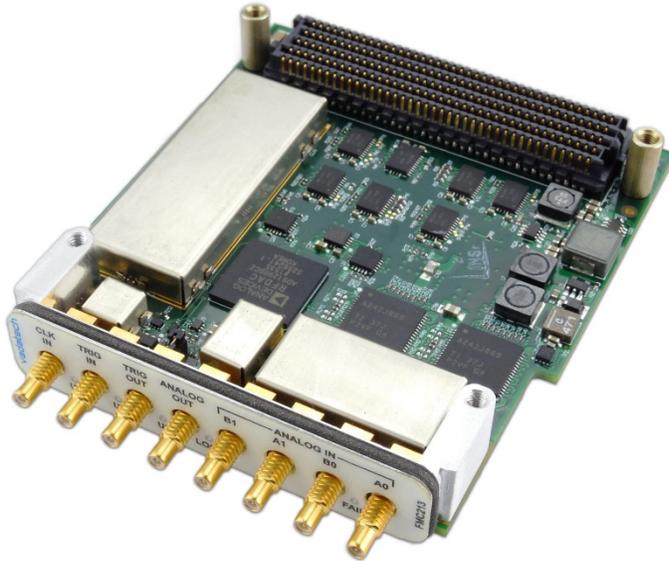

### KEY FEATURES

- FPGA Mezzanine Card (FMC) per VITA 57
- Quad ADC based on ADS42JB69:
  - JESD204B compliant
  - Analog Front end bandwidth 900MHz
  - 16-Bit Resolution @ 250 MSPS
- DAC based on AD9129:
  - Single DAC 14-bit @ 5.7 GSPS
  - Direct RF Synthesis @ 2.8 GSPS Data Rate
- RF front panel reference clock input
- Trig In/Out
- RoHS compliant

### Benefits of Choosing VadaTech

- Array of FMC's and FMC carriers available from VadaTech
- Design utilizes proven VadaTech subcomponents and engineering techniques
- Electrical, mechanical, software, and system-level expertise in house
- Full ecosystem of front and rear boards, enclosures, specialty modules, and test/dev products from one source
- AS9100 and ISO9001 certified company

The FMC213 is an FPGA Mezzanine Card per VITA 57 specification with a high speed quad ADC and a single DAC.

The ADC converter utilizes the two TI part number ADS42JB69 (JESD204B) dual channel 16-bit @ 250 MSPS and the DAC is based on Analog Devices part number AD9129 14-bit @ 5.7 GSPS.

The module has a wide-band PLL which can take its reference clock via the front panel, FMC Carrier or the on board reference.

BLOCK DIAGRAM



Figure 1: Block Diagram

## SPECIFICATIONS

| Architecture      |   |   |
|-------------------|---|---|
| Physical          | Dimensions  | Single module   |
|                   |   | Width 2.71" (69 mm)   |
|                   |   | Depth 3.01" (76.5 mm)   |
| Type              | FMC   | Quad Analog to Digital Converter (ADC) and single Digital to Analog Converter (DAC) |
|                   |   | FMC connector   |
| Standards         |   |   |
| FMC               | VITA-57   | ANSI/VITA 57.1-2008   |
| Configuration     |   |   |
| Power             | FMC213  | 6 W   |
| Environmental     | Temperature   | Operating Temperature: -5° to 55° C   |
|                   |   | Storage Temperature: -40° to +85° C   |
|                   | Vibration   | 1G, 5 to 500 Hz on each axis  |
|                   | Shock   | 30Gs each axis  |
|                   | Relative Humidity   | 5 to 95 percent, non-condensing   |
| Front Panel       | Interface Connectors  | 8 SSMC Connectors   |
|                   | LEDs  | Status  |
| Conformal Coating |   | Humiseal 1A33 Polyurethane (Optional)   |
|                   |   | Humiseal 1B31 Acrylic (Optional)  |
| Other             |   |   |
| MTBF              | MIL Hand book 217-F @ TBD Hrs   |   |
| Certifications    | Designed to meet FCC, CE and UL certifications where applicable           |   |
| Standards         | VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards |   |
| Warranty          | Two (2) years   |   |

### INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of ATCA and  $\mu$ TCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTM), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

### Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

# FMC213 – FMC High-speed Quad ADC 16-bit @ 250 MSPS, DAC 14-bit @ 5.7 GSPS

## ORDERING OPTIONS

### FMC213 – A00 – 000 – G0J

#### A = Analog Front End Filter for ADC

- 1 = Frequency input of less than 250MHz
- 2 = Frequency input of greater than 250MHz
- 3 = DC coupled (ADC ONLY)

#### G = FMC Board Spacing

- 0 = 10 mm (per VITA-57 specification)
- 1 = 17.5 mm \*

#### J = Temperature Range and Coating

- 0 = Commercial, No coating
- 1 = Commercial, Humiseal 1A33 Polyurethane
- 2 = Commercial, Humiseal 1B31 Acrylic
- 3 = Industrial, No coating
- 4 = Industrial, Humiseal 1A33 Polyurethane
- 5 = Industrial, Humiseal 1B31 Acrylic
- 6 = Military, Humiseal 1A33 Polyurethane\*
- 7 = Military, Humiseal 1B31 Acrylic\*

\* For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC.

## RELATED PRODUCTS



AMC516 Virtex-7  
FPGA



AMC532 Stratix-V  
FPGA



FMC109 Quad  
SFP+ FMC

## CONTACT US

#### VadaTech Corporate Office

198 N. Gibson Rd,  
Henderson, NV 89014  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +1 702 896-3337  
Fax: +1 702 896-0332

#### Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District,  
Taipei 114, Taiwan  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +886-2-2627-7655  
Fax: +886-2-2627-7792

#### VadaTech European Sales Office

VadaTech House, Bulls Copse Road,  
Southampton, SO40 9LR  
Email: [info@vadatech.com](mailto:info@vadatech.com)  
Telephone: +44 2380 016403