

FMC237

75 MHz to 6 GHz Quad Versatile Wideband Transceiver (MIMO), FMC



FMC237

Key Features

- Complete transceiver signal chain solution using Dual Analog Devices (ADRV9009) on a single-wide FMC
- Frequency range 75 MHz to 6 GHz, receiver BW up to 200 MHz and transmitter synthesis BW up to 450 MHz
- Onboard clocking with multi-card synchronization capability. BSP sync's dual ADRV9009 as standard
- Compatible with Analog Devices design tools for ADRV9009
- MIMO transceiver is Time Domain Duplex (TDD) for 3G/4G/5G
- FPGA Mezzanine Card (FMC) per VITA 57

Benefits

- Ideal for 3G/4G/5G SDR applications with wideband range versatility
- Transmit channels and receive channels sync'd across both ADRV9009 as standard
- High modulation accuracy with ultralow noise
- Array of FMC's and FMC carriers available from VadaTech
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



FMC237

The FMC237 is a FPGA Mezzanine Card (FMC) per VITA 57.1 standard. This low powered unit boasts a small footprint and utilizes two ADRV9009 highly integrated, wideband RF transceivers. VadaTech BSP supports TX sync and RX sync across the transceivers.

The ADRV9009 features dual channel Transmitters (TX) and Receivers (RX) with integrated synthesizer and digital signal processing functions. Each complete RX and TX subsystem includes DC offset correction, Quadrature Error Correction (QEC), and programmable digital filters. The transceivers also provide Automatic Gain Control (AGC) and flexible external gain control modes, allowing significant flexibility in setting system level gain dynamically.

The FMC237 operates within the 75 MHz to 6.0 GHz frequency range, covering most licensed and unlicensed bands. The clocking is via the front panel or an internal clock. This makes the FMC237 an ideal choice for the development and/or deployment of advanced RF solutions.

The VadaTech family of Multiple Input Multiple Output (MIMO) modules are the most versatile FMCs of this type on the market.

The FMC237 is identical to the FMC239, except the FMC237 has LO input for direct RF clock and does not have the external GPIO.



Figure 1: FMC237

Block Diagram

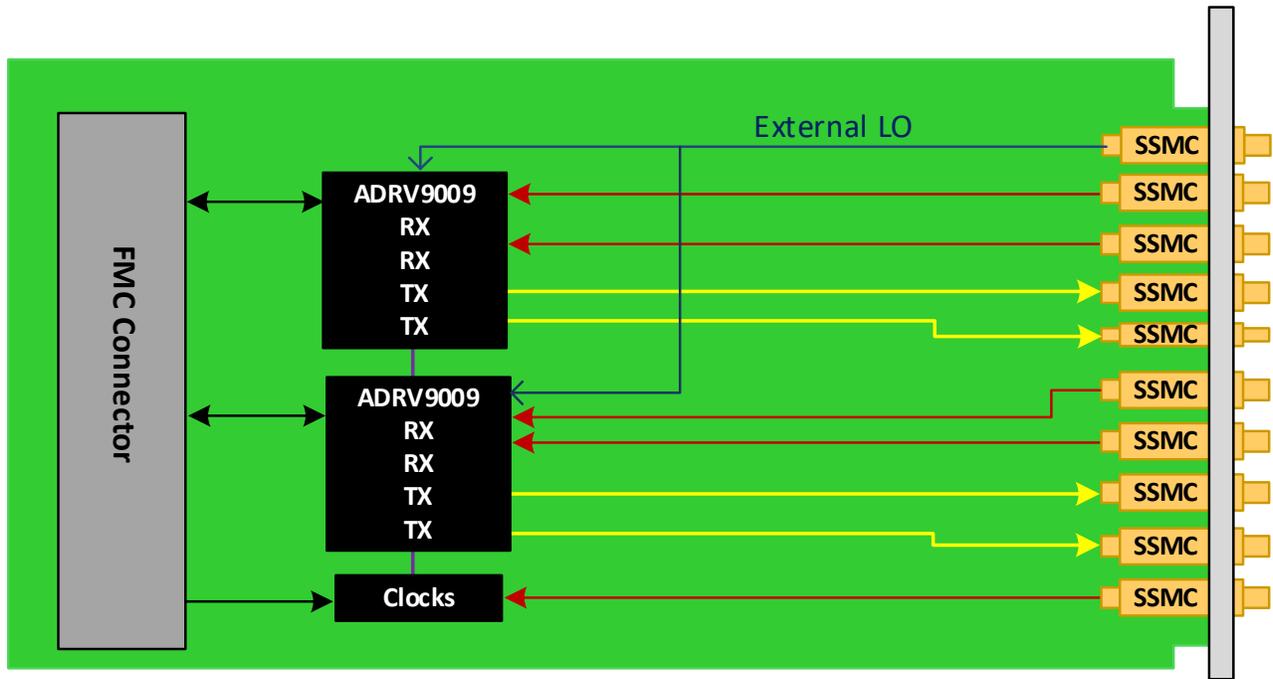


Figure 2: FMC237 Functional Block Diagram

Front Panel

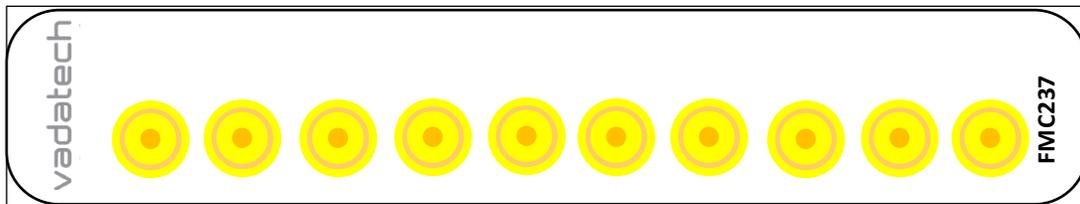


Figure 3: FMC237 Front Panel

Supported Software

The FMC237 is compatible with Analog Devices design tools for ADRV9009.

The screenshot displays the 'ADRV9009 Transceiver Evaluation Software' interface. The top menu includes 'Connect', 'Program', 'Device', 'File', 'Tools', and 'Help'. Below the menu is a toolbar with options like 'Config', 'Iron Python Script', 'ObsRx Data', 'Receive Data', 'Transmit Data', and 'TDD/FDD Switching'. The main window is titled 'Configuration' and contains a block diagram of the ADRV9009 transceiver. The diagram shows two receiver channels (ORX1, ORX2) and two transmitter channels (TX1, TX2). It includes components like MUX, LO1, LO2, ARM M3, ADC, LPF, DAC, and Digital Processing blocks. The interface also features a configuration table and a status bar at the bottom.

Device	ADRV9008-2	LO PLL	Freq(MHz)	Ext. LO	RFPLL Phase Sync
Device Clock	122.88MHz	RF PLL	1800	NO	Disable

Tx Channel	Attenuation
Tx1	0.00
Tx2	0.00

DAC Enabled

Higher Power Faster Tx Switching Time

Lower Power Slower Tx Switching Time

Zynq Platform: **Disconnected**

ANALOG DEVICES

Figure 4: FMC237 Compatible Design Tools for ADRV9009

Specifications

Architecture		
Physical	Dimensions	Single Module
		Width 2.71" (69 mm)
		Depth 3.01" (76.5 mm)
Type	FMC	Quad wideband transceiver (dual ADRV9009) FMC connector
Standards		
FMC	VITA 57	ANSI/VITA 57.1-2008
Configuration		
Power	FMC237	11W
Performance	Broadband transmitter	Tuneable range from 75 MHz to 6 GHz, maximum synthesis bandwidth 450 MHz
		Transmitter attenuation power control range: 0 to 32 dB
	Broadband receiver	Tuneable range from 75 MHz to 6 GHz, maximum receiver bandwidth 200 MHz Receiver gain range: 30 dB
Environmental	Integrated synthesizers	2.3 Hz typical LO step size
	Temperature	See Ordering Options (air flow requirements >400 LFM)
		Storage Temperature: -40° to +85°C
	Vibration	1G, 5 to 500 Hz on each axis
	Shock	30Gs each axis
Relative Humidity	5 to 95% non-condensing	
Front Panel	Interface Connectors	10x SSMC Front Panel Connector
	LEDs	Status
Software Support	Operating System	Agnostic
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

FMC237 – 0B0-000-0HJ

B = VCXO		H = Operating Temperature
0 = 100 MHz 1 = 122.88 MHz 2 = 153.6 MHz 3 = Reserved 4 = Reserved		0 = Commercial (-5° to +55°C) 1 = Industrial (-20° to +70°C) 2 = Extended (-40° to +80°C)
		J = Conformal Coating
		0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

Related Products

AMC515



- AMC FPGA carrier for FMC per VITA 57
- AMC Ports 4-11 are routed to FPGA (protocols such as PCIe, SRIO, XAUI, etc. are FPGA programmable)
- Xilinx Virtex-7 XC7V2000T in 1925 package

FMC108



- Single width FMC per VITA 57
- Two QSPF+ cages for 10GbE/SRIO/PCIE and Aurora
- Re-driver on both ports for a better signal quality

FMC223



- Single module AD9739 DAC 14-bit @ 2.5 GSPS
- 2 Vpp differential Analog output swing
- Programmable DSP clock

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhua Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.2 – JAN/22