

PCI122

PCIe Gen4 x16 Bus Expansion via
Quad x4 SFF-8644 (as a single
combined x16)

PCI122



vadatech
THE POWER OF VISION

Key Features

- PCIe Gen4 (x16) Bus Expansion
- Links to external devices via Quad PCIe x4 SFF-8644 connectors for x16 uplink, dual x8 or quad x4
- Allow for both optical as well as passive copper cable
- Bifurcation allows a single root complex to connect up to four end points via four x4 lanes
- Programmable Retimer/Conditioner for different length of cable

Benefits

- VadaTech has full eco-system across multiple I/O modules
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

PCI 
EXPRESS®



PCI122

The PCI122 is one of VadaTech's 4th generation PCIe expansion module based on the PCI-SIG specification. The Module has a Retimer/Conditioner to improve signal integrity for enhancing system performance and reliability across long cables. It removes both random and deterministic jitter from the input signals eliminating inter-symbol interference and resets the output jitter budget. It supports the full 16 lanes.

The Retimer/Conditioner configuration is programmable for different length of cable via the RS-232 port.

The PCI122 allows expansion to an external module via quad SFF-8644 x4 connectors as a combined x16, or dual x8 or quad x4. The x16 bifurcation allows connecting from the root complex to multiple end points.

The SFF-8644 supports both active optical and passive copper cables. With the optical cables the root complex and the end point could be 100 meters away.

Figure 1: PCI122

Block Diagram

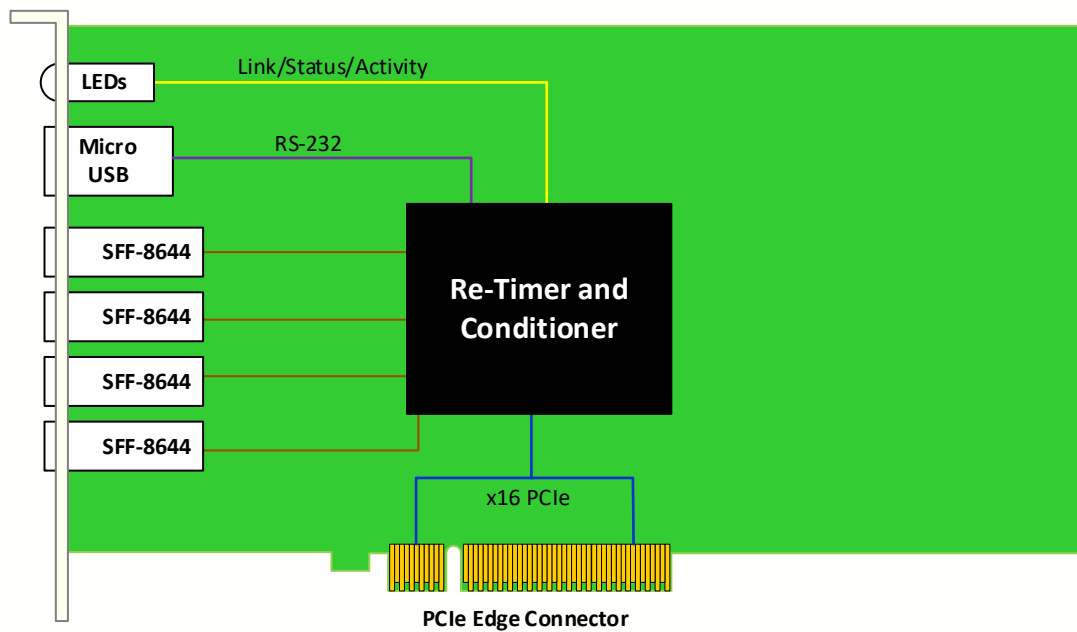


Figure 2: PCI122 Functional Block Diagram

Front Panel

Figure 3: PCI122 Front Panel

Specifications

Architecture		
Physical	Dimensions	Single Module
		Width: 2.71" (69 mm)
		Depth: 3.01" (76.5 mm)
Type	PCIe	PCIe Module for I/O Bus Expansion
Standards		
PCIe	Type	x16 Lane edge style per PCIe Sig specification
Configuration		
Power	PCI122	6W
Environmental	Temperature	See Ordering Options
		Storage Temperature: -40° to +85°C
	Altitude	40,000 ft non-operating
	Vibration	Operating 9.8 m/s ² (1G), 5-500 Hz
	Shock	Operating 30Gs each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	Quad SFF-8644 x4 for x16 uplink
		LEDs Status
Software Support	Operating System	Agnostic
Other		
MTBF	MIL Hand book 217-F@ TBD hrs	
Certifications	Designed to meet FCC, CE and UL certifications, where applicable	
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards	
Warranty	Two (2) years, see VadaTech Terms and Conditions	

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

PCI122 – ABC-000-0HJ

A = Number SFF-8644 cables*		
0 = None 1 = One 2 = Two 3 = Three 4 = Four		
B = SFF-8644 Cable Type Copper*		H = Temperature Range
0 = None 1 = 1M 2 = 2M 3 = 3M 4 = 5M 5 = Reserved		0 = Commercial (–5° to +55°C) 1 = Industrial (–20° to +70°C) 2 = Extended (–40° to +85°C)
C = SFF-8644 Cable Type Optical*		J = Conformal Coating
0 = None 1 = 10M 2 = 50M 3 = 100M		0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic

*Note: Depending on the number of cables ordered (option A), cables will be identical

Related Products

PCI592



- PCIe FPGA carrier for FMC+ per VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Active cooling for FPGA and FMC+

PCI596



- PCIe x16 FPGA carrier for FMC+ per VITA 57.4
- Xilinx UltraScale+™ VU13P FPGA
- Allows expansion of a daughter card on top of the FMC for more I/O

PCI325



- Multi-Channel Synchronous/Asynchronous RS-422 communication
- 24 – RS-422 input pairs
- 30 – RS-422 output pairs

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 1.1 – OCT/25



vadatech
THE POWER OF VISION