

UTC042

Rugged 3rd Gen MicroTCA Carrier Hub (MCH), 40GbE/PCIe Gen 3



UTC042

Key Features

- MTCA.1 ruggedization
- Unified 1 GHz quad-core CPU for MicroTCA Carrier Management Controller (MCMC), Shelf Manager, Clocking, and Fabric management
- Automatic fail-over with redundant UTC042s
- 1GbE base switch with dual 100/1000/10G uplink
- Full Layer 2 or 3 managed Ethernet Switches
- Non-blocking PCIe Gen 3, SRIO Gen 2, 10GbE/40GbE, or Crossbar Switch option to AMC fat pipes with options for up to 40GbE uplink
- Low-jitter M-LVDS clock distribution crossbar matrix
- PLL synthesizer for generating any clock frequency disciplined to GPS/SyncE/IEEE1588
- Single module, full size per AMC.0

Benefits

- Suitable for environment subject to higher level of shock and vibration
- FPGA fabric option supports arbitrary scatter/gather or shelf-level signal processing
- Front-panel fabric expansion uses standard industry cables with copper or fiber options
- Sophisticated clocking features enabling GPS/IEEE1588/SyncE/NTP Grand Master Clock
- Virtual JTAG capability for remote programming and debugging eases FPGA code development
- VadaTech's Scorpionware® Shelf Management Software included at no additional cost



vadatech
THE POWER OF VISION

μTCA®



UTC042

The VadaTech UTC042 is a rugged version of the UTC004 (the most feature-rich MCH on the market). The front I/O Dual Ethernet Ports have changed from 10G copper to the 1 Gb copper, all other I/Os match the UTC004.

The management software is based on VadaTech's robust Carrier Manager and Shelf Manager which have been deployed for years with proven results. The MCMC manages the Power Modules, Cooling Units, and up to 12 AMCs within the chassis. It also manages the optional PCIe Gen3, SRIO Gen2, 40GbE/10GbE or Crossbar Fat Pipe switches as well as the standard GbE with 1GbE uplink Base Channel switch.

The Ethernet Switches are managed with an enterprise grade Layer 2 or 3 switching/routing stack and they support Synchronous Ethernet.

The unit runs Linux on its centralized quad-core CPU and is hot-swappable/fully redundant when used in conjunction with a second instance of the module. The firmware is HPM.2 compliant which allows for easy upgrades.

UTC042 provides Master JTAG services to the AMCs via the JSM and has advanced clocking features including grand master clock and high-quality clock distribution/synthesis.

To withstand the higher levels of shock and vibration, VadaTech offers additional mechanical support and mechanical modifications (including heatsinks).



Figure 1: UTC042

Block Diagram

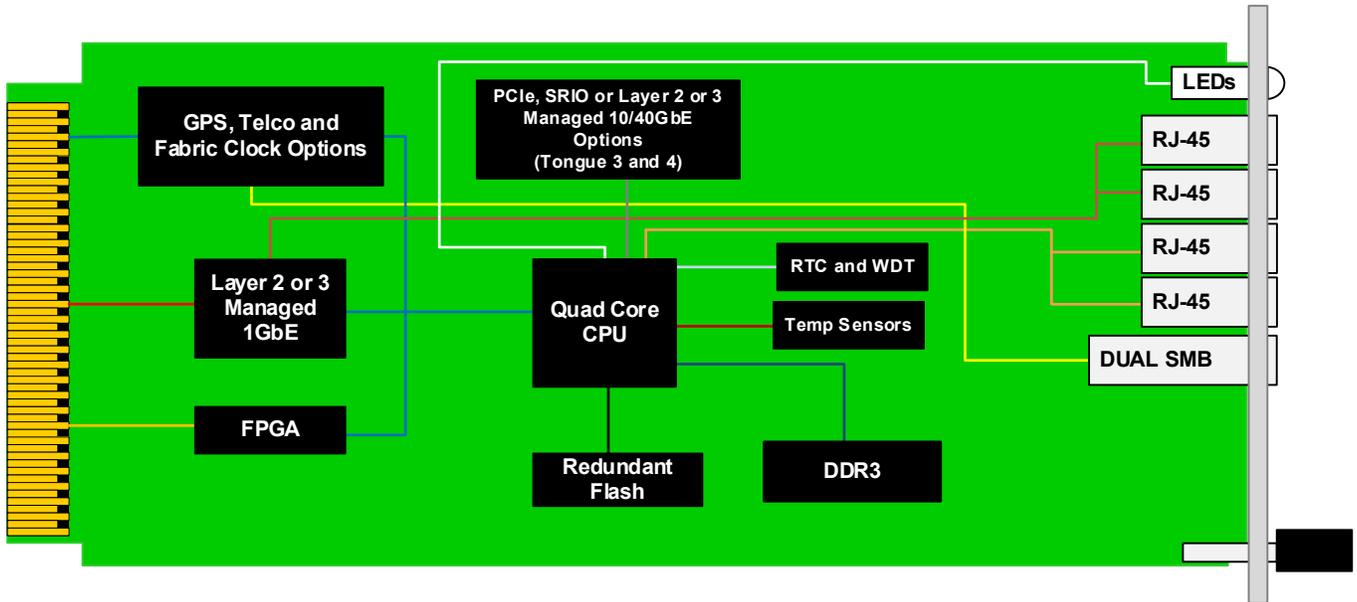


Figure 2: UTC042 Functional Block Diagram

Front Panel

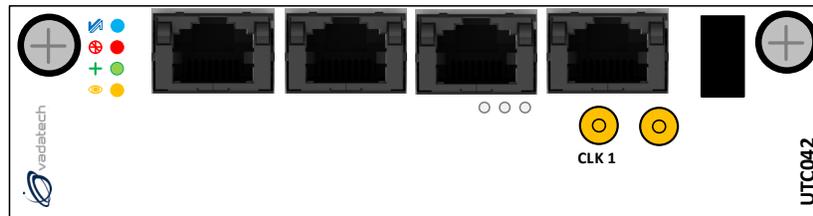


Figure 3: UTC042 Front Panel

Fabric Variations and General Connectivity

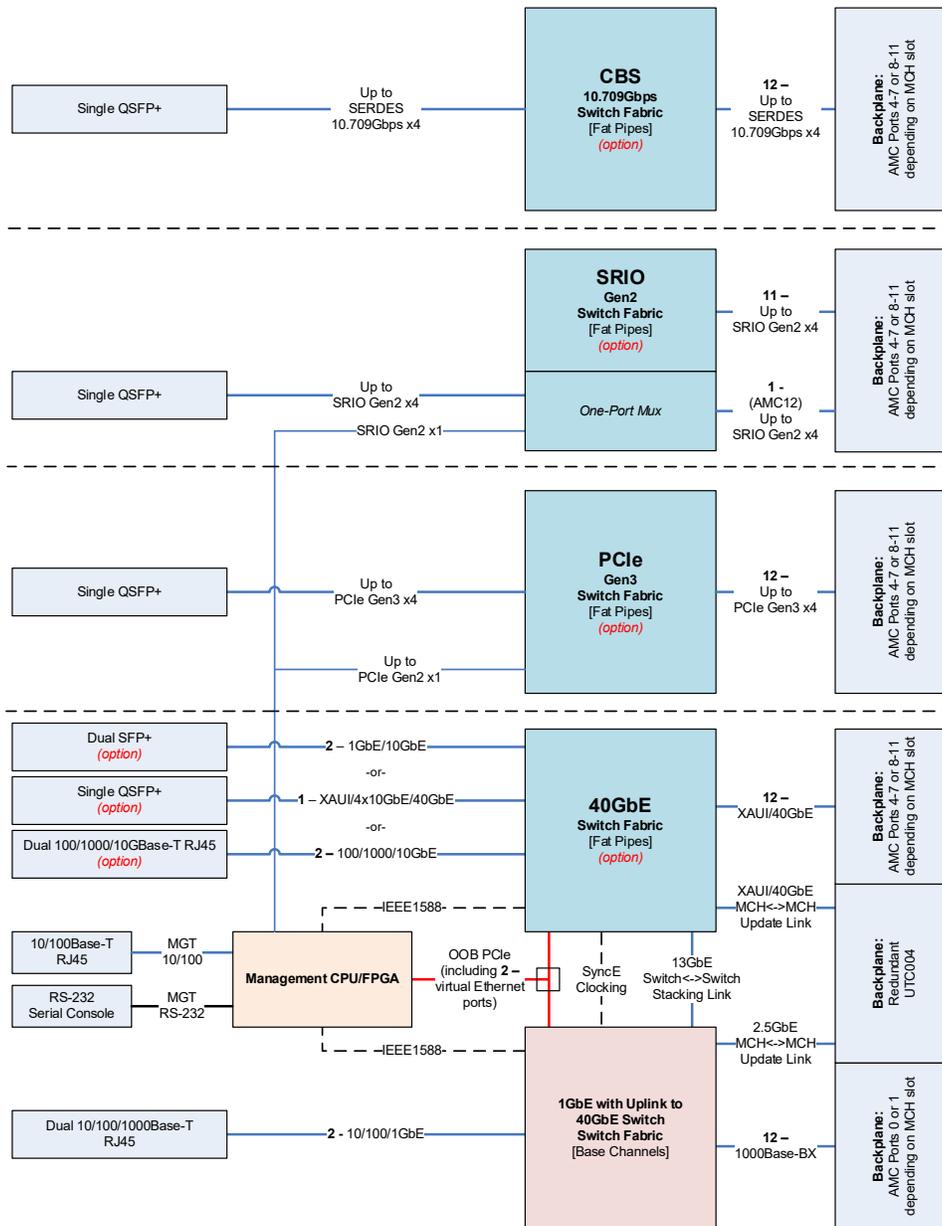


Figure 4: UTC042 Connectivity and Fabric Options

Feature	UTC001/UTC002/UTC003	UTC042
CPU Design/Upgrade Scheme	Up to 4 individual sub-system CPUs	Single quad core
Base/Fat Pipes Ethernet	GbE, 10GbE	GbE, 40GbE
Layer 2 Ethernet Fabrics (Switching)	Yes	Yes
Layer 3 Ethernet Fabrics (Routing)	No	Yes
Built-in GPS Receiver Option	No	Yes
Clock Routing/Synthesis	FPGA matrix/integer dividers	CBS matrix/PLL synthesis
IEEE 1588/NTP Grand Master Clock	No	Yes
Synchronous Ethernet	No	Yes
JTAG Master/Virtual Probe	No	Yes

Table 1: Comparison Table for Previous VadaTech MCH Generations

Architecture

IPMI Carrier Manager, Shelf Manager and Protocol Analyzer

The UTC042 utilizes the same proven standards-compliant IPMI management stack that has been utilized successfully in our previous generation MCH products. It supports carrier manager, shelf manager, and protocol analyzer operations to help facilitate a seamless chassis integration experience. The IPMI stack enables a rich feature set including:

- IPMI v2.0 with IPMI v1.5 compatibility
- SDR, FRU, and SEL storage interfaces (SEL stored in MRAM for high-speed/non-volatile/no-wear-out access)
- Intelligent temperature, voltage, and current sensing
- Shelf cooling policy
- Shelf activation and power management/Automatic fail-over/redundancy management
- Alarm controls
- Event notification and flexible alerting policies
- Backplane E-Keying
- CLI, SNMP, RMCP+, HTTP, and HPI
- IPMB Protocol Analyzer GUI for use on PC
- ScorpionWare GUI system manager integration tool on PC available separately

Base Channel Ethernet Switch

The UTC042 provides includes as standard a GbE base channel switch which includes two 1GbE uplink 100/1000 RJ-45 Ports. This switch is fully Layer 2 or Layer 3 managed enabling a comprehensive enterprise-grade routing and switching feature set. It supports Synchronous Ethernet (SyncE) and IEEE1588.

Fat Pipe Fabrics

The UTC042 provides for PCIe fat pipes fabric options:

PCIe Gen3 Switch

- Speed setting for 2.5/5/8 Gbps per lane
- Virtual Switch/Multiple domain/Non-transparent port support to enable partitioning of the system with multiple root complexes
- Includes an extra internal port which enables the GPS precision time-stamping engine (accessible from an AMC root complex board)
- 1024 Gbps aggregate bandwidth/non-blocking/cut-through architecture

40GbE Switch

- Full Layer 2 or 3 management enabling enterprise-grade switching and routing
- Supports Synchronous Ethernet (SyncE) and IEEE1588 to facilitate advanced system synchronization via Ethernet
- 320 Gbps or 640 Gbps aggregate bandwidth options for mixed 10GbE/40GbE and full 40GbE port configurations

SRIO Gen2 x4 Switch

- Supports 1.25/2.5/3.125/5/6.25 Gbps per lane
- 240 Gbps aggregate bandwidth/non-blocking/cut-through architecture

Cross-Bar Switch

- Supports unicasting or multi-casting of any input SERDES lane to one or more output SERDES lane
- 771 Gbps aggregate bandwidth/asynchronous/non-blocking architecture passes through any data rate up to 10.709 Gbps
- SERDES protocol agnostic (no packet framing/handling within the switch, only the AMCs need to understand the protocol)

Fabric Clock Option

The UTC042 has the capability to provide a 100 MHz HCSL PCIe Gen3 compliant fabric clock to each AMC. This option enables the recommended synchronous PCIe clocking approach within the chassis when used in combination with the PCIe fabric.

GPS and General-Purpose Clocks

The MTCA specification defines a set of clocks for telecom and non-telecom applications. The VadaTech UTC042 has the most sophisticated clocking distribution in the market to meet the most stringent requirements such as wireless infrastructure, high speed A/D, etc. The UTC042 supports the following GPS and general-purpose clocking features:

- MTCA.4-compliant low-jitter/low-skew backplane crossbar clock routing matrix for CLK1/CLK2/CLK3 for all AMCs
- Clock disciplining with arbitrary clock frequency output and holdover (Stratum-3 option) including 1PPS regeneration and holdover
- Flexible integration and synchronization between GPS, IEEE1588/SyncE, and NTP clocking enabling Grand Master clock functionality
- 'Any Frequency' high-quality clock generation/jitter cleaning for up to two user clocks
- Supports hitless automatic clock failover for improved reliability
- Optional built-in GPS receiver enables direct time/clock synchronization to the GPS satellite constellation

The UTC042 supports flexible front panel clock port ordering options:

- Two DC-coupled LVCMOS Inputs/Outputs, or two AC-coupled Sine-wave Inputs, or one of each
- Built-in GPS receiver for time/location/clock synchronization plus a DC-coupled LVCMOS Input/Output

GPS Receiver Enabled Features

The UTC042 can be ordered with a GPS Receiver option. The receiver disciplines an onboard high-quality DPLL which is phase/frequency aligned to the atomic clocks in the GPS satellite constellation. The onboard clock synthesis/jitter cleaning capability can be utilized to convert this frequency into any frequency desired while still remaining locked to the GPS atomic clocks.

When the GPS Receiver option is purchased the UTC042 has the capability to re-transmit the incoming GPS data via Ethernet to other nodes in the network in the Trimble TSIP binary protocol format. This GPS data is also sent out the front panel GPS RS-232 serial port in the standard NMEA format for use by external equipment. When the GPS Receiver option is purchased along with the PCIe Fat Pipes fabric, the MCH also provides a precision PCIe Timestamping Engine capability to a PrAMC PCIe Root Complex on the backplane. This engine appears as a PCIe device to the AMC card and a device driver is available which will allow the AMC card to read all GPS status including position, velocity, status, etc., in addition to precision timestamps, time trigger, and time event interrupt functionalities.

IEEE1588 PTP AND NTP Grand Master Clock

The UTC042 can provide Ethernet time services to the chassis networks on both the GbE and 40GbE fabric ports. It can be subordinate to an external PTP or NTP master server or when the GPS receiver option is purchased can act as a Grand Master clock utilizing the precision timing information provided via the GPS receiver and onboard disciplined oscillator.

Synchronous Ethernet

The UTC042 provides a Synchronous Ethernet (SyncE) on the GbE and 40GbE fabric ports. With this feature, ports on the 1G and/or 40G Ethernet switches can be designated as master or slave ports and the Ethernet fabrics within the chassis can be synchronized from end-to-end with external equipment. This feature utilizes advanced telecom-grade network synchronization PLLs to provide exceptional SyncE performance.

JTAG Master/JTAG via Ethernet Virtual Probe

The UTC042 provide JTAG Master Capability to send out configuration data streams via the chassis JTAG Switch Module (JSM) to configure arbitrary JTAG Slave devices on AMC cards. Virtual Probe services are also available to provide JTAG via Ethernet for Xilinx FPGAs. This allows for standard development tools such as Xilinx iMPACT/ChipScope to treat the MCH/JSM combination as if it was a standard JTAG probe. This approach frees the developer from having to attach JTAG probes directly to the AMC or JSM which can be difficult when systems are already fully assembled. It also allows for remote debugging across long distances when required without the need to install additional JTAG equipment on-site.

Specifications

Architecture	
Physical	Dimensions Single module, full-size Width: 2.89" (73.5 mm) Depth 7.11" (180.6 mm)
Type	Controller MicroTCA Carrier Hub
Standards	
MTCA	Type MTCA.0 Revision 1.0
AMC	Type AMC.0
Module Management	IPMI IPMI v2.0 HPM v1.0
ATCA	Type PICMG 3.0 Revision 2.0
Configuration	
Power	UTC042 Option load dependent (as the MCMC and Shelf only < 4W)
Environmental	Temperature See Ordering Options Storage Temperature: -40° to +85°C
	Vibration Operating 9.8 m/s ² (1G), 5 to 500 Hz on each axis
	Shock 30Gs each axis
	Relative Humidity 5 to 95% non-condensing
Front Panel	Interface Connectors RS-232 console port (RJ-45) for serial console and option for GPS NMEA serial data in/out Out-of-band LAN 10/100 from MCMC/Shelf Manager (RJ-45) Two in-band 100/1000/10G from Base Switch Fabric (RJ-45) Two CLK IN/OUT (SMB); CLK IN becomes GPS ANT IN with GPS receiver option Expansion for PCIe Gen 3, SRIO Gen 2, 40GbE, CBS: QSFP+, dual SFP+, Dual RJ-45
	LEDs IPMI Management Control LNK/ACT, OOB PCIe error, ACTIVE MCMC, GPS receiver status, Clock: Ref Good, Freq Lock, Phase Lock, additional LEDs per each fat pipe fabric type
	Mechanical Hot-swap ejector handle with +/-15KV ESD protection
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty	Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

UTC042 – ABC-DEF-GHJ-K00

A = Fabric Switch (Fat Pipes)	D = Front Panel Clocking* ⁴	G = JTAG Virtual Probe	K = Ethernet Switch Management
0 = Base channel switch only* ¹ 1 = PCIe Gen3 2 = SRIO Gen2* ² 3 = 40GbE 4 = Reserved 5 = Reserved 6 = Cross Bar Switch 7 = 10GbE (Layer 2 managed only) 8 = Reserved 9 = PCIe Gen3 (PEX9765)* ⁷	0 = Backplane clocking only 1 = Dual LVCMOS Clock In/Out 2 = Sine Wave In + LVCMOS In/Out 3 = Built-in GPS receiver + LVCMOS In/Out 4 = Dual Sine Wave In 5 = GPS receiver + Sine Wave In 6 = Sine Wave In (up to 17dBm) +TTL/LVCMOS In	0 = No JTAG Virtual Probe 1 = JTAG Virtual Probe	0 = Reserved 1 = VadaTech Stack 2 = Reserved
B = Included TXCVR Modules for Fabric Switch	E = Fabric B Ports Configuration* ⁵	H = MicroTCA Form Factor	
0 = No TXCVR 1 = SFP+ modules (10GBASE-SR) ⁸ 2 = SFP+ modules (10GBASE-LR) ⁸ 3 = SFP+ modules (1Gb LC/SX) ⁸ 4 = SFP+ modules (1Gb LC/LX) ⁸ 5 = SFP+ modules (1000Base-T) ⁸ 6 = QSFP+ module	0 = No Fabric B Ports connected 1 = Fixed 100 MHz HCSL fabric clock for PCIe routed to backplane CLK3/FCLKA channels 2 = General-purpose M-LVDS clock matrix routed to backplane CLK3/FCLKA channels	0 = Reserved 1 = MTCA.1 front panel (retention screws) 2 = Reserved 3 = Reserved	
C = 40GbE Switch Aggregate Bandwidth	F = Clock Holdover Stability	J = Temperature Range and Coating* ⁶	
0 = Switch not 40GbE 1 = 320 Gbps (mix 10GbE/40GbE)* ³ 2 = 640 Gbps (full 40GbE)* ³	0 = Standard (XO) 1 = Stratum-3 (TCXO)	0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Reserved 7 = Reserved	

Notes:

- *1 A base channel GbE with 10GbE uplink switch is always included regardless of the fabric switch (fat pipes) option.
- *2 When the SRIO expansion port is activated by software configuration the AMC 12 slot will not have SRIO due to port multiplexing.
- *3 This option is only applicable when selecting a 40GbE fabric switch option in Option "A".
- *4 Backplane M-LVDS clock routing and related PLL clocking features are provided regardless of the front panel clock option. When GPS (D=3) is selected, additional GPS related features become available such as precision GPS time-stamping via PCIe, GPS data transmission via Ethernet, and GPS serial NMEA data 'Y' cable is provided.
- *5 The Fabric B Ports configuration should be matched to the Ordering Options for CLK3 routing/terminations on the chassis backplane. E=1 is recommended for PCIe fabric applications, otherwise E=2 is recommended for maximum clocking flexibility. E=0 should only be selected if clock routing at the MCH connector would conflict with existing SAS/SATA routing on the backplane. These options correspond with the MCH backplane connector pin-out variations described in the MTCA standard.
- *6 Conduction cooled; temperature is at edge of module. Consult factory for availability.
- *7 Using advanced features of the PCIe switch (e.g. CPU to CPU DMA transfer, endpoint sharing) requires a management processor, which VadaTech supports on a PrAMC. Contact sales for product details.
- *8 This option is only applicable when selecting a 40GbE fabric switch option in option A.

Related Products

AMC720



- Intel® Xeon™ E3 processor
- Up to 16 GB of DDR3 w/ ECC and 32 GB Flash
- PCIe Gen2

UTC010



- Dual -36V DC to -75V DC input, 792W (available in 396W)
- Hot-swappable with support for power module redundancy
- Dual IPMI bus

VT884



- Twelve mid-size single module AMC slots (option to have double modules)
- Dual MicroTCA Carrier Hubs
- PinoutPlus™ support, 2nd tongue on all AMC slots

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2019 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.3 – JUN/20