

VPX770

Intel® Ice Lake-D Processor
Xeon® D-1746TER with
1/10/40/100GbE and PCIe 3U VPX



VPX770

Key Features

- Intel® Ice Lake-D Processor Xeon® D-1746TER
- Dual 100/40GbE or octal 10/1GbE on P1
- Additional Dual GbE 1000BASE-KX on P1
- PCIe x16 Gen3 on P2 (bifurcation by quad x4 or dual x8)
- Serial Over LAN (SOL)
- Front panel 10GbE, Display Port (DP), dual USB3.0 and USB2.0 as RS-232 to USB
- 48GB of DDR4 memory with ECC
- M.2 NVMe Storage socket
- Platform Firmware Resilience (PFR) via on board FPGA for security
- Trusted Platform Management (TPM)

Benefits

- Ice Lake-D embedded hardware security features, AI capability, enhanced connectivity and fast boot
- Low power for balanced performance and power
- Ideal upgrade for Broadwell-DE (such as VPX754)
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



VPX770

The VPX770 is a Processor VPX (PrVPX) in a 3U VPX form factor based on the Intel® Processor Xeon® D-1746TER (Ice Lake-D) for general purpose processing in demanding embedded applications. The D-1746TER has 10 cores with three channels of DDR4 memory.

The VPX770 comes with 48GB of DDR4 memory with ECC and a M.2 NVMe storage socket. The BIOS allows booting from onboard M.2, PXE, and/or USB.

The Module has dual 100/40GbE or octal 10/1GbE with additional dual GbE on P1. The Module provides PCIe x16 Gen3 on P2 which can bifurcate to quad x4 or dual x8.

On the front panel the VPX770 has 2x USB 3.0 type C connectors for extended storage, peripherals, etc., native Display Port (DP), 10GBASE-T as well as three RS-232 ports which connects to the IPMI, BMC and the CPU.

The module utilizes the Intel Bootguard PFR via on board FPGA and Trusted Platform Management (TPM). The FPGA can be reprogrammed by the customer to meet their security beyond what is provided by the PFR.

Linux OS is standard on the VPX770, consult VadaTech for other options.

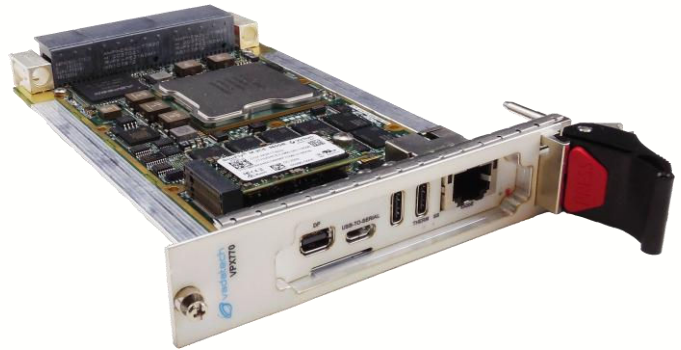


Figure A: VPX770



Figure B: VPX770 Front View



Figure C: VPX770 Top View

Block Diagram

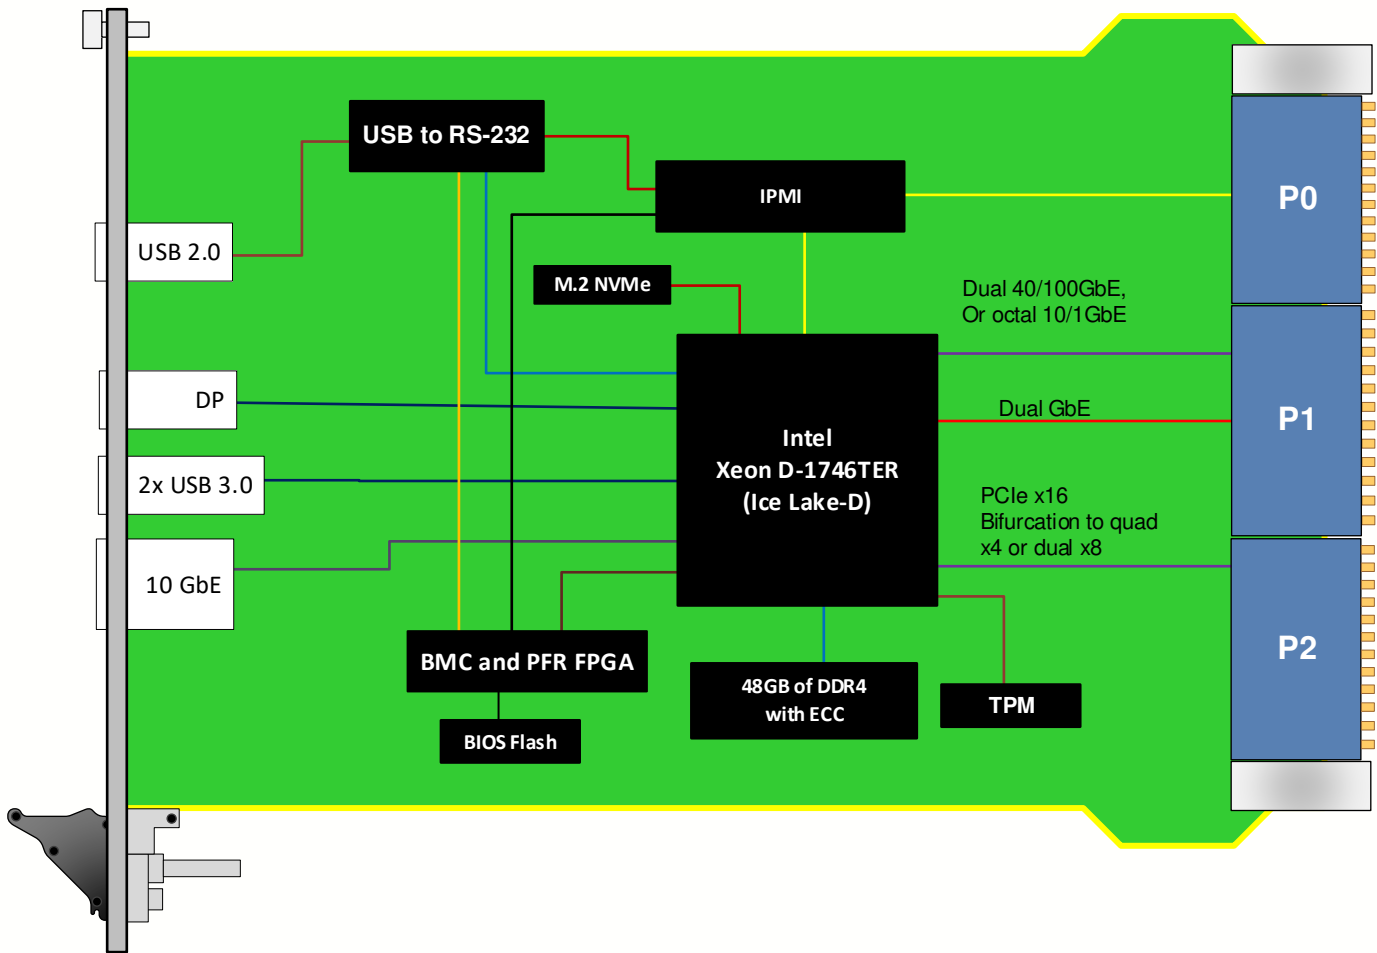


Figure 1: VPX770 Functional Block Diagram



Figure D: VPX770 Front Panel View

Pinout Block Diagram

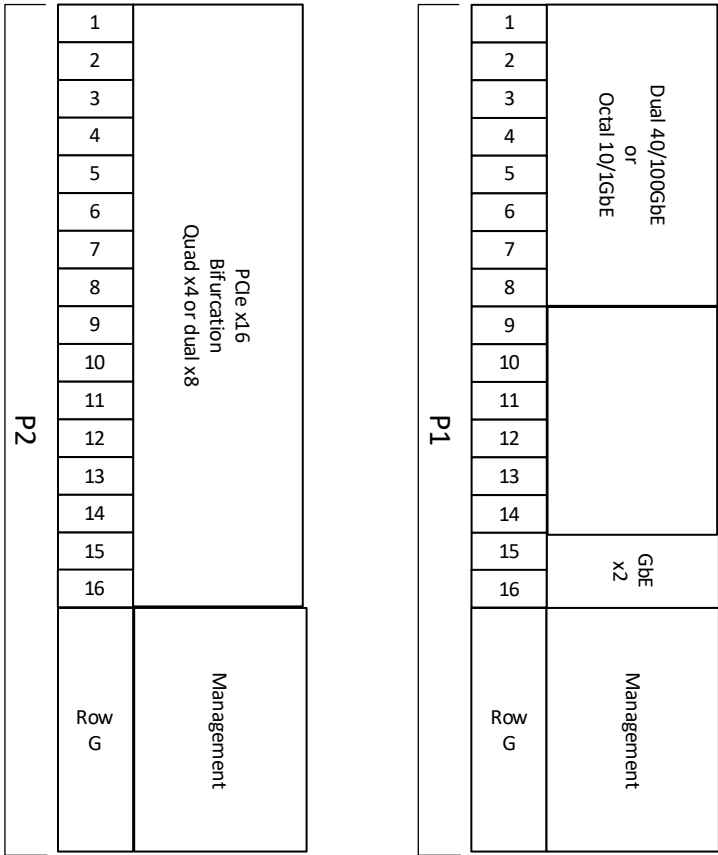


Figure 2: VPX770 Pinout Block Diagram

Specifications

Architecture	
Physical	Dimensions 3U, 1" Pitch
Configuration	
Power	VPX770 ~75W
Processor	CPU Intel® Ice Lake-D Processor Xeon® D-1746TER
	Memory DDR4 48GbE with ECC
	Storage M.2 NVMe
	Lanes Dual 40/100GbE or octal 10/1GbE on P1 and PCIe x16 on P2
VPX Interfaces	Slot Profiles See Ordering Options
	Payload Profile See Figure 2
	Power Supplies On P0: +12V and +3.3V_AUX
Front Panel	Interface Connectors 10GbE-T via RJ-45
	2x USB 3.0 type C connectors and Display Port (DP)
	USB2.0 to RS-232 for each sub-system
	LEDs IPMI, activity and user defined
	Mechanical 3U VPX
Software Support	Operating System Linux (consult VadaTech for other options)
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty	Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VPX770 – ABC-DE0-GHJ

A = DDR4 Memory	D = CPU	G = Applicable Slot Profile
0 = 48GB 1 = Reserved	0 = D-1746TER 1 = Reserved 2 = Reserved	0 = 5HP, VITA 48.1 1 = Reserved
B = M.2 NVMe Storage	E = 3x RS-232 Ports	H = Environmental
0 = None 1 = 1TB 2 = Reserved	0 = USB 2.0 in the front 1 = P2 Connector with no level shifting	See Environmental Specification
C = VPX Connector Type		J = Conformal Coating
0 = 50u Gold Rugged High Speed 1 = KVPX		0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic 3 = Parylene

Environmental Specification

	Air Cooled		Conduction Cooled		
Option H	H = 0	H = 1	H = 2	H = 3	H = 4
Operating Temperature	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes:

*Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

Related Products

VPX516



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package
- High-performance clock jitter cleaner

VPX592



- 3U FPGA carrier for FMC per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

VPX599



- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC 12-bit @ 6.4 GSPS
- Dual DAC 16-bit @ 12 GSPS (AD9162 or AD9164)

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.

DOC NO. 4FM737-12 REV 01 | VERSION 1.5 – SEP/25



vadatech
THE POWER OF VISION