

VPX772

Intel® Ice Lake-D Processor
Xeon® D-1746TER with
1/10/40/100GbE and PCIe 3U VPX



VPX772

Key Features

- Intel® Ice Lake-D Processor Xeon® D-1746TER
- Dual 100/40GbE or octal 10/1GbE on P1
- PCIe x8 Gen3 on P1 (bifurcation to dual x4)
- GbE 1000BASE-T to P2
- Dual USB3.0 to P2
- 48GB of DDR4 memory with ECC
- Dual SSD 128G/each (total of 256GB)
- XMC slot with PCIe x8 Gen3
 - I/O per VITA46.9 P2w7-X8d+X12d
- Serial Over Lan (SOL)
- Platform Firmware Resilience (PFR) via on board FPGA for security
- Trusted Platform Management (TPM)

Benefits

- Ice Lake-D embedded hardware security features, AI capability, enhanced connectivity and fast boot
- Low power for balanced performance and power
- Ideal upgrade for Broadwell-DE (such as VPX754)
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company



vadatech
THE POWER OF VISION



VPX772

The VPX772 is a Processor VPX (PrVPX) in a 3U VPX form factor based on the Intel® Processor Xeon® D-1746TER (Ice Lake-D) for general purpose processing in demanding embedded applications. The D-1746TER has 10 cores with three channels of DDR4 memory.

The VPX772 comes with 48GB of DDR4 memory with ECC and dual SSD with 128G/each (total of 256GB). The BIOS allows booting from onboard SSD, PXE, and/or USB.

The Module has dual 100/40GbE or octal 10/1GbE and PCIe x8 Gen3 (bifurcated to dual x4) to P1. The module has a 1000BASE-T, Dual USB3.0, and XMC I/O based on VITA46.9 P2w7-X8d+X12d. The P2 also has the dual RS-232 coming from the CPU as well as the IPMI health management.

The module utilizes the Intel Bootguard PFR via on board FPGA and Trusted Platform Management (TPM). The FPGA can be reprogrammed by the customer to meet their security beyond what is provided by the PFR.

Linux OS is standard on the VPX772, consult VadaTech for other options.



Figure A: VPX772



Figure B: VPX772 Front View

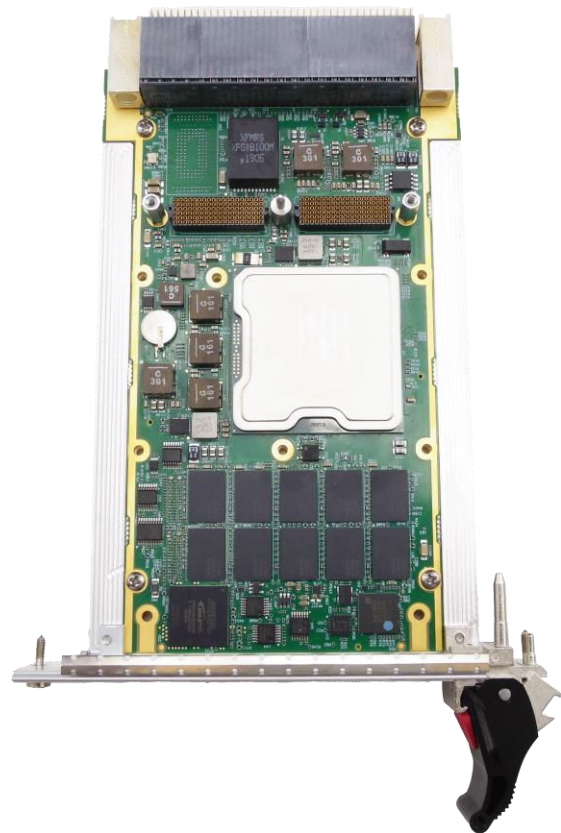


Figure C: VPX772 Top View

Block Diagram

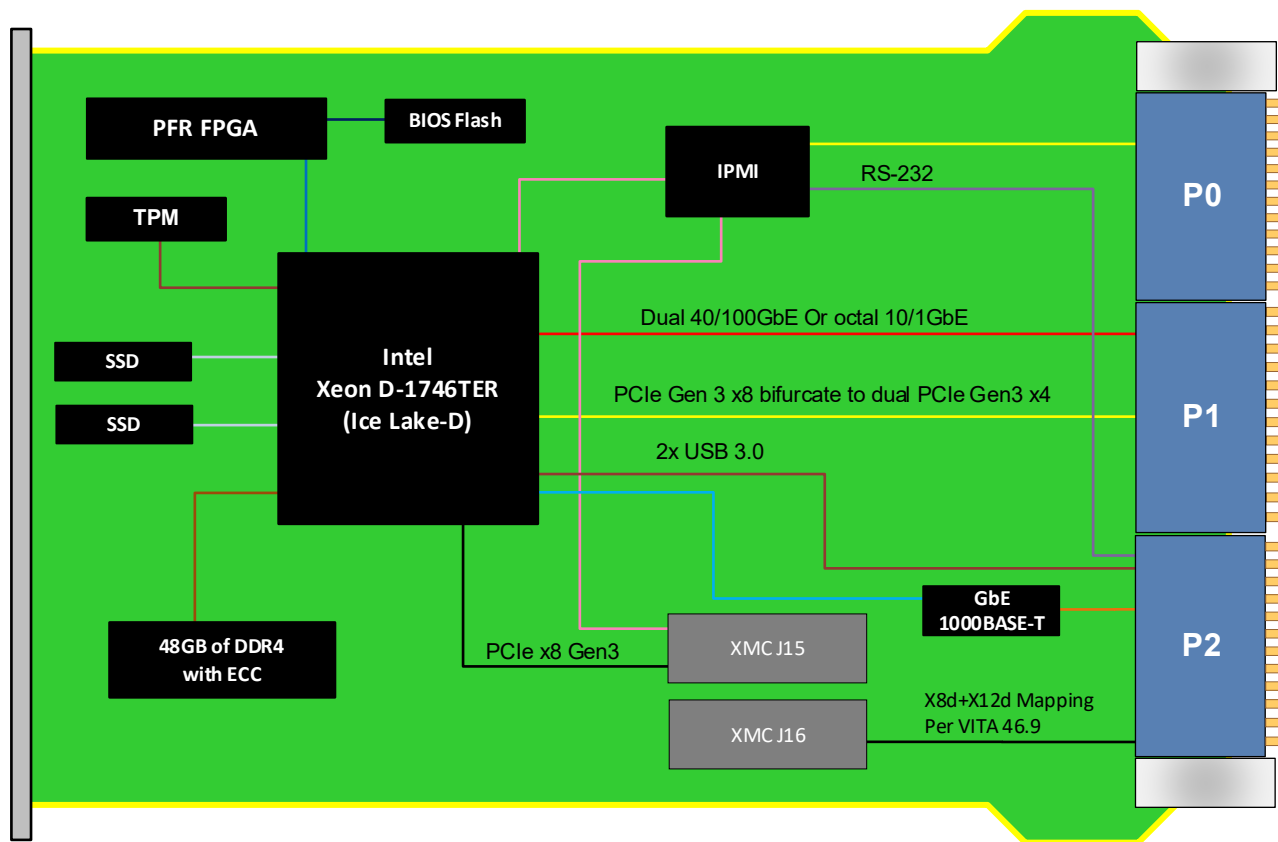


Figure 1: VPX772 Functional Block Diagram



Figure D: VPX772 Front Panel View

Pinout Block Diagram

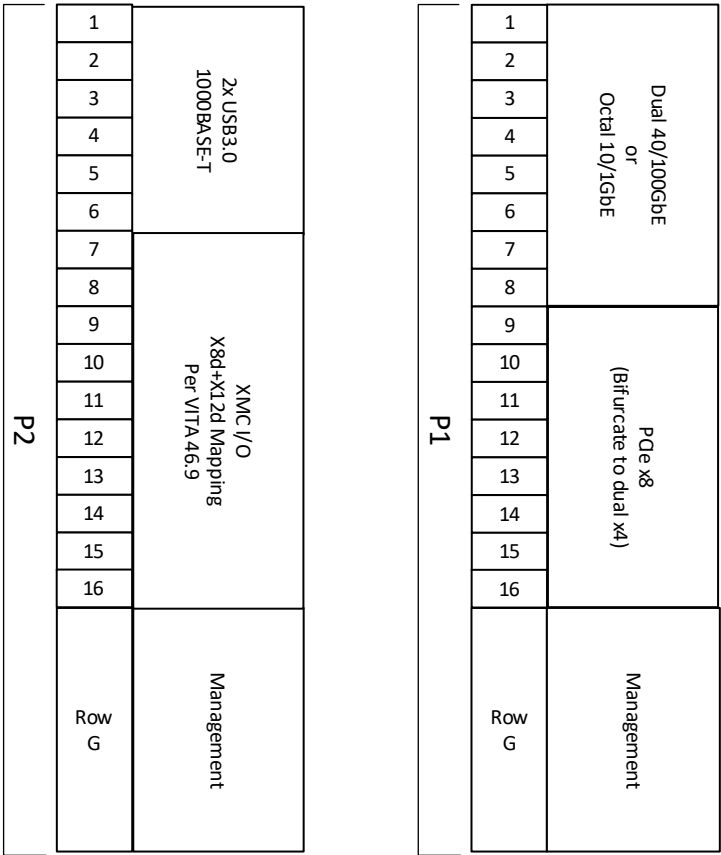


Figure 2: VPX772 Pinout Block Diagram

Specifications

Architecture	
Physical	Dimensions 3U, 1" Pitch
Configuration	
Power	VPX772 ~75W with no XMC
Processor	CPU Intel® Ice Lake-D Processor Xeon® D-1746TER
	Memory DDR4 48GbE with ECC
	Storage Dual SSD 128GB/each (256GB total)
	Lanes Dual 40/100GbE or octal 10/1GbE and PCIe x8 on P1
VPX Interfaces	Slot Profiles See Ordering Options
	Payload Profile See Figure 2
	Power Supplies On P0: +12V and +3.3V_AUX
Front Panel	Interface Connectors 1000BASE-T on P2
	2x USB 3.0 and XMC I/O on P2
	Dual RS-232 from CPU and IPMI Health Management
	LEDs IPMI, activity and user defined
	Mechanical 3U VPX
Software Support	Operating System Linux (consult VadaTech for other options)
Other	
MTBF	MIL Hand book 217-F@ TBD hrs
Certifications	Designed to meet FCC, CE and UL certifications, where applicable
Standards	VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty	Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

VPX772 – ABC-DEF-GHJ

A = DDR4 Memory	D = CPU	G = Applicable Slot Profile
0 = 48GB 1 = Reserved	0 = D-1746TER 1 = Reserved 2 = Reserved	0 = 5HP, VITA 48.1 1 = Reserved
B = Storage	E = XMC Connector	H = Environmental
0 = None 1 = 2x 128GB SSD 2 = Reserved	0 = VITA 42 1 = VITA 61	See Environmental Specification
C = VPX Connector Type	F = VITA 46.9	J = Conformal Coating
0 = 50u Gold Rugged High Speed 1 = KVPX	0 = P2w7-X8d+X12d 1 = Reserved 2 = Reserved	0 = No coating 1 = Humiseal 1A33 Polyurethane 2 = Humiseal 1B31 Acrylic 3 = Parylene

Environmental Specification

Air Cooled			Conduction Cooled		
Option H	H = 0	H = 1	H = 2	H = 3	H = 4
Operating Temperature	AC1* (0°C to +55°C)	AC3* (-40°C to +70°C)	CC1* (0°C to +55°C)	CC3* (-40°C to +70°C)	CC4* (-40°C to +85°C)
Storage Temperature	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C1* (-40°C to +85°C)	C3* (-50°C to +100°C)	C3* (-50°C to +100°C)
Operating Vibration	V2* (0.04 g2/Hz max)	V2* (0.04 g2/Hz max)	V3* (0.1 g2/Hz max)	V3* (0.1 g2/Hz max)	V3 (0.1 g2/Hz max)
Storage Vibration	OS1* (20g)	OS1* (20g)	OS2* (40g)	OS2* (40g)	OS2* (40g)
Humidity	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing	95% non-condensing

Notes:

*Nomenclature per ANSI/VITA 47. Contact local sales office for conduction cooled (H = 2, 3, 4).

Related Products

VPX516



- 3U FPGA carrier for FPGA Mezzanine Card (FMC) per VITA 46 and VITA 57
- Xilinx Virtex-7 690T FPGA in FFG-1761 package
- High-performance clock jitter cleaner

VPX592



- 3U FPGA carrier for FMC per VITA 46 and VITA 57
- Xilinx Kintex UltraScale™ XCKU115 FPGA
- High-performance clock jitter cleaner

VPX599



- Xilinx Kintex UltraScale™ XCKU115 FPGA
- Dual ADC 12-bit @ 6.4 GSPS
- Dual DAC 16-bit @ 12 GSPS (AD9162 or AD9164)

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.5 – AUG/25