FMC Dual QSFP+ for 10 GbE/40GbE/SRIO PCIE/40Gb InfiniBand/AURORA

FMC107





KEY FEATURES

- FPGA Mezzanine Card (FMC) per VITA-57
- Single width
- Two QSPF+ cages for 10GbE/SRIO/PCIE and Aurora
- RoHS compliant

The FMC107 is an FPGA Mezzanine Module per VITA 57 specification. The FMC107 has two QSFP+ cages which allows for dual 10GbE/40GbE/SRIO/PCIE/40Gb InfiniBand and Aurora to be routed to appropriate FMC pins.

Note: The Carrier must have no component on the top side for 46mm so that this module would fit property. All VadaTech FMC Carriers do provide this clearance.

FMC Dual QSFP+ for 10GbE/40GbE/SRIO PCIE/40Gb InfiniBand/AURORA

SPECIFICATIONS

| Architecture | | |
|----------------------|---|---|
| Physical | Dimensions | Single-width |
| | | Width: 69mm |
| | | Depth: 76.5mm |
| Туре | FMC | 10GbE/SRIO/PCIE/AURORA |
| | | Single FMC slot |
| Standards | | |
| FMC | VITA57 | ANSI/VITA 57.1-2008 |
| Configuration | | |
| Power | FMC107 | <1w without the QSFP Modules |
| Environmental | Temperature | Operating Temperature: 0° to 65° C (Air flow requirement is to be greater than 400 LFM) |
| | | Storage Temperature: -40° to +90° C |
| | Vibration | 1G, 5-500Hz each axis |
| | Shock | 30Gs each axis |
| | Relative Humidity | 5 to 95 percent, non-condensing |
| Front Panel | Interface Connectors | QSFP+ |
| | LEDs | Present and User define. |
| Other | | |
| MTBF | MIL Handbook 217-F > TBD. | |
| Certifications | Designed to meet FCC, CE and UL certifications where applicable | |
| Standards | VadaTech is certified to both the ISO9001:2000 and AS9100B:2004 standards | |
| Compliance | RoHS and NEBS | |
| Warranty | Two (2) years. | |
| Trademarks and Logos | The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their | |
| | respective owners. AdvancedMC TM and the AdvancedTCA TM logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice. | |

Email: info@vadatech.com • www.vadatech.com

FMC Dual QSFP+ for 10GbE/40GbE/SRIO PCIE/40Gb InfiniBand/AURORA


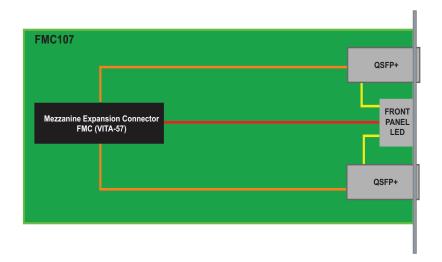


FIGURE 1. FMC107 Functional Block Diagram

FIGURE 2. FMC107 Front panel



FMC Dual QSFP+ for 10GbE/40GbE/SRIO PCIE/40Gb InfiniBand/AURORA

ORDERING OPT

FMC107 - A00 - 000 - GHJ

A = QSFP+ Transceivers

- 0 = None
- 1 = Single QSFP+ Transceiver loaded
- 2 = Dual QSFP+ Transceiver loaded

G = FMC Board Spacing

- 0 = 10 mm (per VITA-57 specification)
- 1 = 17.5 mm *

H = Operating Temp

- 0 = Commercial
- 1 = Industrial

J = Conformal Coating

- 0 = None
- 1 = Humiseal 1A33 Polyurethane
- 2 = Humiseal 1B31 Acrylic
- * For use with carriers that require higher mating clearance, such as VadaTech AMC595. Requires full size AMC.





Document No. 4FM430-05 REV. OI.Date:. June 2016 Pass five