

ATC605

ATCA Storage Blade with RAID and iSCSI



ATC605

Key Features

- Internet Small Computer System Interface (iSCSI) and Network Attached Storage (NAS), could be Network File System (NFS) or Common Internet File System (CIFS)
- Line rate iSCSI hardware off load engine at 40/10GbE (100G supported but not at the line rate)
- Fully compliant with the IETF RFC3270 and RFC4171
- RAID-on-Chip (ROC) dedicated I/O Processor off-loads the RAID stack
- Redundant Array of Independent Disks (RAID) levels 0, 1, 5 and 6
- RAID spans 10, 50 and 60
- Battery pack option to prevent data loss
- Utilizes VadaTech's proven IPMI Management Controller

Benefits

- Hardware iSCSI off load engine for line rate speed
- High-performance ROC offload engine provides for high data integrity, with battery option for protection from data loss on power failure
- Flexible configuration through LSI MegaRAID software
- Electrical, mechanical, software, and system-level expertise in house
- Full system supply from industry leader
- AS9100 and ISO9001 certified company

Advanced TCA®



vadatech
THE POWER OF VISION



ATC605

The ATC605 is an AdvancedTCA Network Attached Storage Blade incorporating an onboard Intel Xeon E3-1505M and a high-performance hardware off-load engine for iSCSI Target, with an integrated back-end RAID storage subsystem.

The ATC605 has a dual 100/40/10GbE to the Fabric channel. The unit also has a 40GbE to the up-date channel that allows fail over across two of the ATC605 in the redundant configuration.

An advanced ROC co-processor off-loads the main CPU. Its main features include RAID levels 0, 1, 5 and 6 with RAID spans 10, 50 and 60. In addition, the ROC checks for consistency of background data integrity and patrol read for media scanning and repairing. The ROC has an optional battery pack to prevent data loss in the event of a power failure.

Also auto resume after loss of system power during array rebuild or reconstruction, load balancing, checks consistency for background data integrity. The RAID can be managed via a sophisticated GUI, running LSI MegaRAID software.

The storage devices are either NVMe style (two per AMC) or SATA SSD (one per AMC). See Ordering Options A and D.

The ATC605 implements IPMI 2.0 for its management and payload.



Figure 1: ATC605

iSCSI

The VadaTech iSCSI Target has the following features:

- Fully compliant with IETF RFC3270 (MPLS)
- Fully compliant with IETF RFC4171 Internet Storage Name Service (iSNS)
- IP-based protocol breaks the distance barrier using Ethernet infrastructure
- Enables enterprise-class IP storage in an ATCA/AMC form-factor
- Multi-path capable
- Automatic load balancing across the 100/40/10GbE ports
- Full error recovery (ERL2) across the redundant links

ROC

The ROC solution supports the following features:

- RAID levels 0, 1, 5, 6
- RAID spans 10, 50, 60
- Independent I/O processor operates in parallel with the iSCSI processor
- True hardware RAID 5 & 6 parity acceleration
- NVMe or SAS/SATA SSD
- Fast DDR3 cache memory
- Battery-backed cache memory (optional)
- RAID Level Migration (RLM)
- Online Capacity Expansion (OCE)
- Configuration on Disk (COD)
- Patrol Read with background repair
- Flexible Hot Spare configurations with automatic rebuild
- Drives can be put into multiple virtual disks, multiple arrays, multiple spans
- Unique SAS/NVMe backplane to AMC carrier conversion for LEDs, status, etc.
- Audible alarm
- RAID management software included for BIOS, command line and GUI based configuration, monitoring, and maintenance

Removable Storage Carrier

The ATC605 accepts up to four AMC style storage modules, such as VadaTech AMC641 (when NVMe storage selected) or AMC624 (when SATA storage selected). Each of the four storage bays can be removed individually. Note that when SATA option is selected each AMC contains only a single SSD drive since the AMC must be mid-size.

Block Diagram

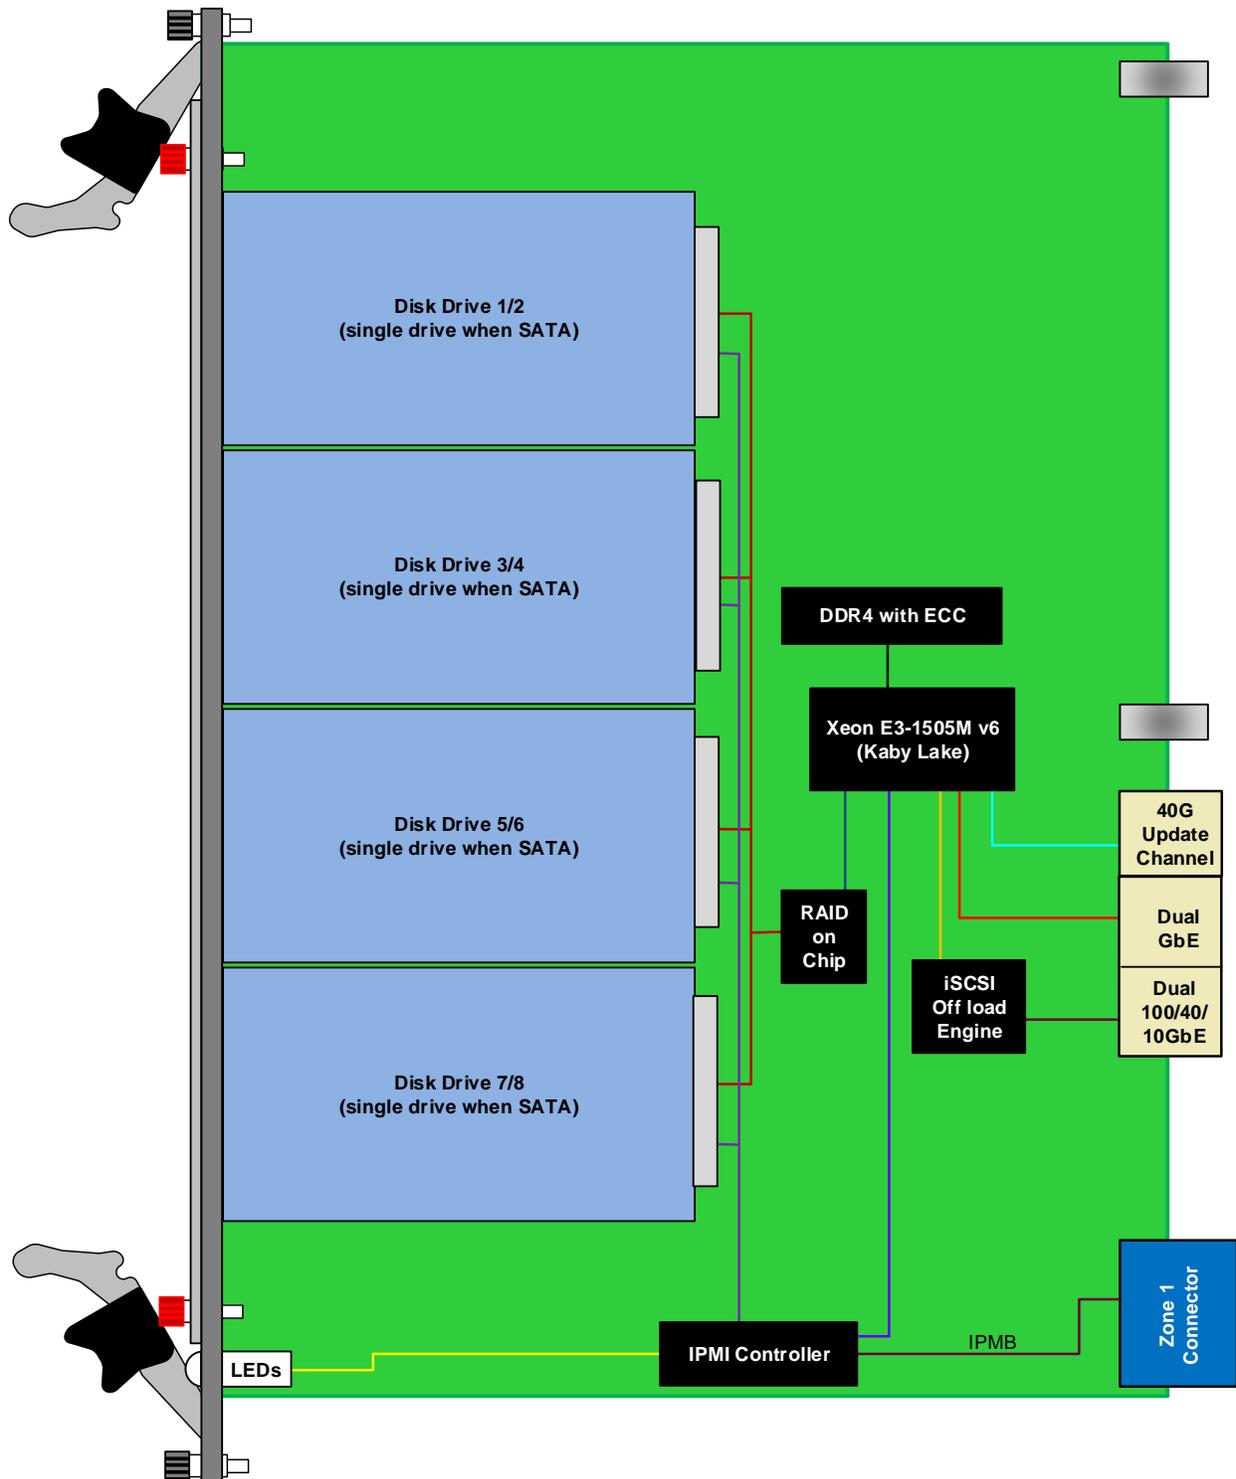


Figure 2: ATC605 Functional Block Diagram

Specifications

Architecture		
Physical	Dimensions	Width: 12.69" (322.25 mm) Depth: 11.02" (280 mm)
Type	ATCA Storage	Xeon-D main processor, iSCSI off load Engine, ROC with eight removable SSDs
Standards		
Module Management	IPMI	IPMI v2.0 and PICMG 3.0
100/40/10GbE	KR	100GbE/40GbE/10GbE to the fabric channel
GbE	1000-BaseT	GbE 1000-BaseT 10/100/1000 to the Base Channel
RAID	Type	RAID Type 0, 1, 5, 6, 10, 50, and 60
PICMG	ATCA	PICMG 3.0 R3.0
Configuration		
Power	ATC605	~100W (no storage)
Environmental	Temperature	See Ordering Options Storage Temperature: -40° to +85°C
	Vibration	1G, 5 to 500 Hz each axis
	Shock	Operating 30Gs on each axis
	Relative Humidity	5 to 95% non-condensing
Front Panel	Interface Connectors	Micro USB for RS-232 (Management and CPU)
	LEDs	Activity/Link IPMI Management Control
Software Support	Operating System	Linux
Other		
MTBF		MIL Hand book 217-F@ TBD hrs
Certifications		Designed to meet FCC, CE and UL certifications, where applicable
Standards		VadaTech is certified to both the ISO9001:2015 and AS9100D standards
Warranty		Two (2) years, see VadaTech Terms and Conditions

INTEGRATION SERVICES AND APPLICATION-READY PLATFORMS

VadaTech has a full ecosystem of OpenVPX, ATCA and MTCA products including chassis platforms, shelf managers, AMC modules, Switch and Payload Boards, Rear Transition Modules (RTMs), Power Modules, and more. The company also offers integration services as well as pre-configured Application-Ready Platforms. Please contact VadaTech Sales for more information.

Ordering Options

ATC605 – AB0-D00-00J

A = NVMe Disk (all 8 disks are identical)* 0 = No disc, SATA based 1 = 1 TB (total of 8 TB) 2 = 2 TB (total of 16 TB) 3 = 3.2 TB (total of 26.6 TB) 4 = Reserved (future storage size) 5 = Reserved (future storage size) 6 = Reserved (future storage size) 9 = NVMe, no discs	D = 2.5" Disk (all 4 disks are identical)* 0 = No disk, NVMe based 1 = 7.68 TB SATA (total of 30.72 TB) 2 = 7.68 TB U.2 NVMe (total of 30.72 TB) 9 = SATA, no disks	
B = RAID Memory Battery Back-up 0 = No Battery back-up 1 = Battery back-up included		
		J = Temperature Range and Coating 0 = Commercial (–5° to +55°C), No coating 1 = Commercial (–5° to +55°C), Humiseal 1A33 Polyurethane 2 = Commercial (–5° to +55°C), Humiseal 1B31 Acrylic 3 = Industrial (–20° to +70°C), No coating 4 = Industrial (–20° to +70°C), Humiseal 1A33 Polyurethane 5 = Industrial (–20° to +70°C), Humiseal 1B31 Acrylic 6 = Extended (–40° to +85°C), Humiseal 1A33 Polyurethane** 7 = Extended (–40° to +85°C), Humiseal 1B31 Acrylic**

Notes:

*Contact VadaTech for other disc size options and for SAS SSDs. Mixed disk types are not supported (so **must** be A=0 or D=0).

**Conduction cooled; temperature is at edge of module. Consult factory for availability.


Related Products

ATC122



- ATCA Processing Carrier with a standard PCIe edge Module
- Xeon E3-1268L V3 Processor with 32 GB ECC
- Quad Core @ 2.3 GHz or Turbo Frequency @ 3.3 GHz

ATC133



- 10G ATCA Carrier
- Xilinx Virtex-7 FPGA (XC7V690T in FFG1761 package)
- Crossbar switch to connect FPGA to full mesh of backplane fabric

VT830



- 19" rackmount 6U ATCA Chassis with integrated Switch and Shelf Manager
- 10GbE/GbE Managed Layer 2
- 40GbE/10GbE/GbE Managed Layer 3

Contact

VadaTech Corporate Office

198 N. Gibson Road, Henderson, NV 89014

Phone: +1 702 896-3337 | Fax: +1 702 896-0332

Asia Pacific Sales Office

7 Floor, No. 2, Wenhui Street, Neihu District, Taipei 114, Taiwan

Phone: +886-2-2627-7655 | Fax: +886-2-2627-7792

VadaTech European Sales Office

VadaTech House, Bulls Copse Road, Southampton, SO40 9LR

Phone: +44 2380 016403

info@vadatech.com | www.vadatech.com

Choose VadaTech

We are technology leaders

- First-to-market silicon
- Constant innovation
- Open systems expertise

We commit to our customers

- Partnerships power innovation
- Collaborative approach
- Mutual success

We deliver complexity

- Complete signal chain
- System management
- Configurable solutions

We manufacture in-house

- Agile production
- Accelerated deployment
- AS9100 accredited



vadatech
THE POWER OF VISION

Trademarks and Disclaimer

The VadaTech logo is a registered trademark of VadaTech, Inc. Other registered trademarks are the property of their respective owners. AdvancedTCA™ and the AdvancedMC™ logo are trademarks of the PCI Industrial Computers Manufacturers Group. All rights reserved. Specification subject to change without notice.

© 2020 VadaTech Incorporated. All rights reserved.
DOC NO. 4FM737-12 REV 01 | VERSION 1.7 – FEB/20